

Date		Project	
Type		Part Number	



ALL-IN-ONE PERFORMANCE LIGHTING

DECO Series

Double Ring Ceiling Light

Brighten your space with Reno's Deco double-ring ceiling fixture, designed to deliver energy-efficient LED illumination while adding a stylish focal point to any room. It provides bright, uniform lighting—ideal for residential or commercial settings like hallways, offices, and living rooms. Its sleek silhouette and durable construction ensure lasting performance and a clean, contemporary look.



PRODUCT FEATURES

- ETL/FCC Certified
- 120V TRIAC Dimming
- Operating temperature: -4°F to +104°F (-20°C to +40°C)
- IP20 Rated Damp location
- Frosted Polycarbonate Lens
- Brushed Nickel (Stainless Steel) Finish
- Rated Lifespan: L70 ~50,000 hrs
- 10 year limited warranty

KEY SPECIFICATIONS

Voltage	120V
Wattage	Selectable Wattages 10" - 8/12/16W 12" - 8/12/16W 14" - 12/16/22W 16" - 16/22/30W
Size	10", 12", 14", 16"
Power Factor	>0.9
CCT	27/30/35/40/5000K
CRI	>80
Efficacy	75lm/W
Lumens	600 – 2,250 lm
Beam Angle	120°
Dimming	120V TRIAC
Mounting	Ceiling, Wall
Applications	Commercial, Residential, Multi-Res



SPECIFICATIONS – 10" MULTI POWER (8/12/16W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R31021	RENO-CLD-10"-BN-MW-MCCT-G2	8W	120V	600 lm	75 lm/W	2700K
				600 lm	75 lm/W	3000K
				600 lm	75 lm/W	3500K
				600 lm	75 lm/W	4000K
				600 lm	75 lm/W	5000K
		12W	120V	900 lm	75 lm/W	2700K
				900 lm	75 lm/W	3000K
				900 lm	75 lm/W	3500K
				900 lm	75 lm/W	4000K
				900 lm	75 lm/W	5000K
		16W	120V	1,200 lm	75 lm/W	2700K
				1,200 lm	75 lm/W	3000K
				1,200 lm	75 lm/W	3500K
				1,200 lm	75 lm/W	4000K
				1,200 lm	75 lm/W	5000K

SPECIFICATIONS – 12" MULTI POWER (8/12/16W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R31022	RENO-CLD-12"-BN-MW-MCCT-G2	8W	120V	600 lm	75 lm/W	2700K
				600 lm	75 lm/W	3000K
				600 lm	75 lm/W	3500K
				600 lm	75 lm/W	4000K
				600 lm	75 lm/W	5000K
		12W	120V	900 lm	75 lm/W	2700K
				900 lm	75 lm/W	3000K
				900 lm	75 lm/W	3500K
				900 lm	75 lm/W	4000K
				900 lm	75 lm/W	5000K
		16W	120V	1,200 lm	75 lm/W	2700K
				1,200 lm	75 lm/W	3000K
				1,200 lm	75 lm/W	3500K
				1,200 lm	75 lm/W	4000K
				1,200 lm	75 lm/W	5000K

SPECIFICATIONS – 14" MULTI POWER (12/16/22W)


Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R31023	RENO-CLD-14"-BN-MW-MCCT-G2	12W	120V	900 lm	75 lm/W	2700K
				900 lm	75 lm/W	3000K
				900 lm	75 lm/W	3500K
				900 lm	75 lm/W	4000K
				900 lm	75 lm/W	5000K
		16W	120V	1,200 lm	75 lm/W	2700K
				1,200 lm	75 lm/W	3000K
				1,200 lm	75 lm/W	3500K
				1,200 lm	75 lm/W	4000K
				1,200 lm	75 lm/W	5000K
		22W	120V	1,650 lm	75 lm/W	2700K
				1,650 lm	75 lm/W	3000K
				1,650 lm	75 lm/W	3500K
				1,650 lm	75 lm/W	4000K
				1,650 lm	75 lm/W	5000K

SPECIFICATIONS – 16" MULTI POWER (16/22/30W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R31024	RENO-CLD-16"-BN-MW-MCCT-G2	16W	120V	1,200 lm	75 lm/W	2700K
				1,200 lm	75 lm/W	3000K
				1,200 lm	75 lm/W	3500K
				1,200 lm	75 lm/W	4000K
				1,200 lm	75 lm/W	5000K
		22W	120V	1,650 lm	75 lm/W	2700K
				1,650 lm	75 lm/W	3000K
				1,650 lm	75 lm/W	3500K
				1,650 lm	75 lm/W	4000K
				1,650 lm	75 lm/W	5000K
		30W	120V	2,250 lm	75 lm/W	2700K
				2,250 lm	75 lm/W	3000K
				2,250 lm	75 lm/W	3500K
				2,250 lm	75 lm/W	4000K
				2,250 lm	75 lm/W	5000K


DIMENSIONS

10"



Diameter: 10" (254 mm)


Height: 2.4" (61 mm)



Diameter


Weight: 1.2 lbs (0.5 kg)

12"

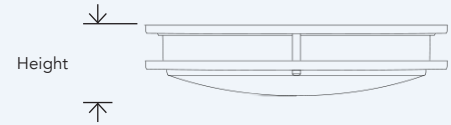

Diameter: 12" (304.8 mm)

Height: 2.6" (67 mm)



Diameter


Weight: 1.7 lbs (0.8 kg)

14"



Diameter: 14" (355.6 mm)

Height: 2.6" (65 mm)



Diameter


Weight: 2.3 lbs (1.0 kg)

16"



Diameter: 16" (406.4 mm)

Height: 2.6" (66 mm)

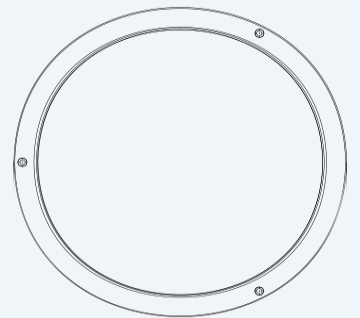

Diameter

Weight: 3.1 lbs (1.4 kg)