

INSTRUCTIONS FOR THE FOLLOWING FIXTURES

ORDER#	MODEL#
R51070	RENO-HTSL-2FT-DV-MCCT-WH
R51071	RENO-HTSL-2FT-DV-MCCT-BK
R51072	RENO-HTSL-3FT-DV-MCCT-WH
R51073	RENO-HTSL-3FT-DV-MCCT-BK
R51074	RENO-HTSL-4FT-DV-MCCT-WH
R51075	RENO-HTSL-4FT-DV-MCCT-BK
R51076	RENO-HTSL-6FT-DV-MCCT-WH
R51077	RENO-HTSL-6FT-DV-MCCT-BK

Read Instruction manual carefully to ensure proper installation.
Please keep this instruction manual for future using!

⚠ WARNING

To avoid the risk of fire, or electric shock this product should be installed, inspected, and maintained by a qualified electrician only. Installation should be completely by an individual familiar with the construction and operation of the luminaire. Installation of luminaire must be in accordance with nation and local building and electrical codes.

Safety Warning:

To avoid electric shock:

Be certain electrical power is OFF before and during installation and maintenance.

Luminaire must be supplied by a wiring system with an equipment grounding conductor.

To avoid burning hands:

Make sure lens and housing are cool when performing maintenance.

To avoid product degradation:

Make sure the wire supply voltage is the same as the luminaire supply

Use proper supply wiring as specified on the luminaire nameplate.

Avoid use in environments containing sulfur, chlorine, or other halides, methyl acetate or ethyl acetate, cyanoacrylates, glycol ethers, formaldehyde or butadiene.

Notes:

Instructions do not cover all details and all possible product configurations.

Do not restrict luminaire ventilation.

Ensure LED luminaire is not covered with material that will prevent convection or conduction cooling.

Ensure LED luminaire has the correct polarity before installation


Avoid exposing wiring to metal edges and sharp objects.

Maintenance:


Perform visual, electrical, and mechanical inspections on a regular basis. The environment and frequency of use should determine this. However, it is recommended that checks be made at least once a year. Electrically check to make sure that all connections are clean and tight. Mechanically check that all parts are properly assembled.

INSTALLATION DIMENSION


■ Dip Switch for CCT

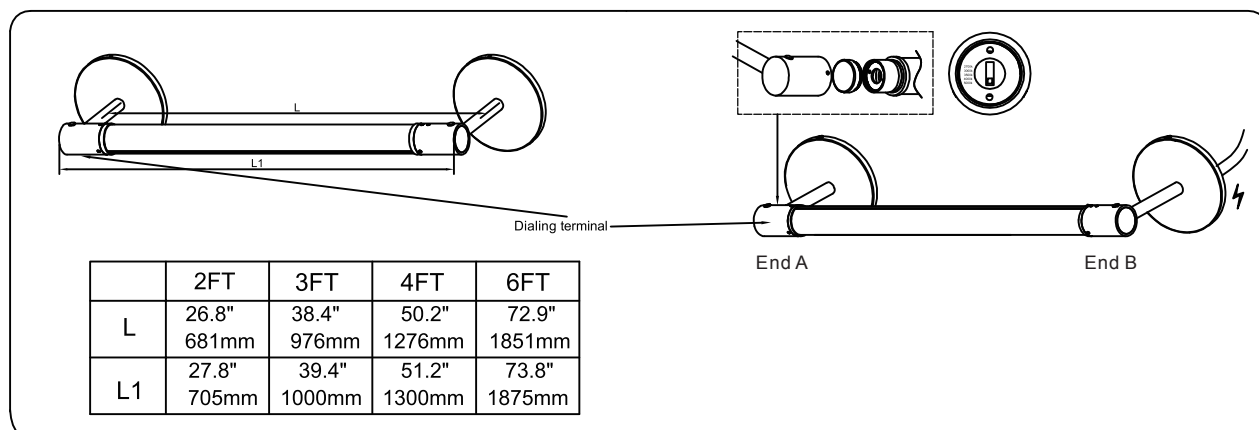


WIRING DIAGRAM

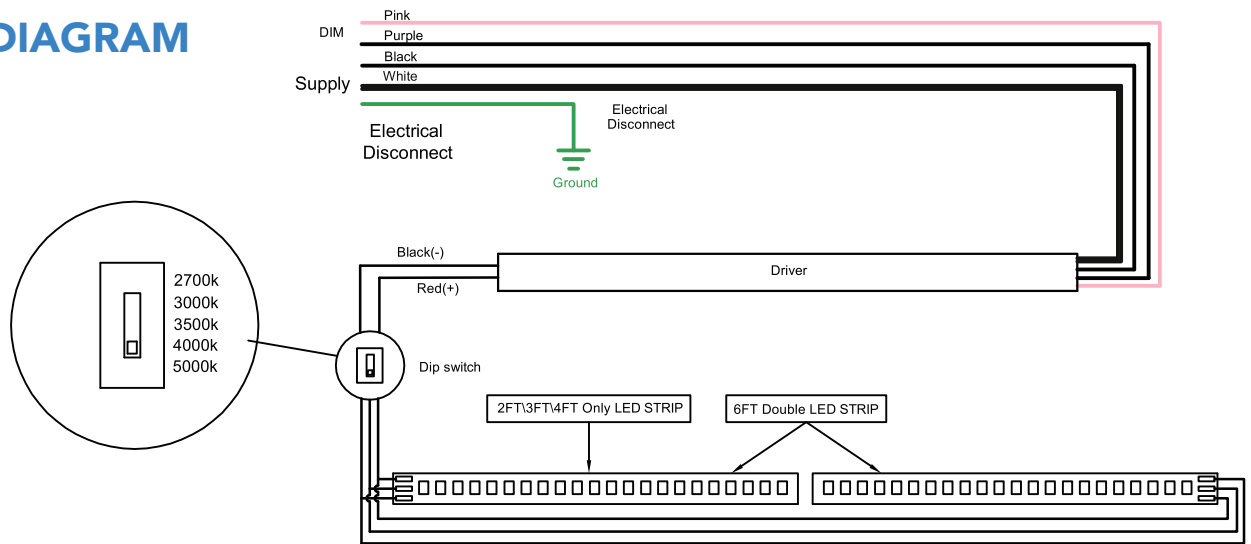

WALL MOUNT

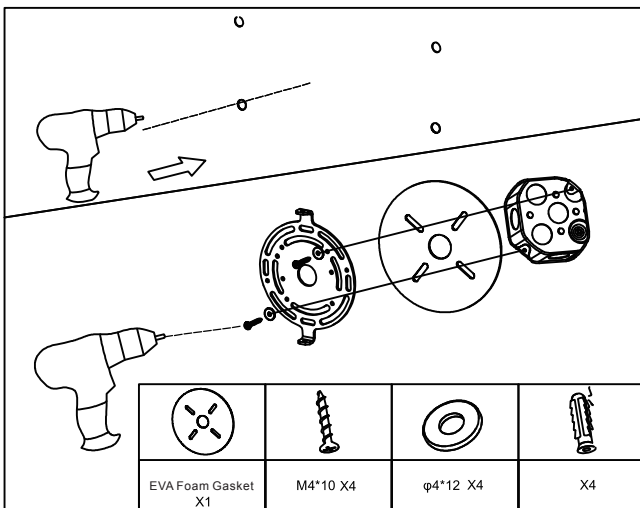


A) Drill holes on the wall and fasten the mounting plate with screws. Please not note the EVA foam gasket need to be installed on End B to ensure waterproof sealing before securing the mounting plate to junction box.

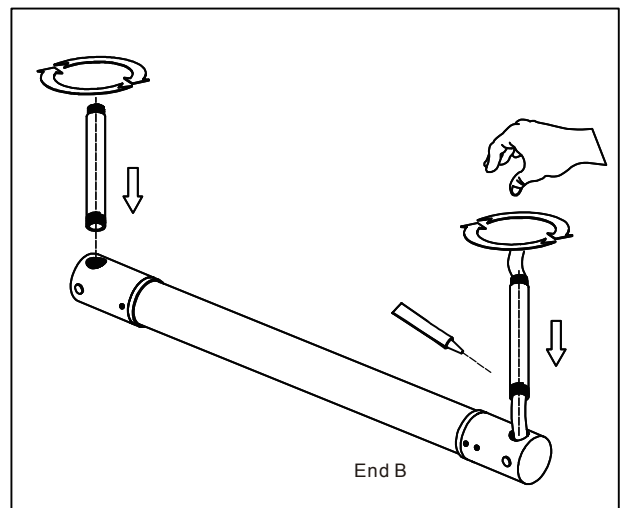


B) For End B , apply the appropriate amount of waterproof sealant onto the threaded section of the rod, then secure the rod to the fixture.

WALL MOUNT

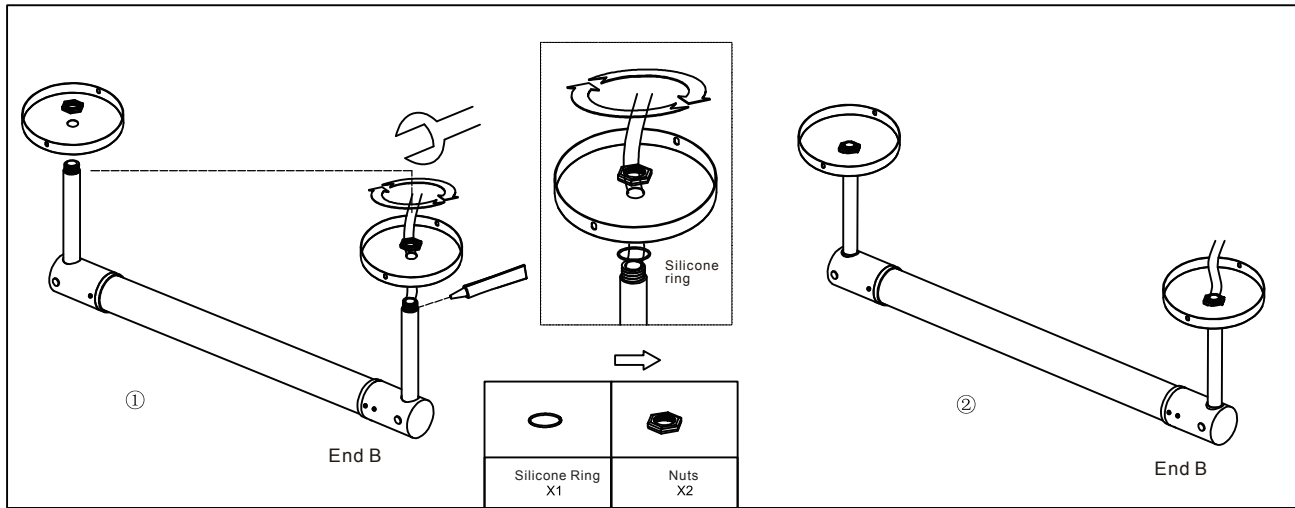


C) Secure the rod to the canopy using nuts. Note: For End B, install the silicone ring onto the threaded section of the rod first, then apply the appropriate amount of waterproof sealant, then secure the rod to the canopy.

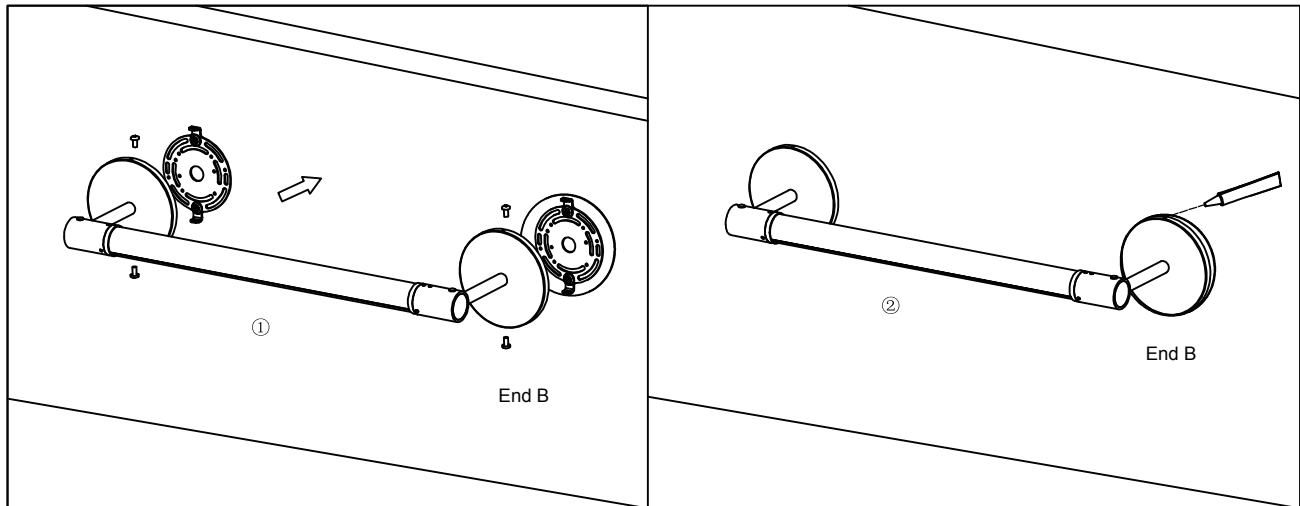

D) Secure the fixture to the mounting plate using screws, then apply the appropriate amount of waterproof sealant around the edges of the canopy and on the screw areas to ensure proper waterproof sealing on End B.


INSTALLATION INSTRUCTION

■ Extension Rod Kit Assembly

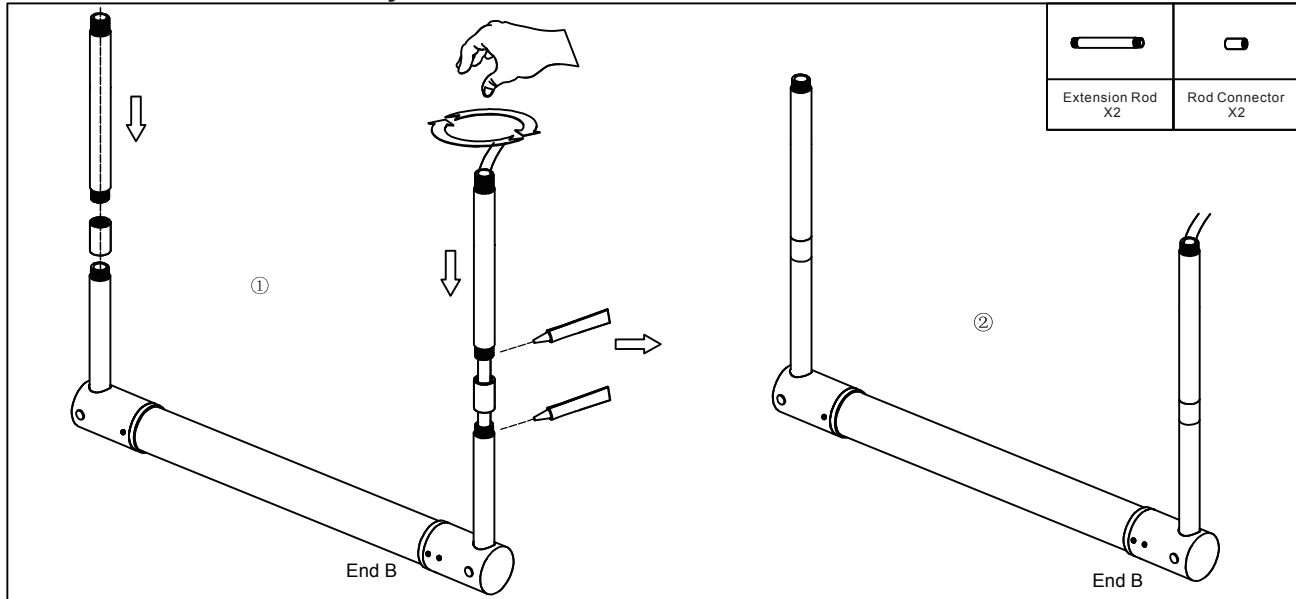


A) Extension rod with rod connector provided as additional accessories which used when long arm needed.

Connect the extension rod to the existing rod, and apply waterproof sealant to the threaded section of the rod for End B before installation.

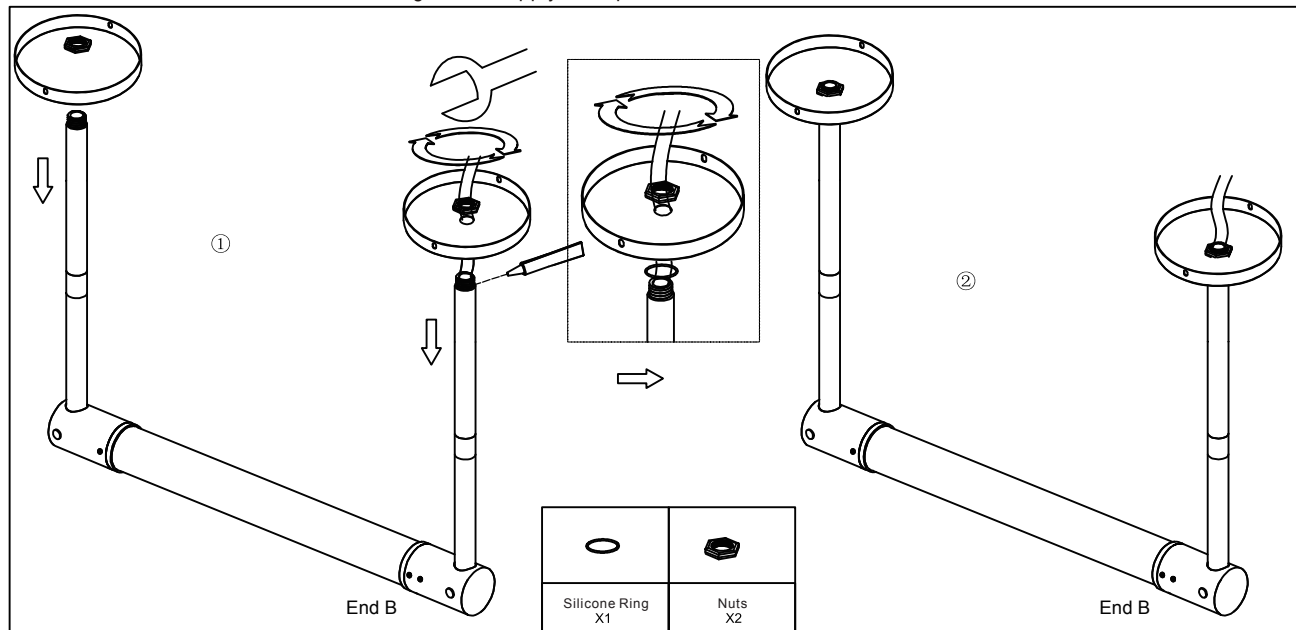


B) Secure the rod to the canopy using nuts. Note: For End B, install the silicone ring onto the threaded section of the rod first, then apply the appropriate amount of waterproof sealant, then secure the rod to the canopy.

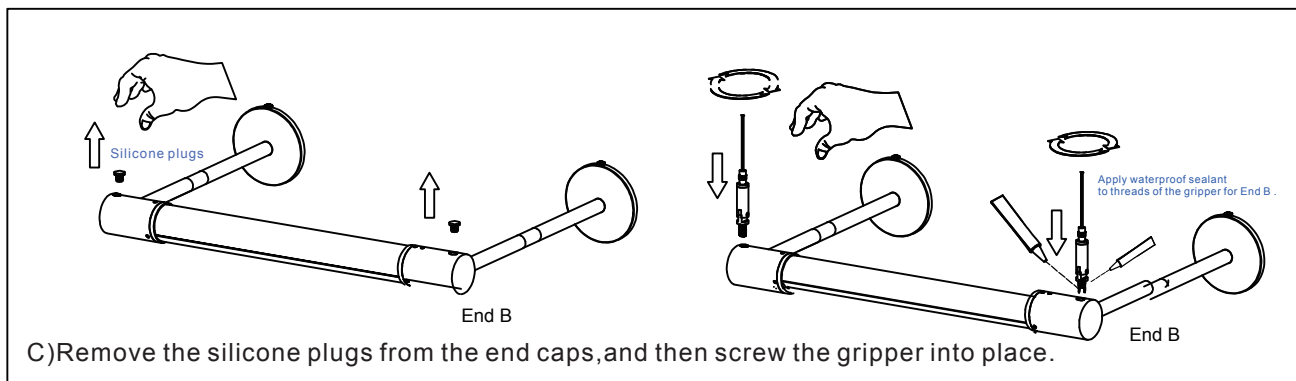


C) Remove the silicone plugs from the end caps, and then screw the gripper into place.

EXTENSION ROD KIT ASSEMBLY

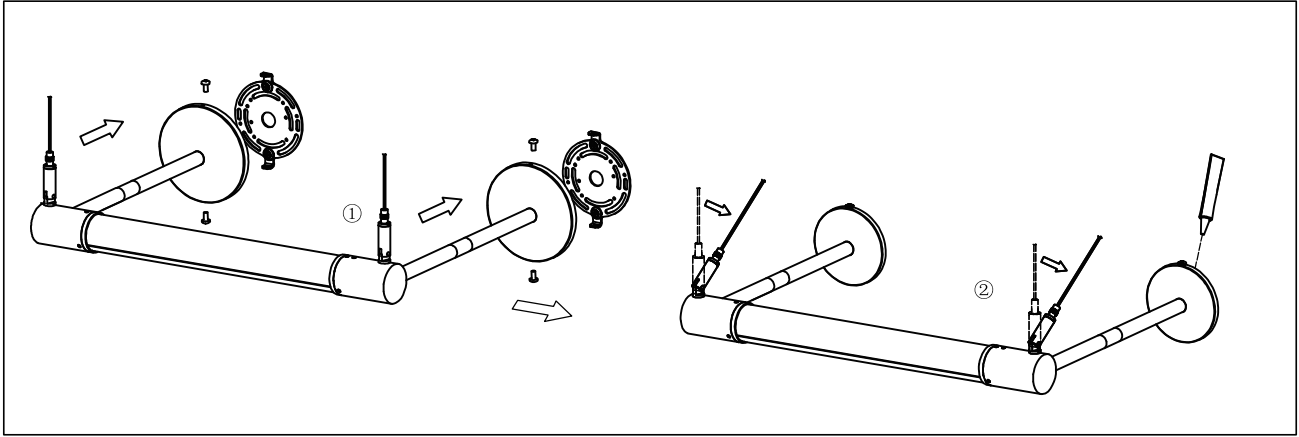


D) Secure the fixture to the mounting plate using screws, then apply the appropriate amount of waterproof sealant around the edges of the canopy and on the screw areas to ensure proper waterproof sealing; then adjust the gripper to the desired angle.

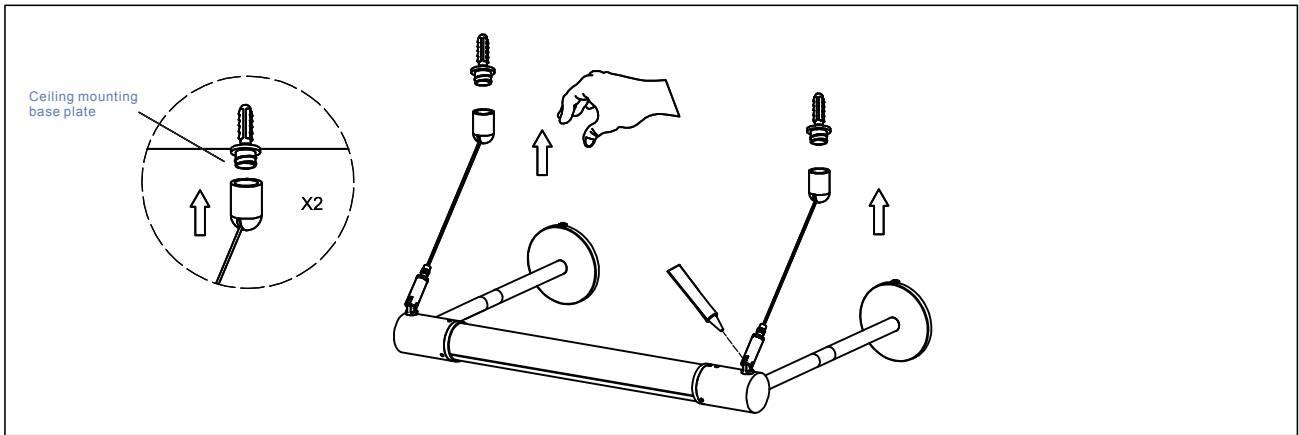


E) Install the ceiling mounting base plate on the wall, then screw the bullet heads into the ceiling mounting base plates.

■ Fixture Rotation


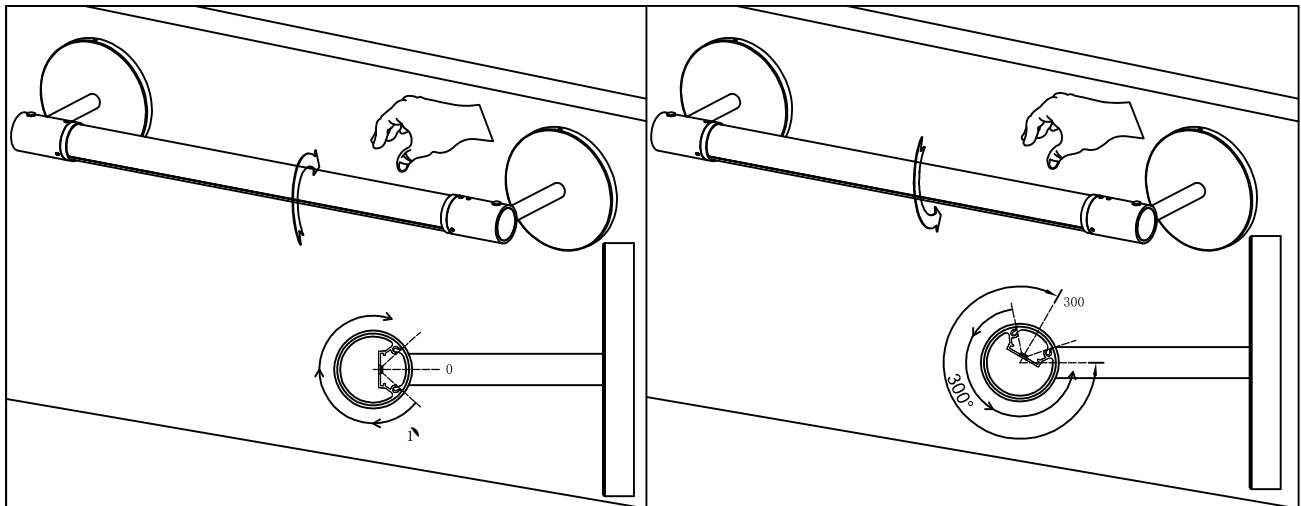


After mounting the lighting fixture on the wall, rotate according to the direction above exactly.


FIXTURE CONNECTION

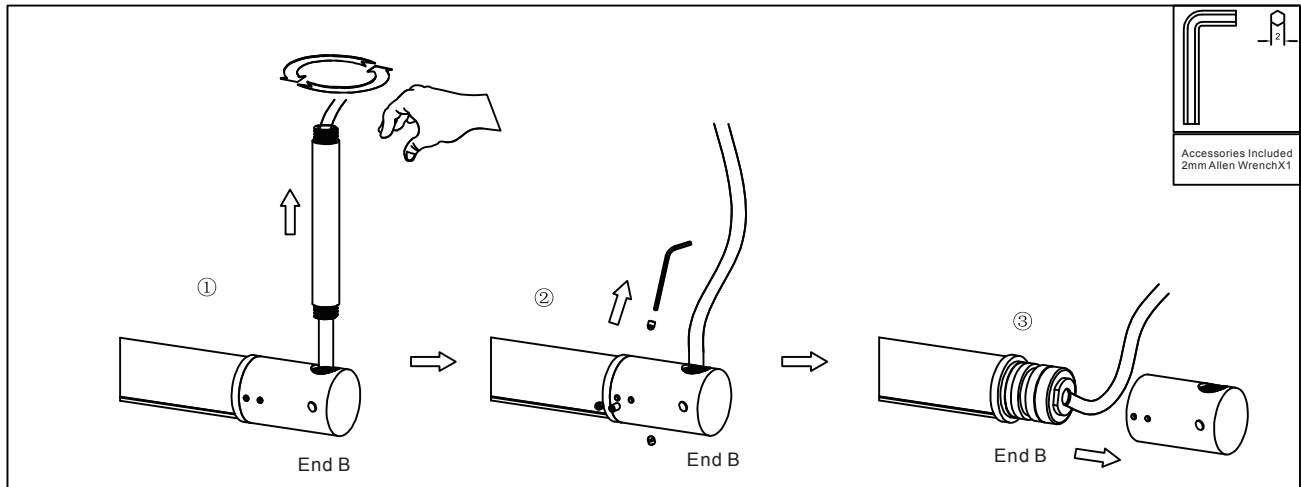


A) Remove the rod from the End B of one fixture, then use the provided tool to remove the screws, finally remove the end cap.

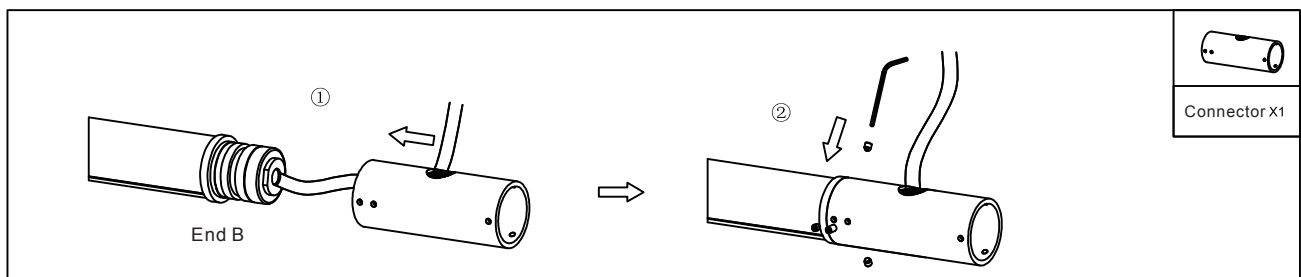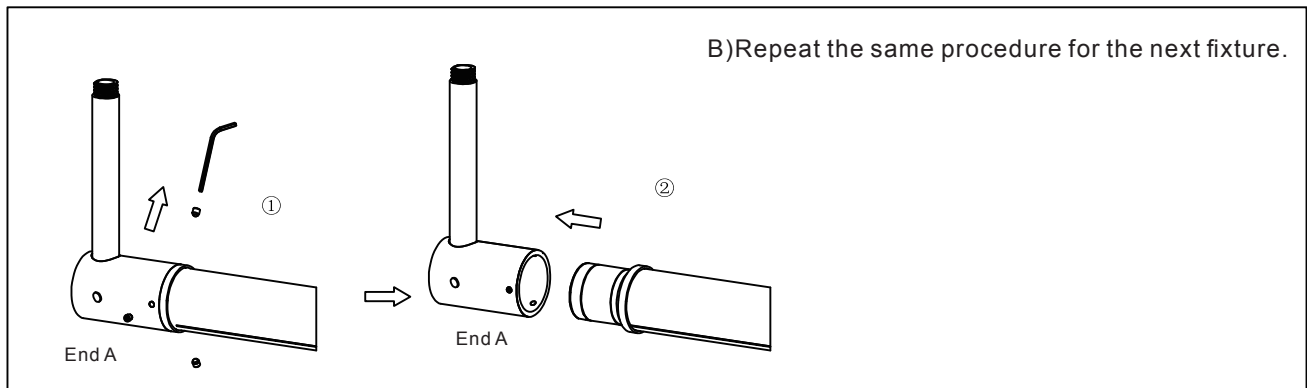

C) Pass the power cord through the hole in the middle of the connector, then connect the fixture to the connector, and tighten the set screw in place with the tool.

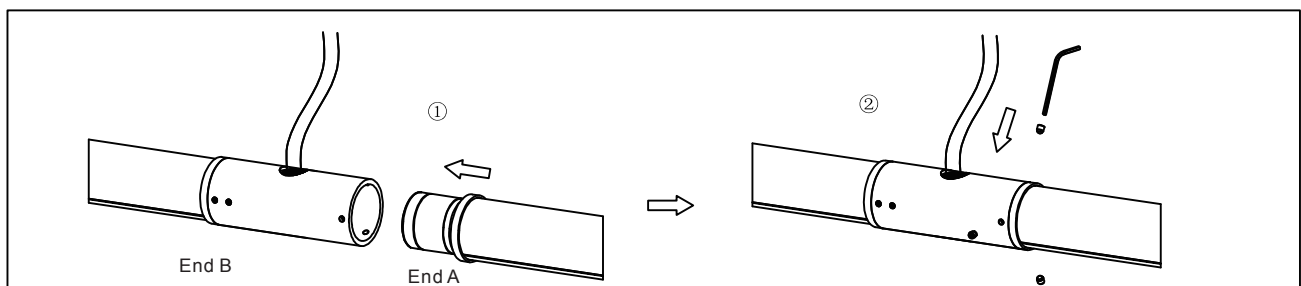

FIXTURE CONNECTION

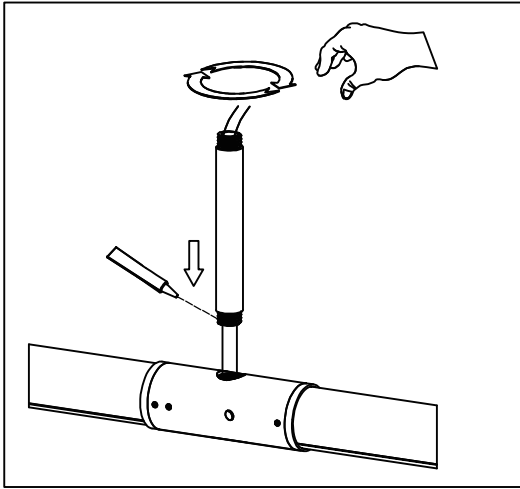

E) Secure the rod to the fixture, then apply the appropriate amount of waterproof sealant, then secure the rod to the canopy.

