

## General Safety Information

### READ AND FOLLOW ALL SAFETY INSTRUCTIONS

### DANGER – RISK OF SHOCK – DISCONNECT POWER BEFORE INSTALLATION

**WARNING** – Risk of fire: Use only in place of fluorescent lamps specified on the label.

**WARNING** – Risk of Fire: If the lamp or luminaire exhibits undesirable operation (buzzing, flickering, etc.), immediately turn off power, remove lamp from luminaire and contact manufacturer.

**WARNING** – Risk of Fire: Do not install this lamp in a preheat luminaire.

This lamp only operates on electronic ballasts. If lamp does not light when the luminaire is energized, remove from luminaire and contact lamp manufacturer or qualified electrician.

Any modifications to this product will void the warranty.

Direct replacement for 13W/18W/26W/32W/42W G24q/GX24q CFL lamps only.

Operates on electronic ballasts only.

Suitable for damp locations.

Suitable for use in totally enclosed recessed fixtures.


This device is not intended for use with the emergency exits or for emergency lighting.



Picture is for illustration purposes only. Your model may vary.


## Installation Instructions

1. Use the slide switch on the lamp to set different color temperatures: 3000K / 3500K / 4000K (See **Figure 1**)
2. Check all the items of the retrofit kit.
3. Check if the LED lamp rating parameters correlate with this luminaire.
4. Make sure circuit breaker that supplies power to the fixture is turned off.
5. Remove the diffuser, lens cover or louver (if provided) and the existing fluorescent lamp(s) from the fixture.
6. Check if the ballast installed in the fixture is listed in the ballast compatibility chart. If not, do not assemble this retrofit kit.
7. Install the new LED lamp(s) into the lamp holder. Gently rotate lamps into the desired position.
8. Make sure that the pins are completely seated in the lamp holder.
9. Replace the diffuser, lens cover or louver (if removed in step 5). Turn power back on at the breaker box and turn on lights.



**Fig. 1**

### RETROFIT WITH 1 LAMP

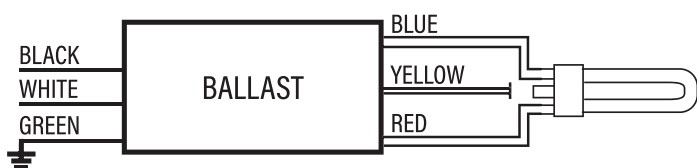

### RETROFIT WITH 2 LAMPS

