



AURA Series



Regressed Gimbals



Date		Project	
Type		Part Number	

ARCHITECTURAL LUMINAIRES BY 

The RENO Lighting's LED Round Gimbal High Output downlight combines a sleek design with a small aperture without any compromise to the light output. With up to 900 lumens and a CRI of 90, this small downlight provides an outstanding performance that will suit both residential and commercial applications.

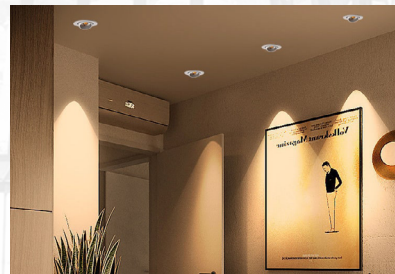

Product Features

- JA8 Compliant
- Energystar Certified
- IC-Rated and Air-Tight ready and may be in direct contact with insulation
- May be installed in dry wall or suspended ceilings
- Flicker-free 120V forward phase TRIAC Dimming (down to 5%)
- Operating temperature: -4°F to 113°F (-20°C to 45°C)
- Rated Lifetime L70 >50,000 hrs
- 5 year warranty

Key Specifications

Voltage	120V
Wattage	12W
Efficacy	75 lm/W
CCT	2700K, 3000K, 3500K, 4000K, 5000K
CRI	90
Lumens	900 lm
Beam Angle	38°
Dimming	TRIAC 120V
Finish	White or Black
Mounting	Regressed
Applications	Residential, Commercial, Hotel






AURA Series | Regressed Gimbals

ARCHITECTURAL LUMINAIRES BY  RENO[®]
LIGHTING


Specifications

Order#	Model	Size	Wattage	Voltage	Lumens	CCT
R36121	RENO-LED-AURA-35-S12W-FG-5CCT-WH	3.5"	12W	120VV	900 lm	27/30/35/40/5000K
R36122	RENO-LED-AURA-35-S12W-FG-5CCT-BK	3.5"	12W	120VV	900 lm	27/30/35/40/5000K
R36123	RENO-LED-AURA-4-S12W-FG-5CCT-WH	4.0"	12W	120VV	900 lm	27/30/35/40/5000K
R36124	RENO-LED-AURA-4-S12W-FG-5CCT-BK	4.0"	12W	120VV	900 lm	27/30/35/40/5000K

Accessories



R39107



R39108

Order#	Model	Description
R39107	RENO-MC-123	Multiple Head Universal Pre-Mounting New Construction Plate for 3.5" LED Combo Series
R39108	RENO-MP4	Mounting Plate without clip





AURA Series | Regressed Gimbals

ARCHITECTURAL LUMINAIRES BY  **RENO**
LIGHTING

Dimensions

