

Date		Project	
Type		Part Number	




ALL-IN-ONE PERFORMANCE LIGHTING

STANDALONE Sensors

Photocell Sensor

This high-precision sensor automatically adjusts lighting levels based on ambient brightness, ensuring optimal illumination while reducing energy consumption. The plug-and-play 3.5mm jack allows for quick and easy installation with compatible LED fixtures. Ideal for commercial and warehouse lighting applications, this sensor provides seamless daylight harvesting and automated dimming, making it a must-have for lighting solutions.

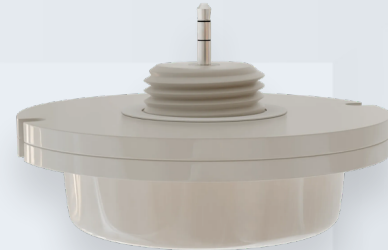

PRODUCT FEATURES

- UL Certified (UL773A)
- IP65 Wet Location Rated
- Provides automatic dusk-to-dawn operation
- Plug and play installation with a 3.5mm Jack
- Operation temperature: -40°F to 158°F (-40°C to 70°C)
- 5 year warranty

KEY SPECIFICATIONS

Input Voltage	12VDC
Installation	3.5mm Jack
Applications	Commercial, Warehouse, Retail Facilities



SPECIFICATIONS

Order#	Model	Rated Frequency	Input Voltage
R72001	RENO-SENSOR-PC-S	50mA+5%	12VDC

DIMENSIONS

