



4FT ROUNDED ARCHITECTURAL LINEAR STRIP INSTALLATION GUIDE

OVERVIEW

TOOLS REQUIRED (NOT INCLUDED)

- Wiring supplies as per national and local electrical codes
- Hardware/tools required to mount to structure (field provided)

INSTRUCTIONS FOR THE FOLLOWING FIXTURES

Order	Model
R33411	RENO-RALS4-DV-MW-MCCT-WH
R33412	RENO-RALS4-DV-MW-MCCT-BK

IMPORTANT


- To avoid the risk of fire, or electric shock this product should be installed, inspected, and maintained by a qualified electrician only. Installation should be completely by an individual familiar with the construction and operation of the luminaire. Installation of luminaire must be in accordance with national and local building and electrical codes.

NOTES

- Instructions do not cover all details and all possible product configurations.
- Do not restrict luminaire ventilation.
- Ensure LED luminaire is not covered with material that will prevent convection or conduction cooling.
- Ensure LED luminaire has the correct polarity before installation
- Avoid exposing wiring to metal edges and sharp objects.

WARNING & SAFETY


- To avoid electric shock: Be certain electrical power is OFF before and during installation and maintenance. Luminaire must be supplied by a wiring system with an equipment grounding conductor.
- To avoid burning hands: Make sure lens and housing are cool when performing maintenance.
- To avoid product degradation: Make sure the wire supply voltage is the same as the luminaire supply. Use proper supply wiring as specified on the luminaire nameplate. Avoid use in environments containing sulfur, chlorine, or other halides, methyl acetate or ethyl acetate, cyanoacrylates, glycol ethers, formaldehyde or butadiene.



FOR ADDITIONAL INFORMATION REQUIRED NOT COVERED IN THIS DOCUMENT PLEASE CONTACT A LOCAL REPRESENTATIVE!

- Maintenance: Perform visual, electrical, and mechanical inspections on a regular basis. The environment and frequency of use should determine this. However, it is recommended that checks be made at least once a year. Electrically check to make sure that all connections are clean and tight. Mechanically check that all parts are properly assembled.

DIMENSION

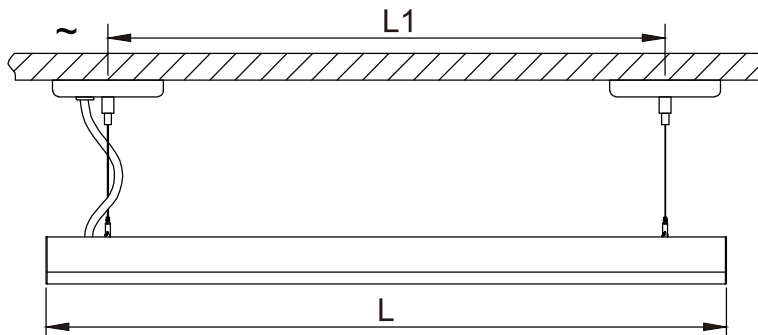


4ft	
L	47.17" 198mm
L1	43.46" 104mm


4FT ROUNDED ARCHITECTURAL LINEAR STRIP | INSTALLATION GUIDE

INSTALLATION INSTRUCTIONS


■ Surface mounted

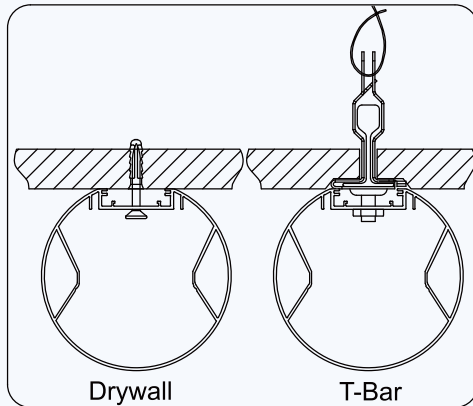


■ Dip switch for CCT& Wattage Selectable Switch

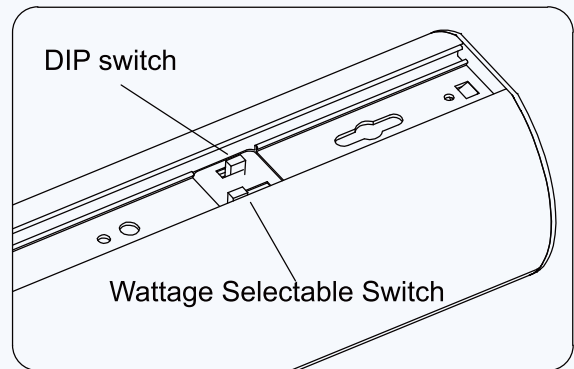

■ Wiring Diagram

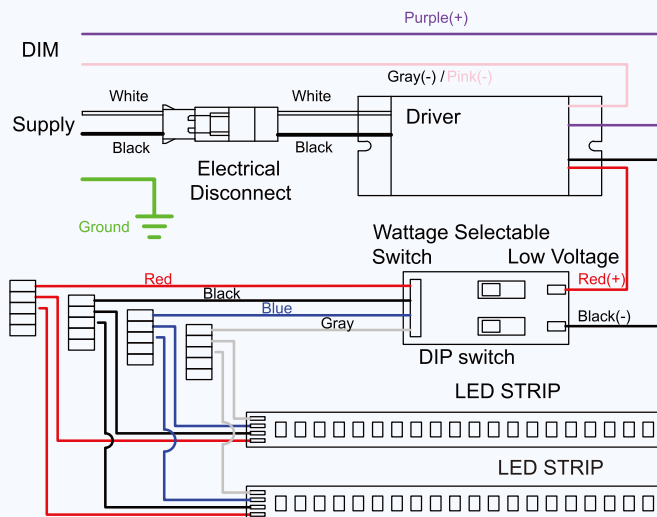


■ SUSPENDED MOUNT

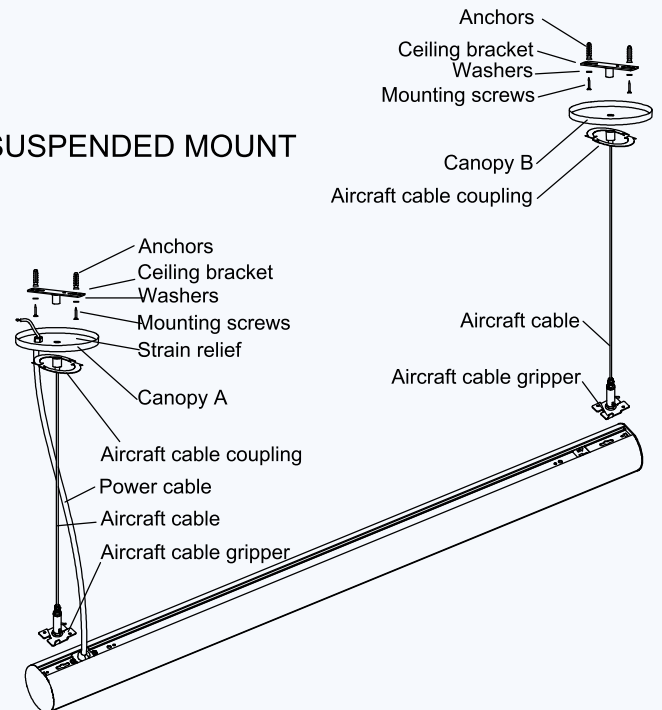


4FT ROUNDED ARCHITECTURAL LINEAR STRIP | INSTALLATION GUIDE

INSTALLATION INSTRUCTIONS


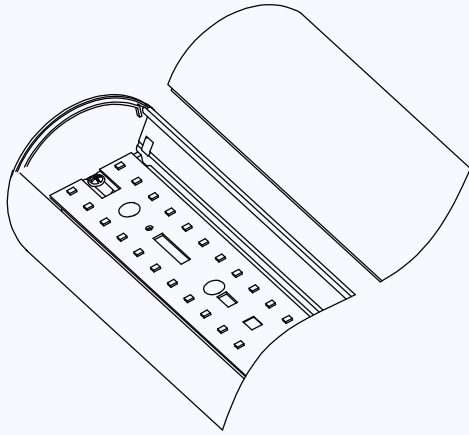


Step 1 : Remove the lens.

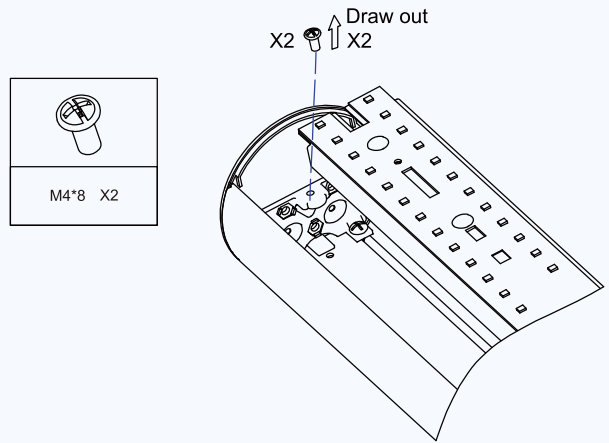


Step 2 : Unscrew the screws and remove the reflector

SURFACE MOUNT

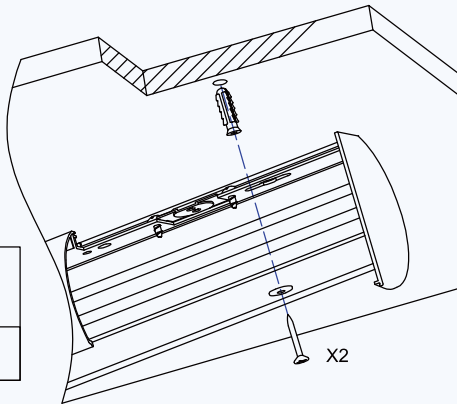


Step 1 : Find the appropriate position on the ceiling, place the washer and then secure the fixture with screws.

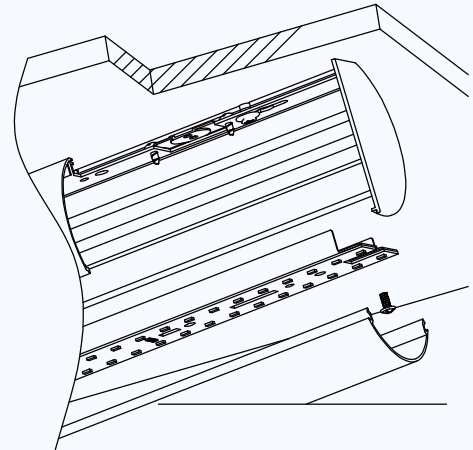


Step 2: Final

CORNER CONNECTION

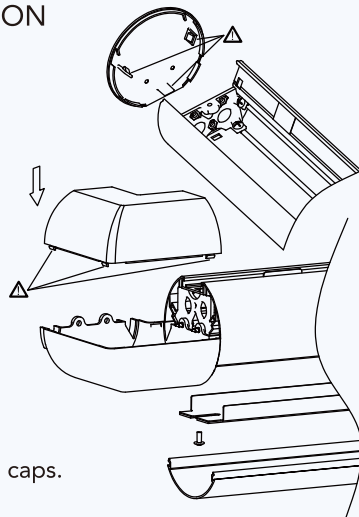

Step 1 : Remove the end caps.

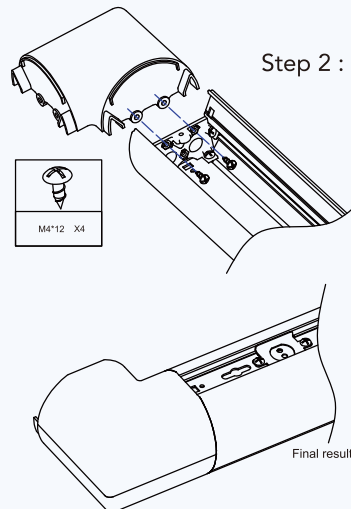


Step 2 : Secure the corner with screws

4FT ROUNDED ARCHITECTURAL LINEAR STRIP | INSTALLATION GUIDE



INSTALLATION INSTRUCTIONS

SUSPENDED MOUNT (UP & DOWN LIGHTING VERSION)

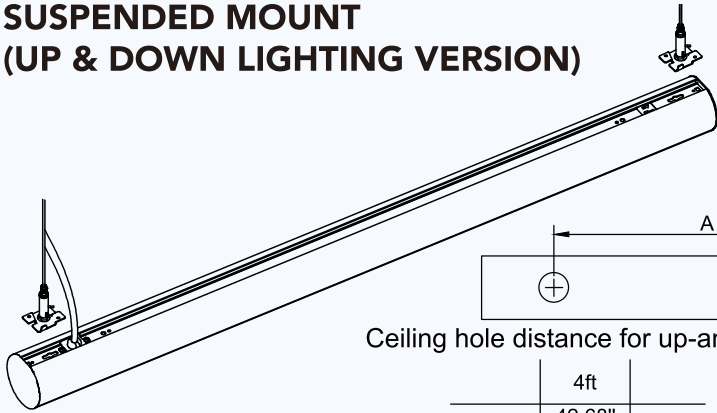


Ceiling hole distance for up-and-down version


	4ft
A	42.68" 1084mm

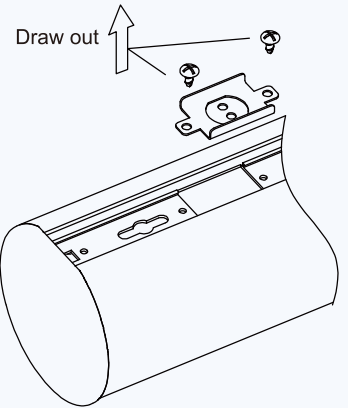


Step 1 : Remove the wiring bracket.

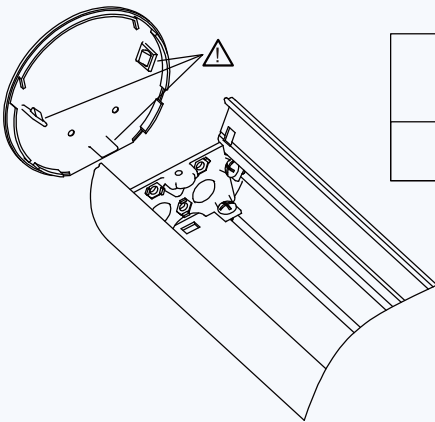

Step 2 : Remove the end cap.

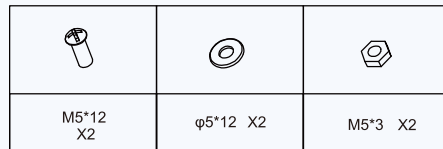

Step 3 : Install the screws.

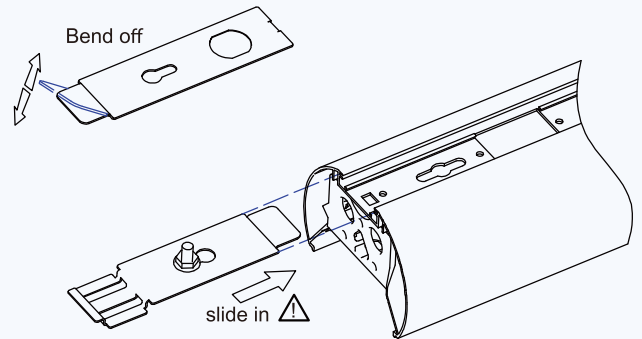


Step 4 : Insert the suspension clip into the fixture as shown in the diagram.

INSTALLATION INSTRUCTIONS

SUSPENDED MOUNT (UP & DOWN LIGHTING VERSION)

Step 5 : Insert the wire-free module end into the fixture.

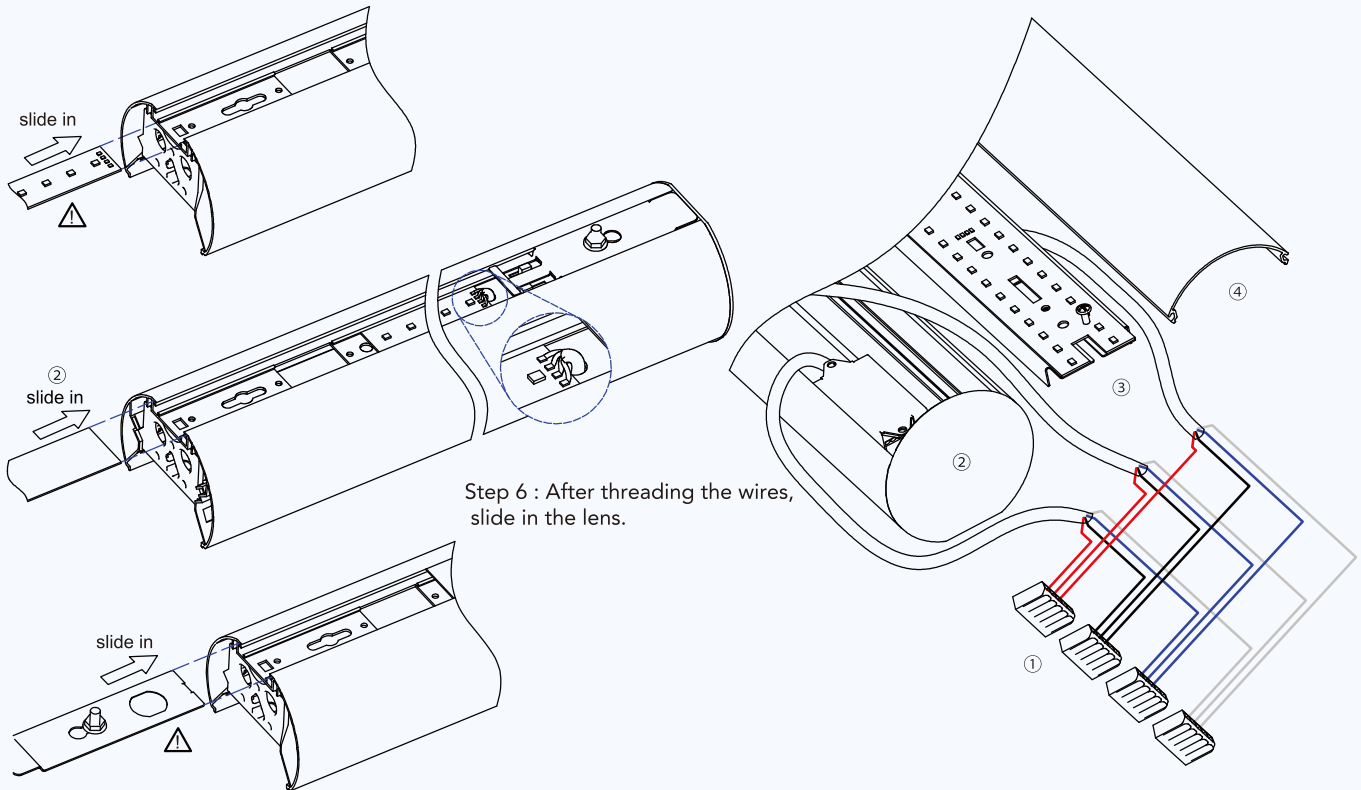


Step 7 : Slide in the suspension clip on the other end in the specified direction.

Step 8 : Connect the wiring, install the end cap, mount the module installation plate, and attach the lens.

4FT ROUNDED ARCHITECTURAL LINEAR STRIP | INSTALLATION GUIDE





INSTALLATION INSTRUCTIONS

SUSPENDED MOUNT (DOWN LIGHTING VERSION)

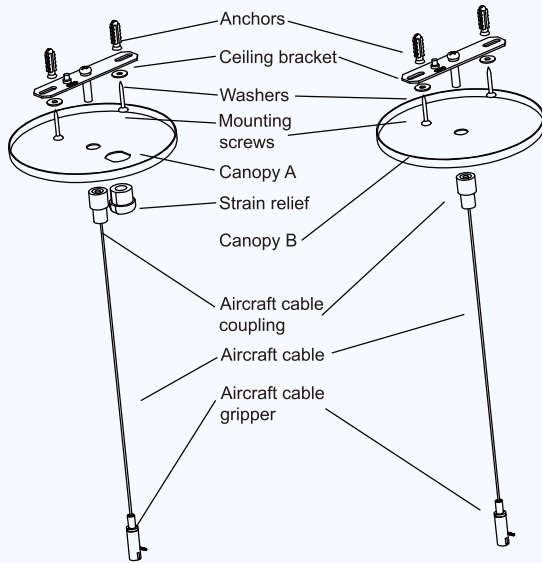




		
M5*12 X2	φ5*12 X2	M5*3 X2

Step 1 : Install the ceiling bracket and connect the ground wire.




Step 2 : Use the strain relief to secure the wire and make the wiring connections, then install the canopy.

Step 3 : Install the suspension screws as shown in the diagram.

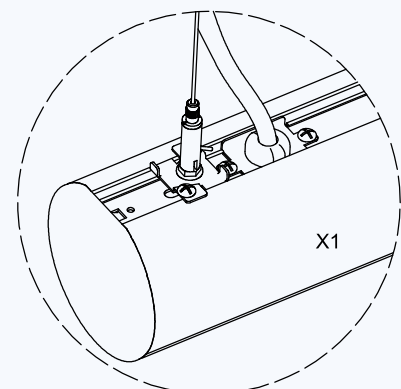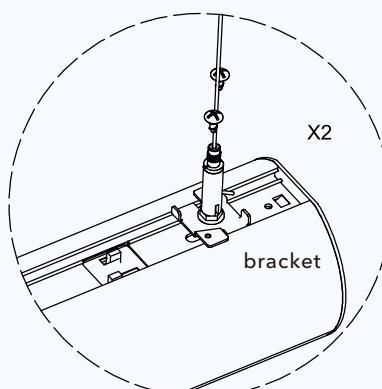
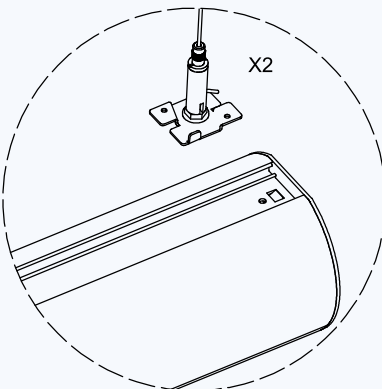


Step4: Rotate the bracket 90° and fasten it to the fixture using screws, the installation is complete.



ROW-MOUNTING INSTRUCTIONS

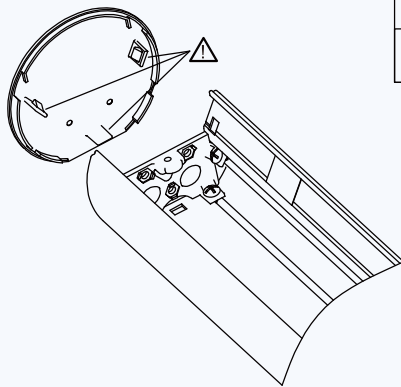


Step 1 : Remove the end cap.





Step 2 : After attaching the connector to the back of one end of the light, flip it to the front.

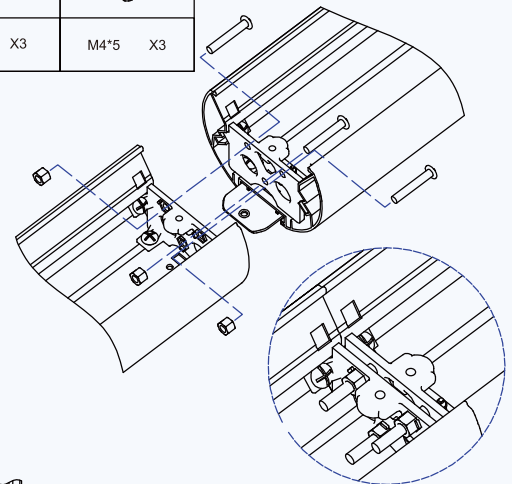


Step 3 : Install the connector screws

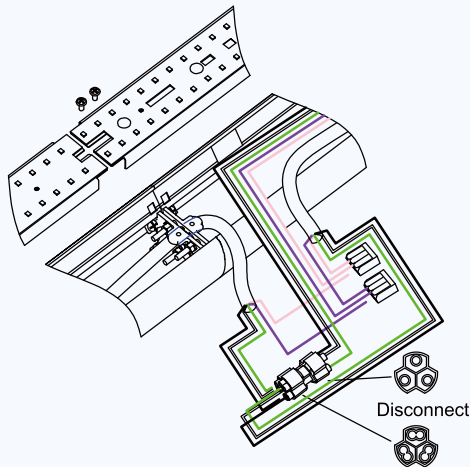

Step 4 : Connect the wiring and install the module mounting plate.





Step 5 : Install the connector screws on the back side.

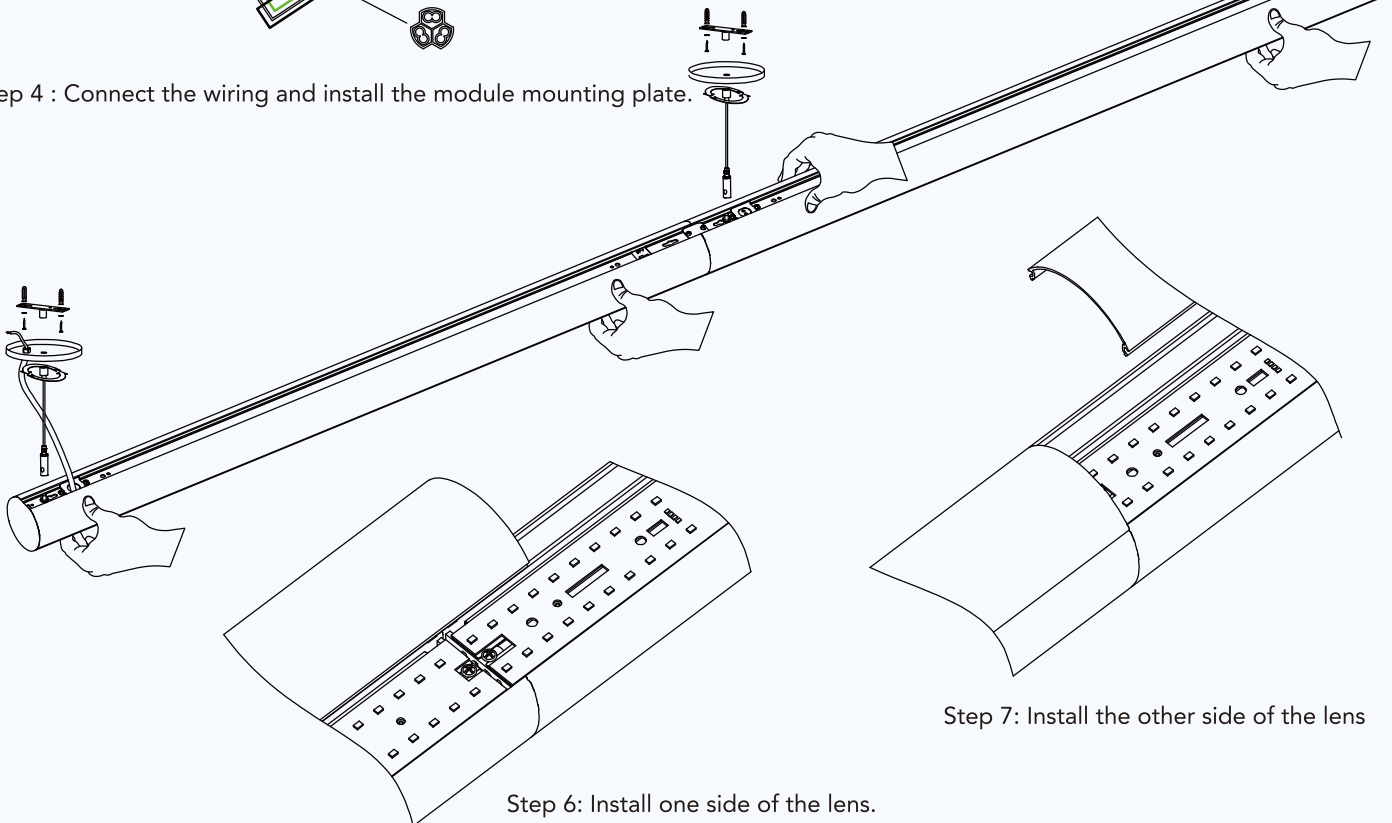


4FT ROUNDED ARCHITECTURAL LINEAR STRIP | INSTALLATION GUIDE

WALL MOUNT

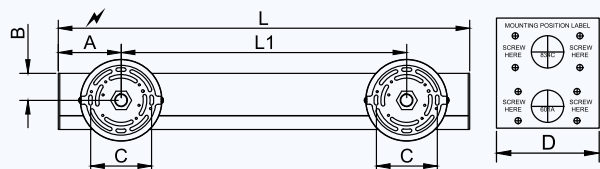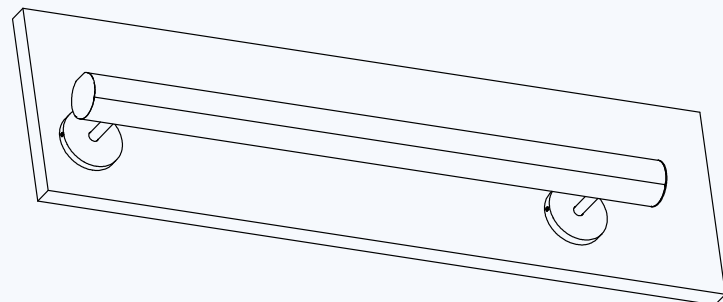


	2ft	4ft	8ft
L	23.74" 603mm	47.17" 1198mm	94.02" 2388mm
L1	16.50" 419mm	39.92" 1,014mm	86.77" 2,204mm
A		3.62" 92mm	
B		1.56" 39.5mm	
C		3.50" 89mm	
D		2.76" 70mm	

Step 2 : Secure the rod with a nut onto the bracket."

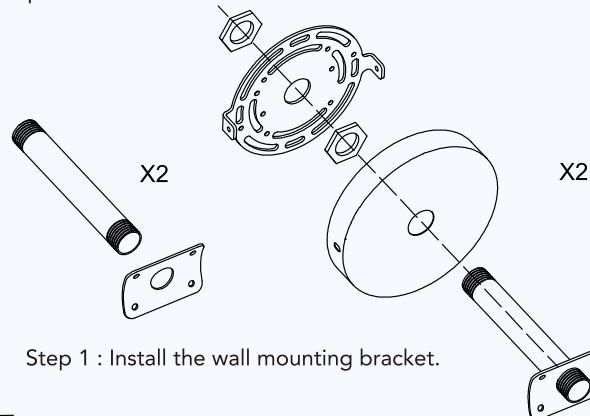


Step 1 : Install the wall mounting bracket.

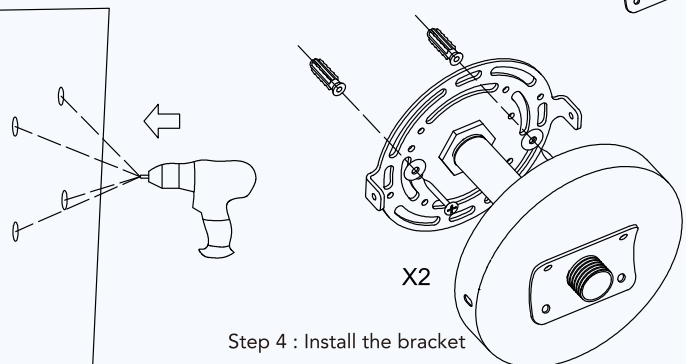


Step 4 : Install the bracket

Step 3 : Drill holes in the ceiling.



M4*25 X4	φ4*12 X4	X4

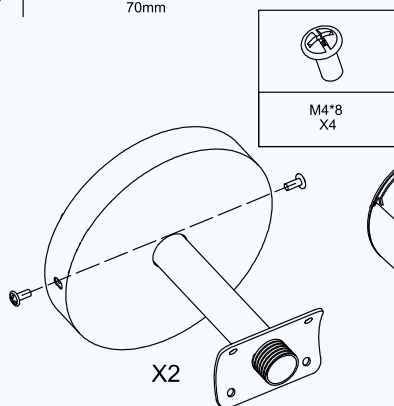


Step 5 : Install the canopy




Step 6: Remove the lens and unscrew the screws and remove the reflector.

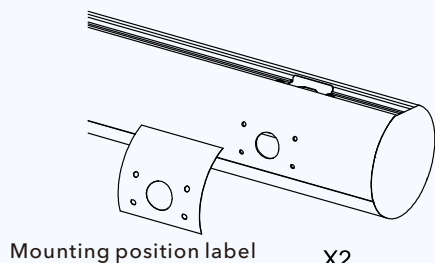

Mounting position label X2

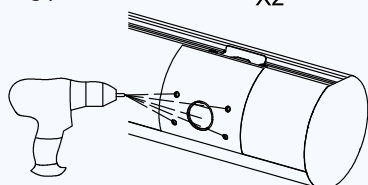

Step 7: Stick the mounting position label onto the fixture body, then drill the holes according to the marked positions.

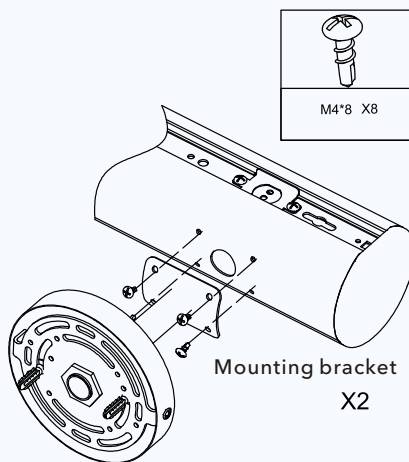

Mounting bracket X2

Step 8: Secure the fixture with mounting bracket. Step 9: Complete the wiring connections.

