


Date		Project	
Type		Part Number	

PRIME R ALL-IN-ONE PERFORMANCE LIGHTING

TYPE C T8

Type C T8 Tubes

Experience the next level of energy-efficient lighting with T8 Type C LED lamps — a superior alternative to traditional fluorescent tubes. Featuring a remote driver system, this LED solution ensures optimal performance, longer lifespan, and reduced maintenance costs. Ideal for offices, schools, hospitals, and commercial spaces, it delivers consistent, flicker-free illumination with enhanced energy savings.

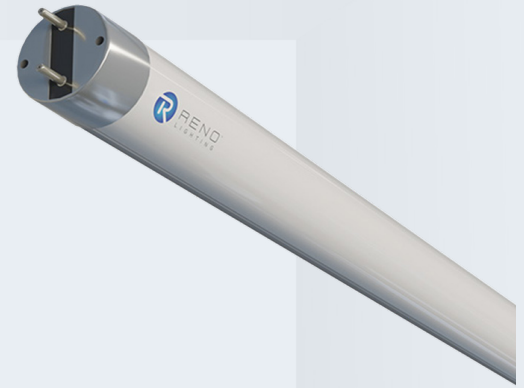

PRODUCT FEATURES

- NSF Listed: NSF/ANSI Standard 2 - Food Equipment
- Suitable for use in dry and damp locations
- Direct plug-in & Safe Installation
- Rated for use in fully enclosed fixtures
- No UV or IR radiation
- Compatible with any Type C driver and **RENO's DALI Driver**
- Dimming based on Driver parameters
- Operating temperature: -4°F to +113°F (-20°C to +45°C)
- Rated Lifetime L70(hrs): >100,000
- 10 year limited warranty

KEY SPECIFICATIONS

Voltage	BF
Lamp Base	G13 (Medium Bi-Pin)
Wattage	15W
Length	4FT
Efficacy	Up to 147 lm/W
Lumens	Up to 2,200lm
CCT	3000K or 3500K or 4000K or 5000K or 6500K
CRI	>83
Beam Angle	320°
Certifications	UL, NSF, DLC
Applications	Commercial, Residential, Office, Food Service Facilities

SPECIFICATIONS

Order#	Model	Size	Wattage	Voltage	CCT	Lumens	CRI	Beam Angle
R41205	WLL-LEDT8EX15/830	4.0 ft	15W	BF	3000K	2200 lm	>83	320°
R41206	WLL-LEDT8EX15/835	4.0 ft	15W	BF	3500K	2200 lm	>83	320°
R41207	WLL-LEDT8EX15/840	4.0 ft	15W	BF	4000K	2200 lm	>83	320°
R41208	WLL-LEDT8EX15/850	4.0 ft	15W	BF	5000K	2200 lm	>83	320°
R41209	WLL-LEDT8EX15/865	4.0 ft	15W	BF	6500K	2200 lm	>83	320°

DLC CERTIFICATION

Order#	Model	Application	DLC Standard	DLC Premium
R41205	WLL-LEDT8EX15/830	1-lamp External Driver (UL Type C) Lamps	S-QBM7DJ	–
		2-lamp External Driver (UL Type C) Lamps	S-N65WHG	–
		3-lamp External Driver (UL Type C) Lamps	S-6KGKCL	–
		4-lamp External Driver (UL Type C) Lamps	S-WHFSCD	–
R41206	WLL-LEDT8EX15/835	1-lamp External Driver (UL Type C) Lamps	S-46B259	–
		2-lamp External Driver (UL Type C) Lamps	S-T3HDBD	–
		3-lamp External Driver (UL Type C) Lamps	S-C916X6	–
		4-lamp External Driver (UL Type C) Lamps	S-N33GWF	–
R41207	WLL-LEDT8EX15/840	1-lamp External Driver (UL Type C) Lamps	S-92ZT1V	–
		2-lamp External Driver (UL Type C) Lamps	S-D5GY2V	–
		3-lamp External Driver (UL Type C) Lamps	S-WTGRRZ	–
		4-lamp External Driver (UL Type C) Lamps	S-5F3VNN	–
R41208	WLL-LEDT8EX15/850	1-lamp External Driver (UL Type C) Lamps	S-XQFQDN	–
		2-lamp External Driver (UL Type C) Lamps	S-BGGM60	–
		3-lamp External Driver (UL Type C) Lamps	S-QZ2WWN	–
		4-lamp External Driver (UL Type C) Lamps	S-0CR11R	–
R41209	WLL-LEDT8EX15/865	1-lamp External Driver (UL Type C) Lamps	S-VW8XKG	–
		2-lamp External Driver (UL Type C) Lamps	S-XL2XRQ	–
		3-lamp External Driver (UL Type C) Lamps	S-G5VJ9J	–
		4-lamp External Driver (UL Type C) Lamps	S-ZSCX7G	–

ACCESSORIES – MOUNTING



R83101
LED ISO adjustable power driver

Order#	Model	Description
R83101	RENO-DA54B-DV-PS	LED ISO adjustable power driver

DIMENSIONS

