

Date		Project	
Type		Part Number	



 THE EVERYDAY COMPETITIVE OPTION

# MAKO Series

## Vapor Tight Fixture



Reno Lighting's ECO Vapor Tight is housed in polycarbonate silicon perimeter gasket with brackets for mounting. Engineered for powerful lighting. The Reno linear vapor tight has an IP66 protection grade and is DLC and UL certified, making it a great lighting solution for your industrial application.

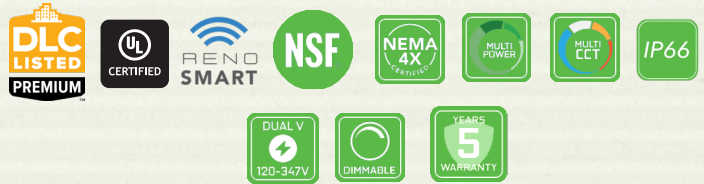

### PRODUCT FEATURES

- NSF Compliant
- NEMA 4X Certified: Ensures the fixture is water-tight and can withstand extreme conditions
- Protection Grade IP66
- Surface & Suspended Mounting options via supplied clamps inside the fixture body
- One-piece polycarbonate housing body and frosted polycarbonate lens
- Operating temperature: -40°F to +122°F (-40°C to +50°C)
- Rated Lifespan: L70 ~100,000 hrs
- 5 year warranty

### KEY SPECIFICATIONS

<b>Voltage</b>	120-347V
<b>Wattage</b>	Selectable Wattage: 2ft - 20/25/35W 4ft R1 - 25/35/45W 4ft R2 - 50/60/66W
<b>Power Factor</b>	>0.9
<b>CCT</b>	Selectable: 35/40/5000K
<b>CRI</b>	>80
<b>Lumens</b>	Up to 8,643 lm
<b>Beam Angle</b>	120°
<b>Dimming</b>	0-10V
<b>Mounting</b>	Surface & Suspension
<b>Applications</b>	Commercial, Industrial, Warehouse


 STANDALONE  
 SENSOR OPTIONS

 EMERGENCY  
 BACKUP READY

 RENO SMART  
 NLC SYSTEM


## SPECIFICATIONS - 2FT 20/25/35W

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R33118	RENO-LVP2-DV-MW-MCCT-ECO	20W	120-347V	2,576 lm	128 lm/W	3500K
				2,841 lm	142 lm/W	4000K
				2,724 lm	136 lm/W	5000K
		25W	120-347V	3,283 lm	129 lm/W	3500K
				3,381 lm	135 lm/W	4000K
				3,252 lm	130 lm/W	5000K
		35W	120-347V	3,736 lm	106 lm/W	3500K
				3,950 lm	112 lm/W	4000K
				3,978 lm	113 lm/W	5000K

## SPECIFICATIONS - 4FT R1 25/35/45W

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R33116	RENO-LVP4-DV-MW-MCCT-R1-ECO	25W	120-347V	3,348 lm	133 lm/W	3500K
				3,478 lm	139 lm/W	4000K
				3,420 lm	136 lm/W	5000K
		35W	120-347V	4,577 lm	130 lm/W	3500K
				4,523 lm	129 lm/W	4000K
				4,434 lm	126 lm/W	5000K
		45W	120-347V	6,065 lm	134 lm/W	3500K
				6,062 lm	134 lm/W	4000K
				6,253 lm	138 lm/W	5000K


## SPECIFICATIONS - 4FT R2 50/60/66W

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R33117	RENO-LVP4-DV-MW-MCCT-R2-ECO	50W	120-347V	7,020 lm	140 lm/W	3500K
				7,201 lm	144 lm/W	4000K
				7,159 lm	143 lm/W	5000K
		60W	120-347V	7,768 lm	129 lm/W	3500K
				7,736 lm	129 lm/W	4000K
				7,886 lm	131 lm/W	5000K
		66W	120-347V	8,643 lm	130 lm/W	3500K
				8,422 lm	127 lm/W	4000K
				8,577 lm	129 lm/W	5000K

## DLC CERTIFICATION

Order#	Model	Application	DLC Standard	DLC Premium
R33118	RENO-LVP2-DV-MW-MCCT-ECO	Direct Linear Ambient Luminaires	S-3AJTLB	-
		Stairwell and Passageway	-	S-EFTHP8
R33116	RENO-LVP4-DV-MW-MCCT-R1-ECO	Direct Linear Ambient Luminaires	S-NTQFVG	-
		Low-Bay Luminaires	S-PZSE48	-
R33117	RENO-LVP4-DV-MW-MCCT-R2-ECO	Stairwell and Passageway	-	S-62Q4UF
		Direct Linear Ambient Luminaires	S-IQBA3Y	-
		Low-Bay Luminaires	S-ION7HX	-
		Stairwell and Passageway	-	S-2L45AZ


## ACCESSORIES – MOUNTING



R39204  
RENO-RP  
Suspension Kit

Order#	Model	Description
R39204	RENO-RP	Suspension Kit

## ACCESSORIES – EMERGENCY BACKUP

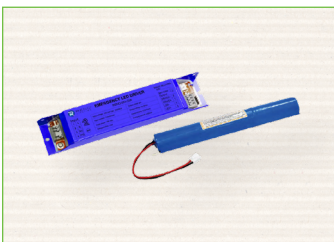


R83004  
RENO-EM-C08  
Emergency LED Driver (100-347V AC, 50-60Hz, 8W)

Order#	Model	Description
R83004	RENO-EM-C08	Internal Mount Emergency Driver (100-347V AC, 50-60Hz, 8W)


## ACCESSORIES – STANDALONE SENSORS



R74002  
RENO-SENSOR-PIR-H-EX  
PIR Sensor



R75103  
RENO-RS-JK-AD-CORD-L  
Hardwire Adjustable "L"  
Angle Adaptor for 3.5mm Jack




R71002  
RENO-SENSOR-MH-W  
Microwave Sensor



R74004  
RENO-SENSOR-PIR3.5-PH15M  
Long Detection Range PIR  
Sensor



R73002  
RENO-REMOTE-H  
Remote Control for Standalone  
Sensors (With Screen)

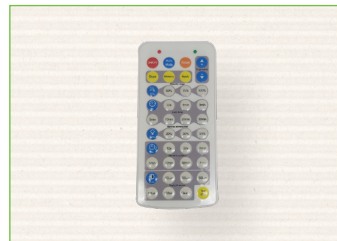

R73005  
RENO-REMOTE-H-ECO  
Remote Control for Standalone  
sensors (Without Screen)

Order#	Model	Description
R74002	RENO-SENSOR-PIR-H-EX	PIR Sensor
R75103	RENO-RS-JK-AD-CORD-L	Hardwire Adjustable "L" Angle Adaptor for 3.5mm Jack Sensors
R71002	RENO-SENSOR-MH-W	Microwave Sensor
R74004	RENO-SENSOR-PIR3.5-PH15M	Long Detection Range PIR Sensor
R73002	RENO-REMOTE-H	Remote Control for Standalone Sensors (With Screen) Note: Only 1 needed per project
R73005	RENO-REMOTE-H-ECO	Remote Control for Standalone sensors (Without Screen) Note: Only 1 needed per project


## ACCESSORIES – RENO SMART NLC SYSTEM



R75001  
RENO-RS-JK-BPDN-12V  
Bluetooth PIR sensor



R75002  
RENO-RS-JK-BMWM-12V  
Bluetooth microwave sensor

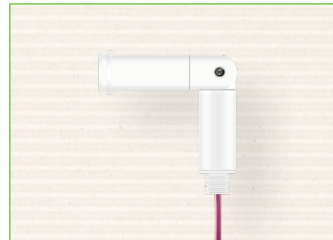


R75103  
RENO-RS-JK-AD-CORD-L  
Hardwire Adjustable "L"  
Angle Adaptor for 3.5mm Jack



R75201  
RENO-RS-GW-BCNW  
Bluetooth Ceiling mounted  
gateway



R75301  
RENO-RS-RC-BNNN  
Bluetooth Reset remote  
controller





R75302  
RENO-RS-RC-BNNG  
Bluetooth 7-Key Smart Wall  
Switch



Order#	Model	Description
R75001	RENO-RS-JK-BPDN-12V	Bluetooth PIR sensor
R75002	RENO-RS-JK-BMWM-12V	Bluetooth microwave sensor
R75103	RENO-RS-JK-AD-CORD-L	Hardwire Adjustable "L" Angle Adaptor for 3.5mm Jack Sensors
R75201	RENO-RS-GW-BCNW	Bluetooth Ceiling mounted gateway
R75301	RENO-RS-RC-BNNN	Bluetooth Reset remote controller
R75302	RENO-RS-RC-BNNG	Bluetooth 7-Key Smart Wall Switch

**\*\*All Reno Smart Sensors are programmed/commissioned using our Reno Smart App**


### PHOTOMETRICS - 2FT 35W/4K

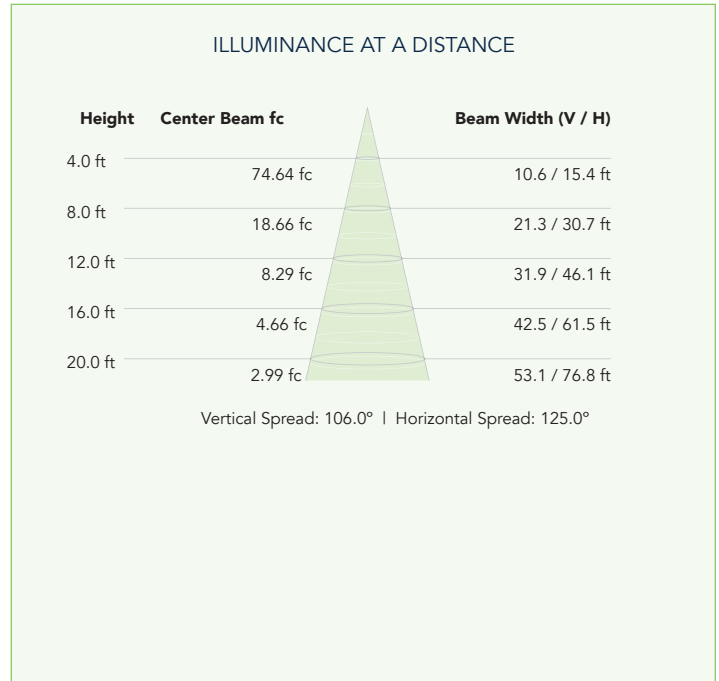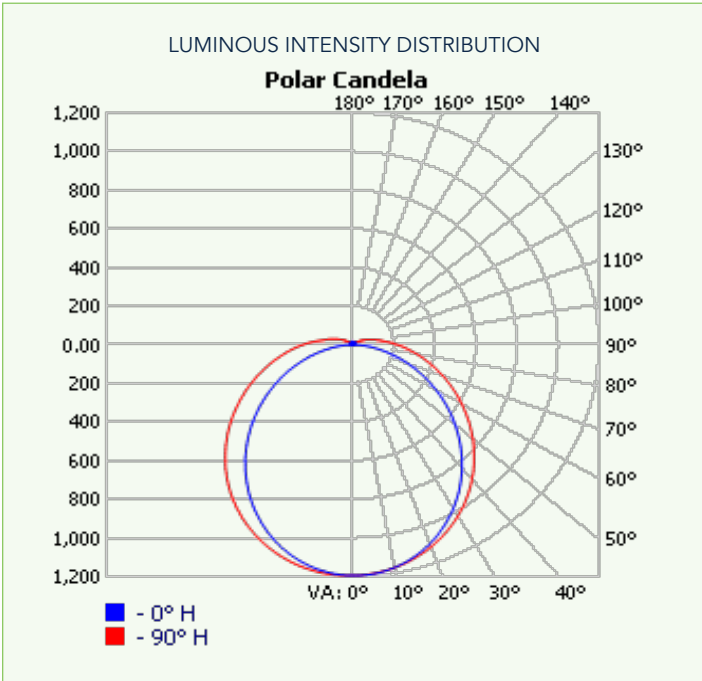

### PHOTOMETRICS - 4FT R1 45W/4K

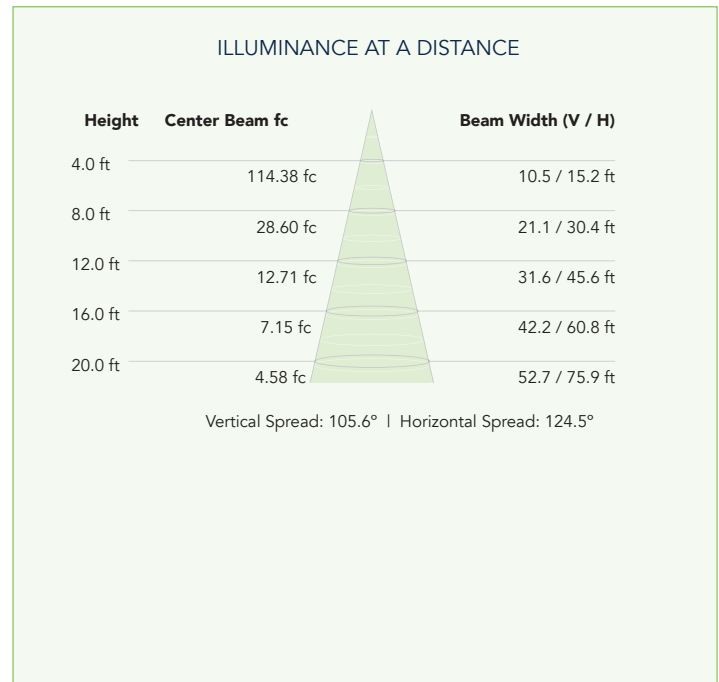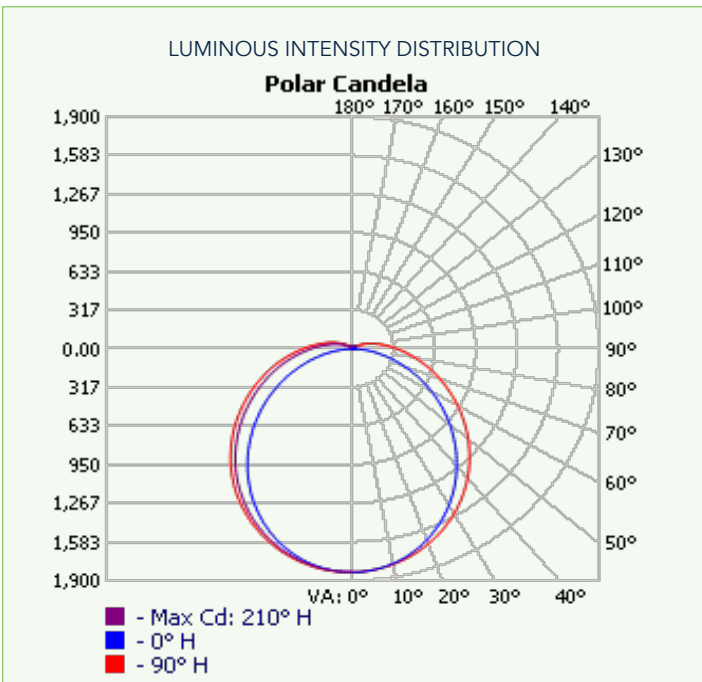

## PHOTOMETRICS - 4FT R2 66W/4K

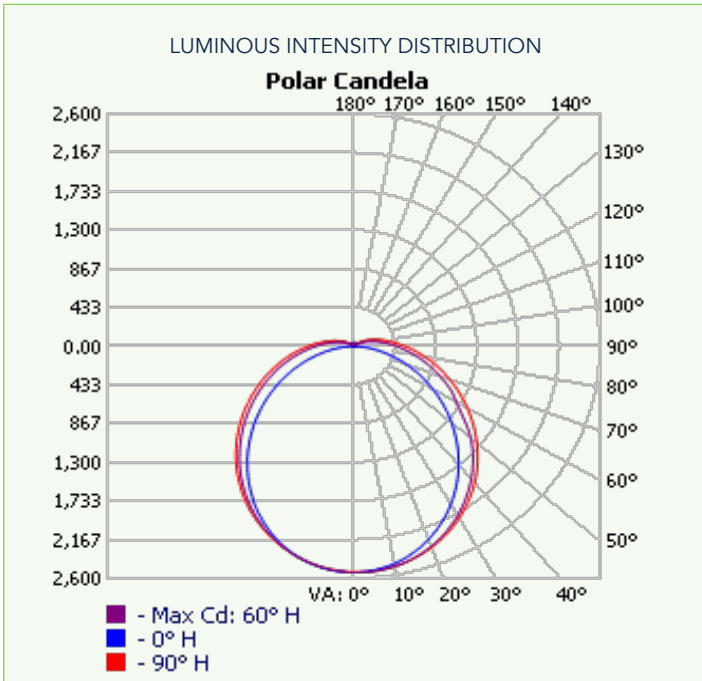

## DIMENSIONS

