

Date: _____ Project: _____

Type: _____ Part #: _____



Ops Security Light

This next-generation security light features a 5CCT DIP switch to easily select color temperatures from 2700K to 5000K. The integrated motion sensor includes a Dusk-to-Dawn (D2D) function with adjustable detection, LUX, and time settings. For optimal aiming, the lamp heads offer 150° horizontal and 180° vertical rotation.



Product Features

- CCT Selectable (5 CCT in 1 fixture) reduces SKU count
- Polycarbonate lens
- Polycarbonate frame
- High lumen output up to 2600 lm
- Wet location rated
- Up to 60 ft detection distance
- 180° detection angle
- Built-in motion sensor with Dusk-to-Dawn (D2D) function
- Operating temp: -20°C to +45°C (-4°F to +113°F)
- Adjustable detection distance, LUX, and time settings
- Multi-directional lamp heads (150° horizontal / 180° vertical rotation)
- Life Time >50,000Hrs
- 10 Year Limited Warranty

Specifications

Voltage	120V AC
Wattage	26W
Selectable CCT	27/30/35/40/5000K
THD	< 20%
Power Factor	> 0.9
CRI	80
Lumens	Up to 2730 lm
Efficacy	105 lm/W @ 5000K
Beam Angle	100°
Recommended Installation Height	3m(9.8ft)
Mounting	Surface Mounting, Soffit Mounted
Applications	Entryways, Front porch, Backyard, Sheds, Decks, Walkways, Fences
Default Setting	5000K

DLC Certification


Model	Application	DLC Standard	DLC Premium
RENO-SW-26W-5CCT-MS-WH	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	Pending
RENO-SW-26W-5CCT-MS-BK	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	Pending

Specifications

Order #	Model	Finish	Watts	Efficacy	Lumens	CCT
R51032	RENO-SW-26W-5CCT-MS-WH	White	26W	105lm/W @5000K	Up to 2730lm	27/30/35/40/5000K
R51033	RENO-SW-26W-5CCT-MS-BK	Black	26W	105lm/W @5000K	Up to 2730lm	27/30/35/40/5000K

Dimensions

Security Light

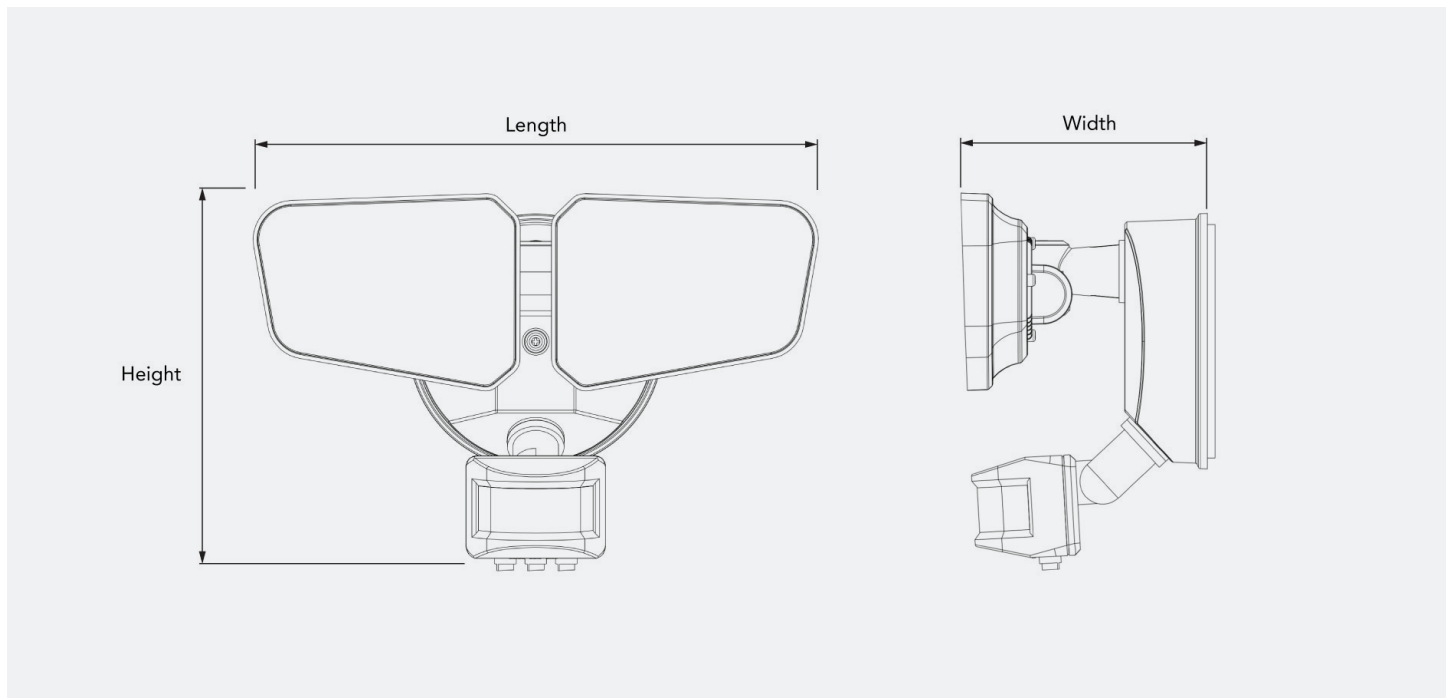

Order #	Model	Length	Width	Height	Weight
R51032	White	10.2" 260mm	4.4" 113mm	6.8" 173mm	0.45kg 0.99 lbs
R51033	Black	10.2" 260mm	4.4" 113mm	6.8" 173mm	0.45kg 0.99 lbs