

Date: _____ Project: _____

Type: _____ Part #: _____



Ops Mini Wall Pack

The OPS Mini Wall Pack delivers a high-performance, energy-efficient lighting solution with a modern, sleek design and sharp, streamlined profile.

Engineered with industry-leading LED chips and drivers, it is designed for quick and easy installation, directly fitting onto existing electrical boxes for seamless replacement of older high-pressure sodium and metal halide wall packs.



Product Features

- Die-cast aluminum body
- Polycarbonate Lens
- Field-adjustable wattages
- Field-adjustable CCT
- Black and white finish options
- Automated Dusk to Dawn photocell functionality
- IP 65
- 2kV Surge Protection
- Operating temp: -30°C to +50°C (-22°F to +122°F)
- Rated Lifetime L70 >50,000 hrs
- 10 Year Limited Warranty

Specifications

Voltage	120-347V
Selectable Wattages	15/20/30W
Selectable CCT	3000K, 4000K, 5000K
THD	< 20%
Power Factor	> 0.9
CRI	>80
Lumens	Up to 3900 lm
Efficacy	130 Lm/W @ 3000K
Beam Angle	90°
Dimming	0-10V
Mounting	Wall Mounting
Applications	Entrance ways, Security lighting, Stairwells, Hallways, Outdoor commercial and residential

DLC Certification


Model	Application	DLC Standard	DLC Premium
RENO-WP-30W-MV-MCCT-SEN-G2-BK	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-GVK8YP
RENO-WP-30W-MV-MCCT-SEN-G2-WH	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-GVK8YP

Specifications @3000K

Order #	Finish	Watts	Lm/W	Lumens	CCT
R51019	Black	15/20/30W	130 lm/W	1950/2600/3900 lm	3000/4000/5000K
R51020	White	15/20/30W	130 lm/W	1950/2600/3900 lm	3000/4000/5000K

Dimensions

Ops Mini Wall Pack

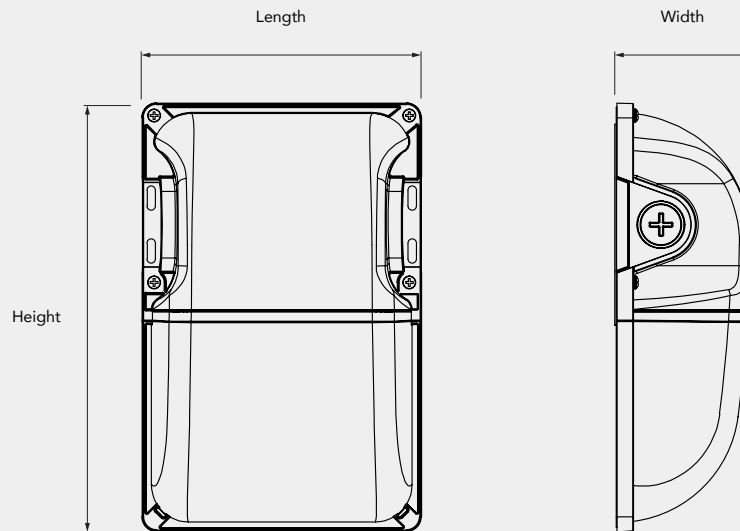

Order #	Finish	Length	Width	Height	Weight
R51019	Black	5.9" 150mm	2.9" 72.8mm	9.1" 230mm	0.67 kg 1.48lb
R51020	White	5.9" 150mm	2.9" 72.8mm	9.1" 230mm	0.67 kg 1.48lb