


Date: _____ Project: _____

Type: _____ Part #: _____

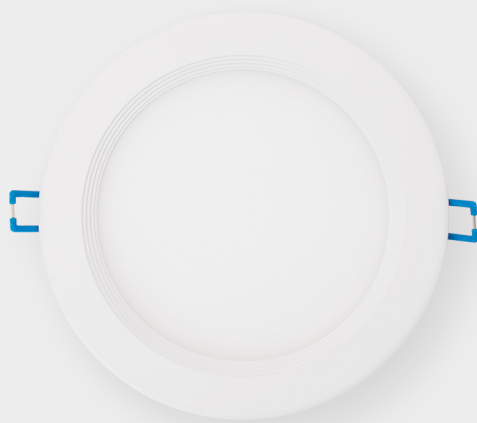

BRILLIANCE Series

Slim Downlight with Regress Baffle

The Brilliance Series 12W Slim Regressed Baffle Downlight features a sleek, modern design with a compact aperture while maintaining exceptional light output.

Delivering up to 1,000 lumens and a CRI of 80+, it offers reliable, high-quality illumination for residential and commercial applications.



Product Features

- Edge-lit technology, no glare or dark spots, instant-on
- Regressed lens and Baffle Trim Design
- I.C. rated for direct contact with insulation
- Suitable for Wet LOCATION
- No existing recessed housing or junction box required
- Operating temperature: (-4°F~104°F) -20~40°C
- 5 year warranty

Specifications


Voltage	120-347V
Wattage	12W
Size	6in
Power Factor	0.9
Selectable CCT	27/30/35/40/5000K
CRI	80+
Lumens	1000lm
Beam Angle	120°
Dimming	Triac dimming
Mounting	Recessed
Applications	Commercial, Residential, Retail Facilities

Specifications – 6in

Order #	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R36110	RENO-6-S12W-5CCT-BF-WH	12W	120-347V	1065.69 lm	88.80 lm/W	2700K
				1100.28 lm	91.69 lm/W	3000K
				1146.78 lm	95.56 lm/W	3500K
				1163.4 lm	96.95 lm/W	4000K
				1163.9 lm	96.99 lm/W	5000K

Accessories


Mounting

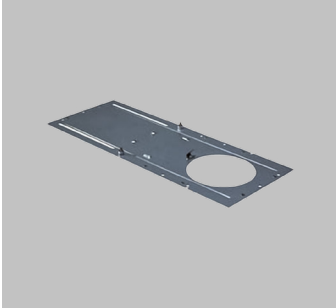

6" Mounting Plate Without clip

R39109

RENO-MP6

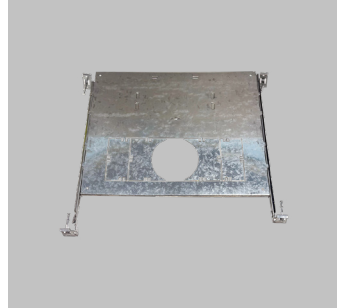


Multiple Head Universal Pre-Mounting New Construction Plate

R39107

RENO-MC-123

Order #	Model	Description
R39109	RENO-MP6	6" Mounting Plate Without clip (OPENING 158MM)
R39107	RENO-MC-123	Multiple Head Universal Pre-Mounting New Construction Plate

Emergency Backup



Internal Mount | Lithium | 8W | 100-347Vac | 7.2V 2600mAh | 50/60Hz | Emergency duration: ≥90mins |


R83006

RENO-EM-E08

Order #	Model	Description
R83006	RENO-EM-E08	Internal Mount Lithium 8W 100-347Vac 7.2V 2600mAh 50/60Hz Emergency duration: ≥90mins

Dimensions

Slim Downlight with Regress Baffle

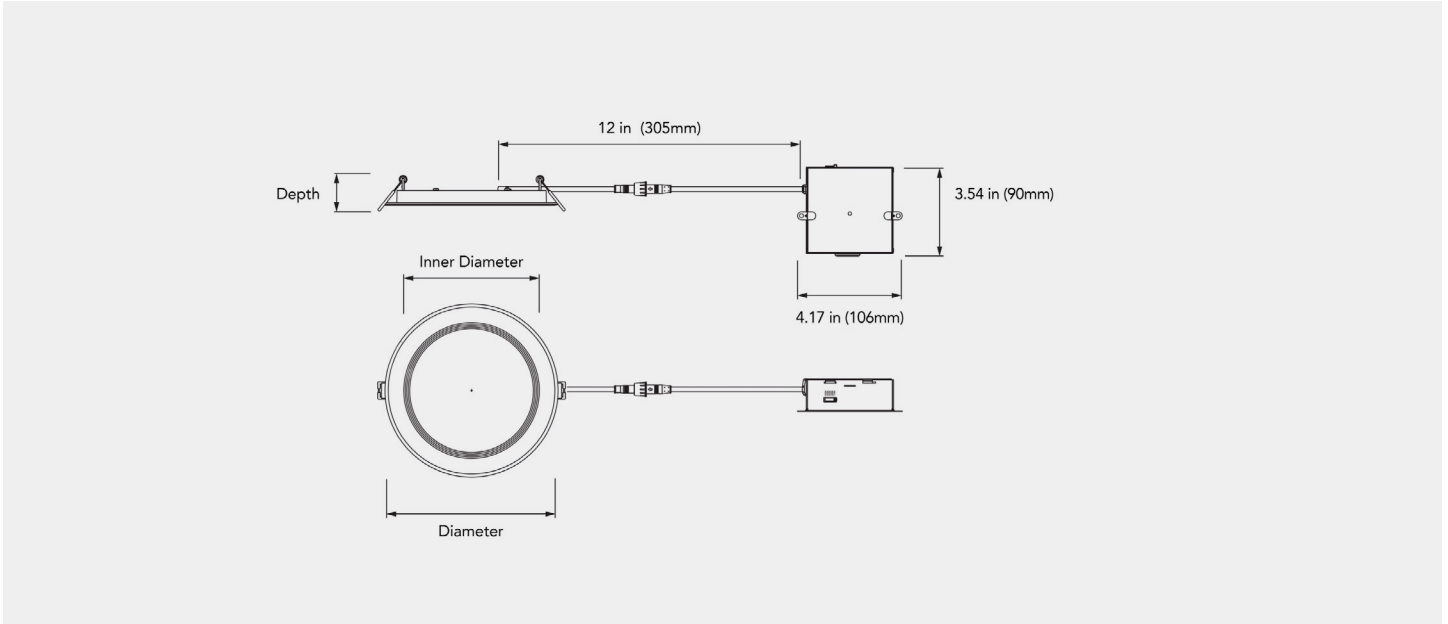

Order #	Diameter	Inner Diameter	Height	Weight
R36110	6 in (175mm)	4.92 in (125 mm)	3.8in (97 mm)	0.42 kg / 0.93lbs