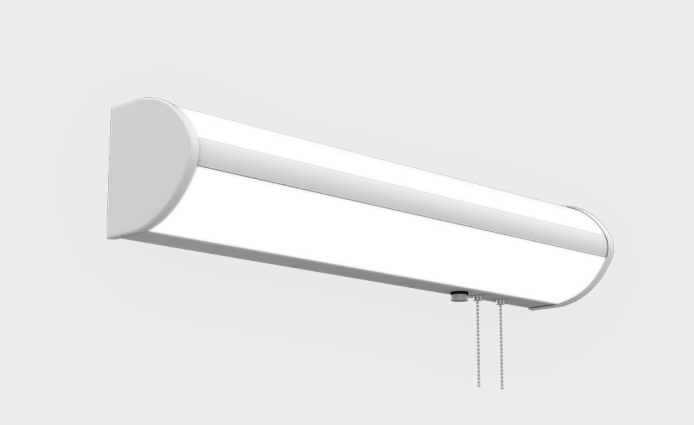


Date: _____ Project: _____

Type: _____ Part #: _____

Cura Series

Overbed Healthcare Light

The Overbed Healthcare Light is designed to elevate modern patient care through versatile tri-configuration lighting. Engineered specifically for healthcare environments, it seamlessly transitions between up-lighting, down-lighting, and combined distribution—delivering customizable visual comfort for patients and optimal illumination for care teams.

PRIME R | DLC LISTED | UL CERTIFIED | MULTI CCT | DUAL V 120-347V | DAMP | DIMMABLE

Product Features

- Easily accessible pull chain switches to toggle between light modes.
- Lighting Options:
  - Direct / Indirect (Up and Down light)
  - Direct (Down light)
  - Indirect (Up light)
  - Night Light Mode (Nightlight)
- Extruded aluminum with white painting, Other colors optional
- Five-stage phosphate-treated white components
- Bonded and finished with a high-reflectance baked enamel
- Snap-in frosted polycarbonate diffuser
- 2.5KV surge protection
- Driver disconnect provided where required to comply with UL.
- Operating temperature:-20 ~ 40 °C(-22°F to +104°F)
- Rated lifetime L70: 100,000+ hours.
- 5 Year Warranty.

Specifications

Voltage	120-347V
Wattage	2ft: 30W 3ft: 45W 4ft: 60W
Power factor	>0.9
Selectable CCT	27/30/35/40/50K (4000K Default)
THD	<20%
CRI	>80
Lumens	2ft: 3,884 lm/W 3ft: 5,945 lm/W 4ft: 8,050 lm/W
Efficacy	2ft: Up to 129 lm/W 3ft: Up to 132 lm/W 4ft: Up to 134 lm/W
Beam angle	120°
Dimming	0-10V dimming
Mounting	Wall mount
Applications	Hospitals, Senior Care & Rehab Facilities

RENO LIGHTING

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com

Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

Specifications – 2FT

Order #	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R33060	RENO-OBL2-UD-30W-DV-MCCT	30 W	120-347 V	3,628.6 lm	120.9 lm/W	2700K
				3,683.8 lm	122.7 lm/W	3000K
				3,753.6 lm	125.1 lm/W	3500K
				3,788.3 lm	126.2 lm/W	4000K
				3,884.0 lm	129.4 lm/W	5000K

Specifications – 3FT

Order #	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R33061	RENO-OBL3-UD-45W-DV-MCCT	45 W	120-347 V	5,624.6 lm	124.9 lm/W	2700K
				5,692.3 lm	126.4 lm/W	3000K
				5,779.1 lm	128.4 lm/W	3500K
				5,873.1 lm	130.5 lm/W	4000K
				5,945.1 lm	132.1 lm/W	5000K

Specifications – 4FT

Order #	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R33062	RENO-OBL4-UD-60W-DV-MCCT	60 W	120-347 V	7,602.3 lm	126.7 lm/W	2700K
				7,665.7 lm	127.7 lm/W	3000K
				7,804.7 lm	130.0 lm/W	3500K
				7,867.7 lm	131.1 lm/W	4000K
				8,050.2 lm	134.1 lm/W	5000K

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.


Certification DLC

Order #	Model	Application	DLC Standard	DLC Premium
R33060	RENO-OBL2-UD-30W-DV-MCCT	Direct Linear Ambient Luminaires	S-LP6N9J	-
R33061	RENO-OBL3-UD-45W-DV-MCCT	Direct Linear Ambient Luminaires	S-1J2H8L	-
		Low-Bay Luminaires for Commercial and Industrial Buildings	S-DK0K0T	-
R33062	RENO-OBL4-UD-60W-DV-MCCT	Direct Linear Ambient Luminaires	S-JTDVBW	-
		Low-Bay Luminaires for Commercial and Industrial Buildings	S-7X4J97	-

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

Dimensions

Cura Light

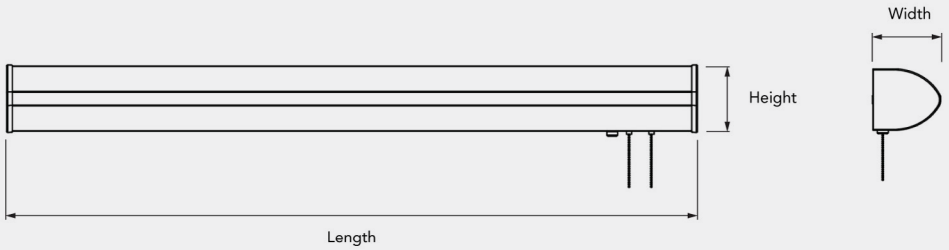

Order #	Size	Length	Width	Height	Weight
R33060	2 FT	23.78" (604 mm)	4.72" (120 mm)	4.63" (117.6 mm)	2.8 kg / 6.2 lbs
R33061	3 FT	36.57" (929 mm	4.72" (120 mm)	4.63" (117.6 mm)	3.4 kg / 7.5 lbs
R33062	4 FT	48.58" (1234 mm)	4.72" (120 mm)	4.63" (117.6 mm)	4.7 kg / 10.4 lbs

RENO LIGHTING

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.