


Date: _____ Project: _____

Type: _____ Part #: _____

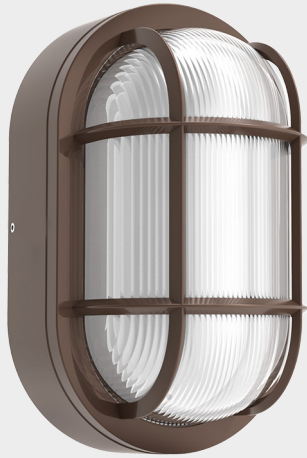

Vanguard Series

Oval Guard LED Bulkhead Lights

Engineered for tough environments, the Oval Guard LED Bulkhead Light delivers durable, energy-efficient illumination. Ideal for saunas, basements, and cabins, or exterior spots like decks, docks, and patios where reliable, weather-resistant light is key.



Product Features

- Weatherproof rubber seal and glass lens deliver superior protection against the elements
- Standard-equipped DC photocell for automated dusk-to-dawn operation
- Robust cast aluminum construction with a durable powder-coat finish
- Complete mounting hardware included for hassle-free installation
- High-performance illumination delivering an outstanding 1,700 lumens at just 20W
- Operating Temperature: -40°C to 45°C (-40°F to 113°F)
- Rated Lifespan: L70 ~ 100,000 Hrs
- 10-Year Limited Warranty

Specifications


Input Voltage	120-347V
Selectable Wattage	12/16/20W (Default: 20W)
Selectable CCT	30/40/50K (Default: 5000K)
Power factor	>0.9
THD	≤20%
CRI	80
Lumens	Up to 2,104 lm
Efficacy	Up to 106 lm/W
Beam Angle	130°
Dimming	0-10V
Mounting	Wall mounted
Applications	Cabin, Basement, Storeroom and Attic, porch, patio, deck, boathouse, dock

Specifications - Oval Guard LED Bulkhead Lights

Order #	Model	Voltage	Wattage	Lumens	Efficacy	CCT
R51080	RENO-OGB-MW-MCCT-BRN	120-347V	12W	1196.2 lm	99.6 lm/W	3,000K
R51081	RENO-OGB-MW-MCCT-WH			1257.7 lm	104.8 lm/W	4,000K
				1272.0 lm	106.0 lm/W	5,000K
			16W	1521.3 lm	95.0 lm/W	3,000K
				1699.6 lm	106.2 lm/W	4,000K
				1623.5 lm	101.4 lm/W	5,000K
			20W	1834.8 lm	91.7 lm/W	3,000K
				2104.8 lm	105.2 lm/W	4,000K
				2025.2 lm	101.2 lm/W	5,000K

Charts


Light Distribution

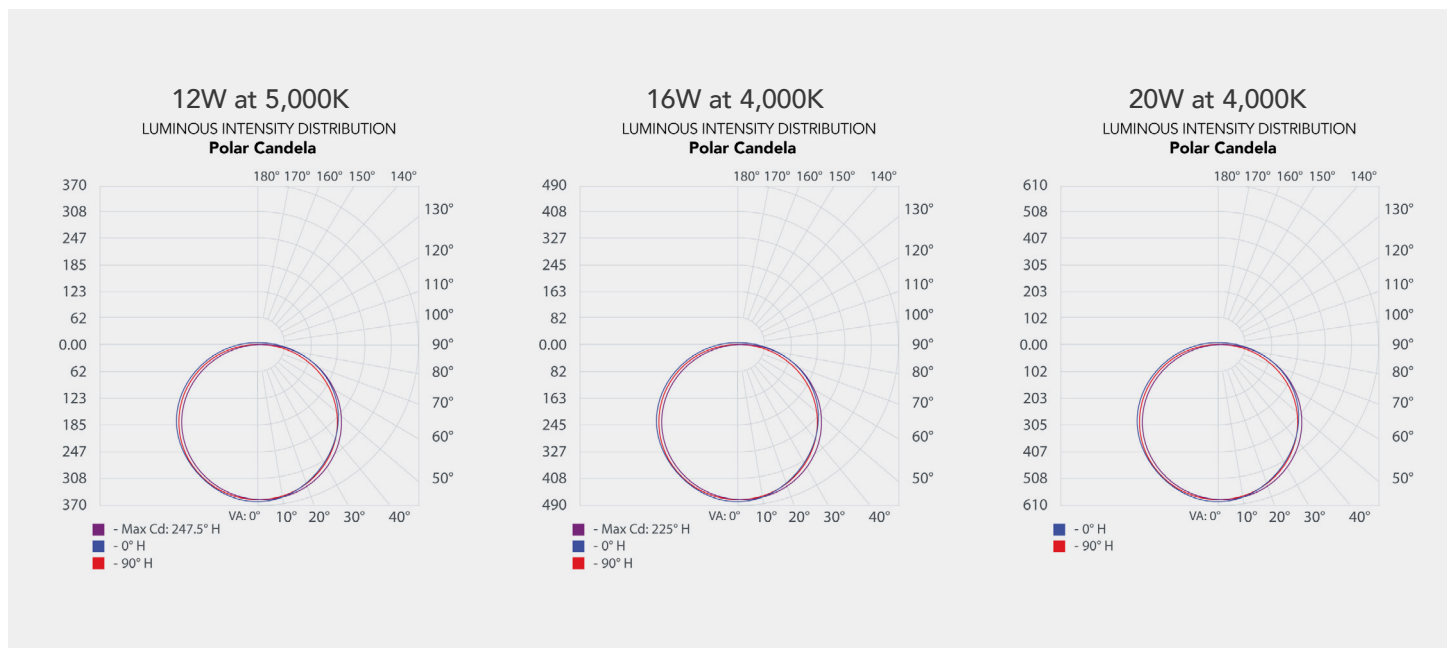

Note: Photometric distribution data covers all wattage options at their highest lumen output.

Dimensions

Oval Guard LED Bulkhead Lights

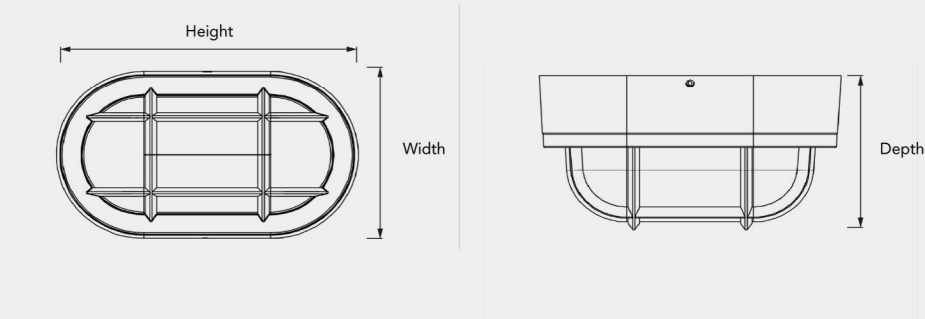

Order #	Model	Height	Width	Depth
R51080	RENO-OGB-MW-MCCT-BRN	9.64" (245.1mm)	5.83" (148.1mm)	5.1" (129.6mm)
R51081	RENO-OGB-MW-MCCT-WH	9.64" (245.1mm)	5.83" (148.1mm)	5.1" (129.6mm)