


Date: _____ Project: _____

Type: _____ Part #: _____

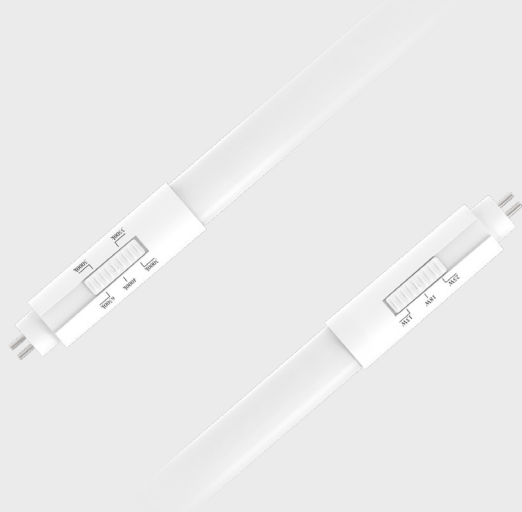

LED Tube Series

T5 Type B Ballast Bypass

Upgrade your lighting with the T5 Type B Ballast Bypass 4FT G5 LED tube. Its intelligent misuse-protected design prevents the lamp from turning on if the ballast hasn't been bypassed, eliminating the risk of fire hazards or melted end caps. With 5-in-1 CCT and 3-power selection to reduce stock pressure, plus triac dimming support, it's a smart, safe upgrade.



Product Features

- Misuse-Prevention Protection keeps the lamp from powering on if the ballast bypass is forgotten, helping eliminate fire hazards and melted end caps.
- Built-in slide switches offer 5-CCT selection and adjustable wattage, consolidating SKUs and reducing inventory pressure.
- Continuous Triac Dimming Provides smooth dimming with a standard triac dimmer on AC 120V.
- ETL Sanitation Certified and tested to NSF standards, making it a safe, reliable choice for food equipment areas and commercial environments.
- PC + Glass Construction Durable PC (polycarbonate) and glass body with a white finish and protective glass powder coating.
- Operating Temperature: -20°C~45°C (-4°F to 113°F)
- Rated Lifespan: L70 ~ 100,000 Hrs
- 5-year warranty.

Specifications


Voltage	120-347V
Lamp Base	G5
Size	4FT
Selectable Wattage	13/18/25W
Selectable CCT	30/35/40/50/65K
Lumens	Up to 3,451 lm
Efficacy	Up to 148 lm/W
CRI	80
Beam Angle	160°
Dimming	TRIAC Dimming on 120V Only

Specifications - T5 Type B Ballast Bypass

Order #	Model	Voltage	Wattage	Lumens	Efficacy	CCT
R42129	RENO-LEDT5BP-MW-MCCT-48G	120-347V	13W	1831.3 lm	140.8 lm/W	3,000K
				1898.6 lm	146.0 lm/W	3,500K
				1927.0 lm	148.2 lm/W	4,000K
				1928.7 lm	148.3 lm/W	5,000K
				1889.4 lm	145.3 lm/W	6,500K
		120-347V	18W	2436.2 lm	135.3 lm/W	3,000K
				2552.5 lm	141.8 lm/W	3,500K
				2604.6 lm	144.7 lm/W	4,000K
				2600.2 lm	144.4 lm/W	5,000K
				2504.7 lm	139.1 lm/W	6,500K
		120-347V	25W	3149.7 lm	125.9 lm/W	3,000K
				3347.3 lm	133.8 lm/W	3,500K
				3451.7 lm	138.0 lm/W	4,000K
				3434.3 lm	137.3 lm/W	5,000K
				3243.9 lm	129.7 lm/W	6,500K


Accessories

Sockets & Disconnectors

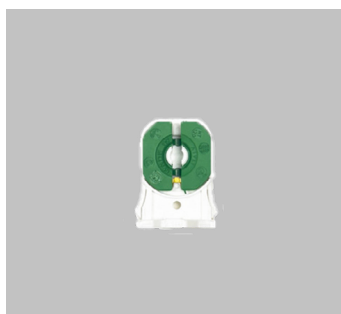

T5 Lamps Linear Fluorescent Light Socket

RENO-289/SN-15-PBT

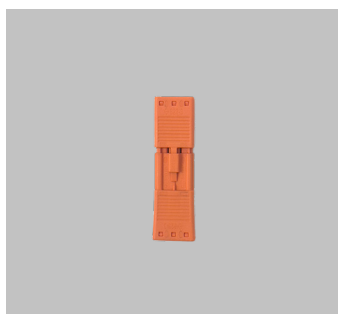


Quick Disconnect

RENO-DISCONNECT

Model	Description
RENO-289/SN-15-PBT	T5 Lamps Linear Fluorescent Light Socket
RENO-DISCONNECT	Quick Disconnect

Dimensions

T5 Type B Ballast Bypass

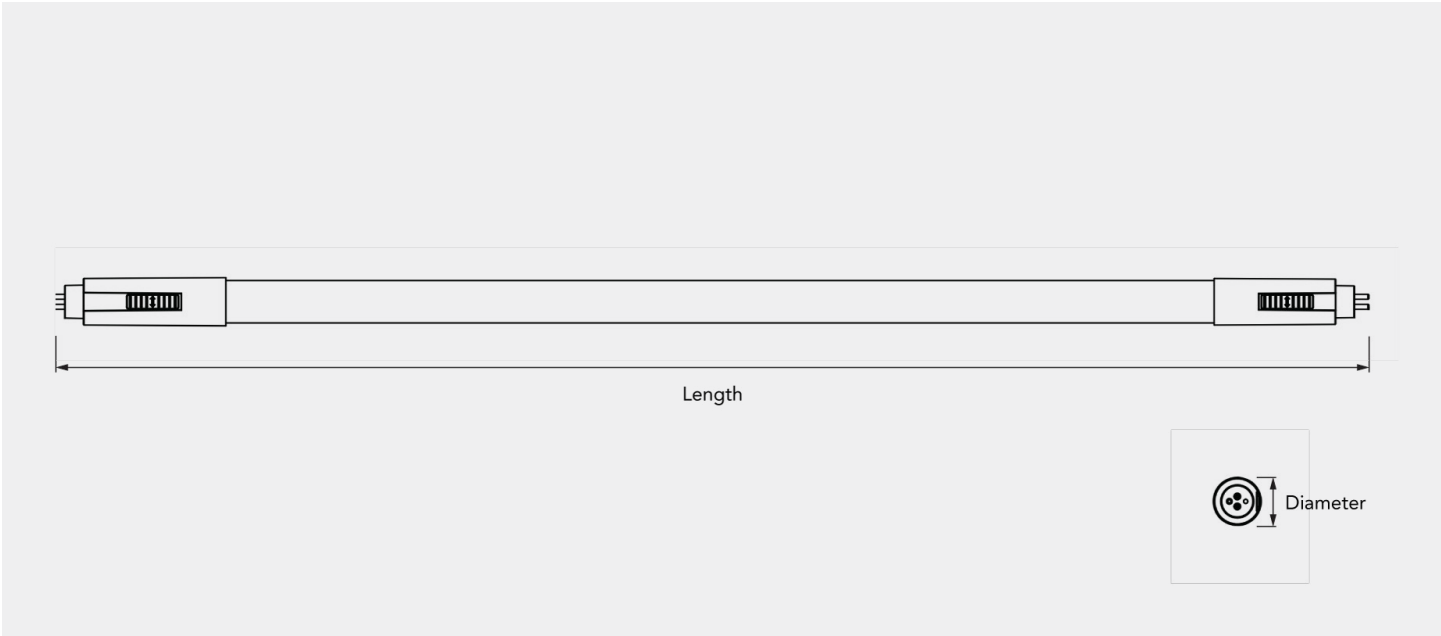

Order #	Model	Length	Diameter	Weight
R42129	RENO-LEDT5BP-MW-MCCT-48G	45.80" (1163.2 mm)	0.9" (23mm)	0.18kg (0.3968 lbs)