

Date: _____ Project: _____

Type: _____ Part #: _____

All-in-One

4FT T8 Tube | Type A Direct Fit

The All-in-One 4FT T8 Tube | Type A Direct Fit illuminates any space with bright, even light while delivering great energy efficiency. Selectable wattage and CCT on the tube replace multiple fixed lamps with a single SKU, and simple onboard switches make field adjustment easy. It installs quickly with compatible existing ballasts, and shatter-resistant protection helps contain glass fragments.



Product Features

- Selectable Wattage & CCT lets you adjust light output and color temperature right on the tube.
- Jobsite Flexibility lets one tube adapt to different applications and lighting needs.
- Easy Field Adjustment uses simple onboard switches, so there's no need to swap lamps.
- Type A Plug-and-Play installs quickly with compatible existing ballasts.
- Shatter-Resistant Protection helps contain glass fragments if the tube breaks, reducing safety hazards.
- Operating Temperature: -20 °C to +45 °C (-4 °F to 113 °F)
- Rated Lifespan: L70 ~ 100,000 Hrs
- 5 Years Warranty

Specifications

Voltage	BF
Lamp Base	G13 base
Size	4FT
Wattage	12.5/13.5/16W
Selectable CCT	30/35/40/50/65K
Lumens	Up to 3,017 lm
Efficacy	Up to 199 lm/W
CRI	80
Beam Angle	180°
Storage Temperature	-20 to +65 °C (-4 to 149 °F)
Dimming	TRIAC Dimming on 120V Only


Specifications

4FT T8 Tube | Type A Direct Fit

Order #	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R41029	RENO-LEDT8BC-MW-MCCT-48G	12.5W	BF	2,071.6 lm	165.7 lm/W	3000K
				2,146.6 lm	171.7 lm/W	3500K
				2,188.9 lm	175.1 lm/W	4000K
				2,167.9 lm	173.4 lm/W	5000K
				2,123.3 lm	169.8 lm/W	6500K
				2,547.3 lm	188.6 lm/W	3000K
		13.5W		2,663.7 lm	197.3 lm/W	3500K
				2,695.1 lm	199.6 lm/W	4000K
				2,675.7 lm	198.2 lm/W	5000K
				2,604.7 lm	192.9 lm/W	6500K
				2,814.7 lm	175.9 lm/W	3000K
				2,959.1 lm	184.9 lm/W	3500K
		16W		3,017.9 lm	188.6 lm/W	4000K
				3,015.4 lm	188.4 lm/W	5000K
				2,884.6 lm	180.2 lm/W	6500K

Accessories

Mounting




**Low profile rotary lock
T8 socket**

RENO-S-SN-U-PBT

Model	Description
RENO-S-SN-U-PBT	Low Profile Rotary Lock Flexible Shoulder Shunted T8 SOCKET

Dimensions

4FT T8 Tube | Type A Direct Fit

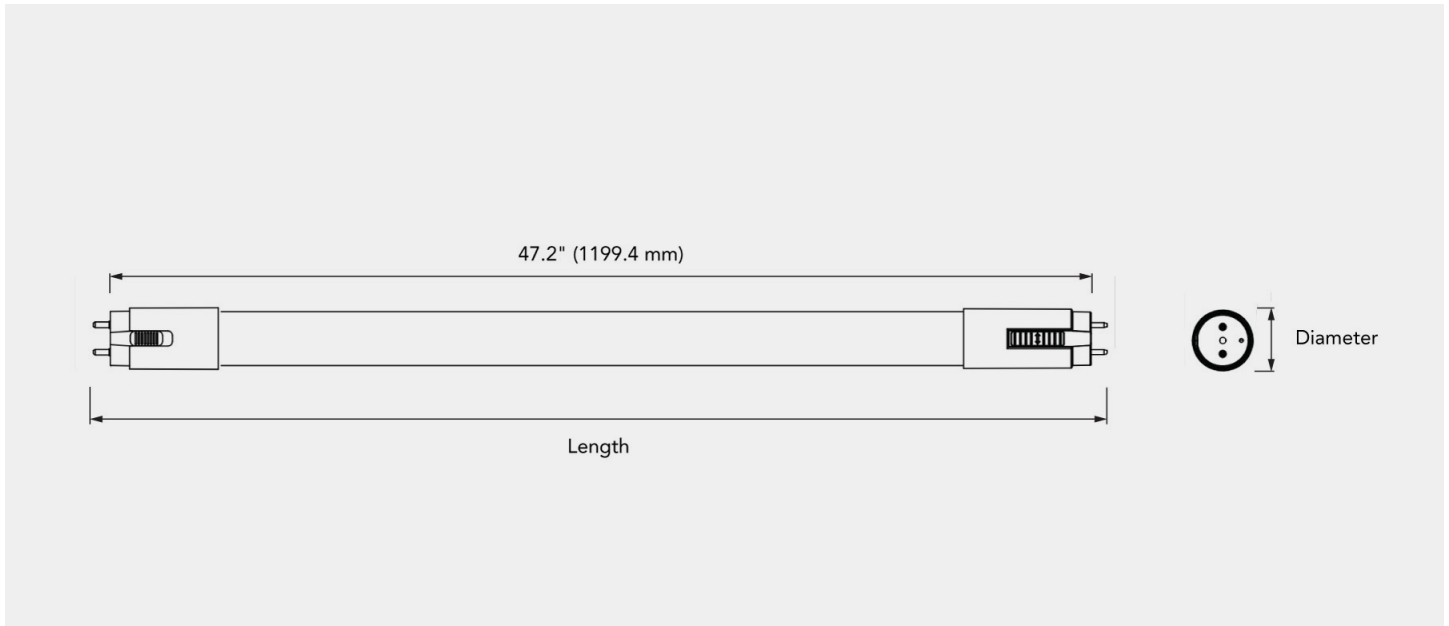

Order #	Length	Diameter	Weight
R41029	47.8" (1213.6 mm)	1.14" (29 mm)	0.22 kg (0.485 lbs)