

Date		Project	
Type		Part Number	



ALL-IN-ONE PERFORMANCE LIGHTING

T8 Series

T8 Type A Tubes

The T8 Type A Tube is an energy-efficient LED lighting solution designed to replace traditional fluorescent tubes. With a simple plug-and-play installation, it fits seamlessly into existing T8 fixtures without the need for rewiring. Offering bright, uniform lighting and a long lifespan, it is ideal for commercial, industrial, and residential applications.



PRODUCT FEATURES

- Nano Plastic Construction
- No UV or IR radiation
- Direct plug-in & Safe Installation
- Compatible with instant & programmed start ballast
- Operating temperature: -4°F to +113°F (-20°C to +45°C)
- Rated Lifespan: L70 ~50,000 hrs
- 5 year warranty

KEY SPECIFICATIONS


Voltage	Ballast Factor
Base	G13 (Medium Bi-Pin)
Wattage	9W
Length	4FT
Power Factor	>0.9
CCT	3500K, 4000K
CRI	>83
Lumens	1,750 - 1,800 lm
Beam Angle	320°
Applications	Commercial, Residential, Warehouse, Retail Facilities



SPECIFICATIONS – T8 TYPE A

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R41013	RENO-LEDT8BC9/835/HE-NANO	9W	BF	1,750 lm	194 lm/W	3500K
R41044	RENO-LEDT8BC9/840/HE-NANO	9W	BF	1,800 lm	200 lm/W	4000K

ACCESSORIES

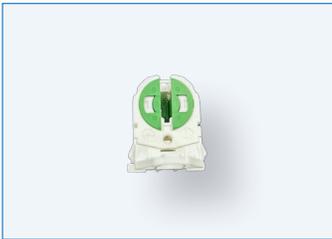


RENO-S-SN-U-PBT

Shunted T8 Socket

Model	Description
RENO-S-SN-U-PBT	Shunted T8 Socket

DIMENSIONS

T8

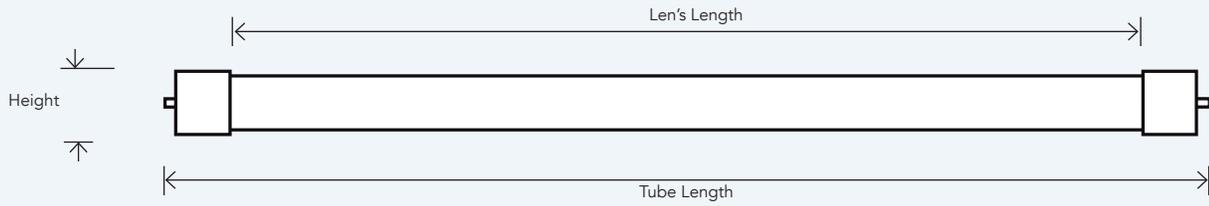

Len's Length: 44.7" (1135.4 mm)

Height: 1.0" (25.4 mm)

Tube Length: 47.2" (1189.9 mm)

Weight: 0.5 lbs (0.23 kg)