

Date		Project	
Type		Part Number	




ALL-IN-ONE PERFORMANCE LIGHTING

# LUXOR Series

## 20x60 Metric Backlit Flat Panel

RENO Lighting's Luxor series metric backlit flat panel is a versatile lighting fixture. With even light distribution and a seamless design, the Aim Series technologies allow for numerous configurations of light in one fixture, making it extremely versatile to suit various application needs. This panel is proven efficient and provides uniform light with a long maintenance-free life.

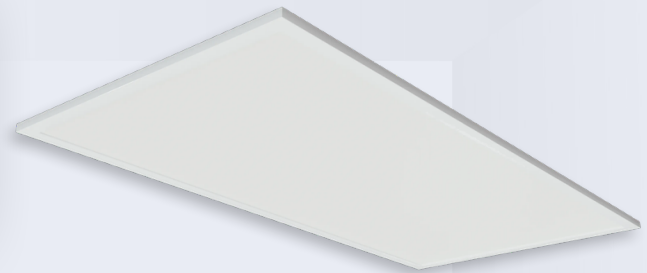

## PRODUCT FEATURES

- Easy lay-in installation to fit 500mm x 1,500mm metric ceiling systems or Suspended Installation
- Backlit technology that offers even light distribution without shadowing
- PMMA Lens prevents yellowing
- Available in 20x60 (Metric)
- Damp location suitable
- Rated Lifespan: L70 ~100,000 hrs
- Operational Temperature: -4°F to +122°F (-20°C to +50°C)
- 10 year limited warranty
- Can be used as an emergency backup unit powered by the RENO-EM-H15 Emergency LED Driver

## KEY SPECIFICATIONS

<b>Voltage</b>	120-347V
<b>Wattage</b>	<b>Selectable Wattages</b> 30/40/50/60W
<b>Sizes</b>	500mm x 1,500mm (Metric)
<b>Power Factor</b>	>0.85
<b>CCT</b>	<b>Selectable CCT</b> 35/40/5000K
<b>CRI</b>	>80
<b>Lumens</b>	Up to 8,725 lm
<b>Beam Angle</b>	125°
<b>Dimming</b>	0-10V
<b>Mounting</b>	T-Grid, Suspension
<b>Applications</b>	Commercial, Residential, Warehouse, Retail Facilities


 EMERGENCY  
 BACKUP READY



## SPECIFICATIONS – 20X60 (METRIC) MULTI POWER (30/40/50/60W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R35308	RENO-2060BLPL-UNV/347-MWMCCT	30W	120-347V	4,417 lm	147 lm/W	3500K
				4,465 lm	149 lm/W	4000K
				4,462 lm	148 lm/W	5000K
		40W	120-347V	5,763 lm	144 lm/W	3500K
				5,908 lm	148 lm/W	4000K
				5,871 lm	147 lm/W	5000K
		50W	120-347V	7,290 lm	145 lm/W	3500K
				7,448 lm	149 lm/W	4000K
				7,320 lm	146 lm/W	5000K
		60W	120-347V	8,522 lm	142 lm/W	3500K
				8,725 lm	145 lm/W	4000K
				8,605 lm	143 lm/W	5000K

## DLC CERTIFICATION

Order#	Model	Application	DLC Standard	DLC Premium
R35308	RENO-2060BLPL-UNV/347-MWMCCT	Low-Bay Luminaires for Commercial and Industrial Buildings	–	S-VC29GK

## PHOTOMETRICS – 60W @ 4K

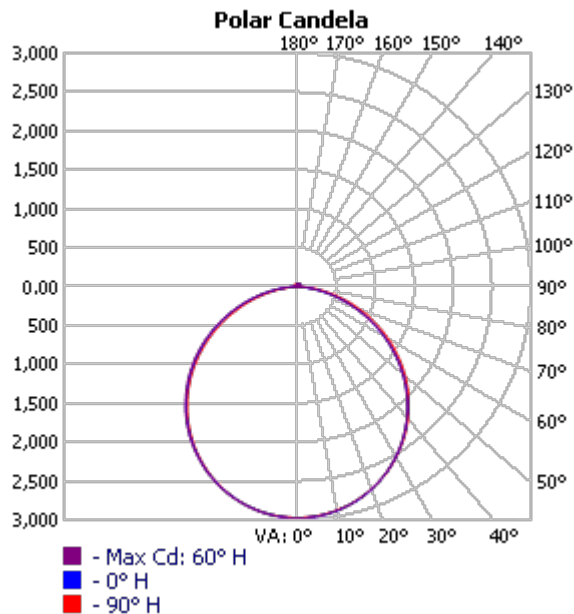

## ACCESSORIES – MOUNTING



R39204  
 RENO-RP-ROPE  
 Aircraft Suspension Cable

Order#	Model	Description
R39204	RENO-RP-ROPE	Aircraft Suspension Cable for 20x60 fixture

## ACCESSORIES – EMERGENCY LED DRIVERS




R83001  
 RENO-EM-H15  
 Emergency LED Driver  
 (100-347V AC, 50-60Hz, 15W)

Order#	Model	Description
R83001	RENO-EM-H15	Emergency LED Driver (100-347V AC, 50-60Hz, 15W)

## DIMENSIONS

### RENO-2060BLPL-UNV/347-MWMCCT

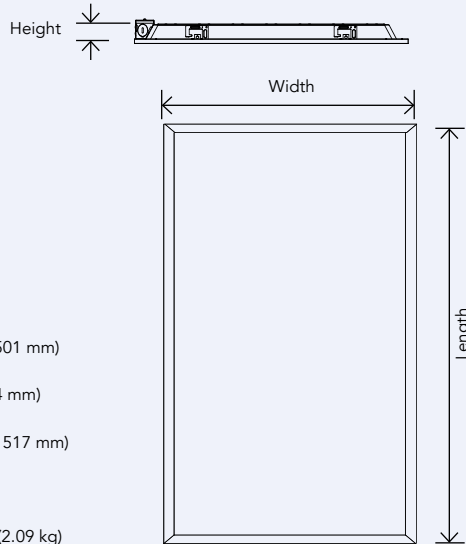

Width: 19.7" (501 mm)  
 Height: 1.3" (34 mm)  
 Length: 59.7" (1517 mm)  
 Weight: 4.6 lbs (2.09 kg)