

Date		Project	
Type		Part Number	



ALL-IN-ONE PERFORMANCE LIGHTING

PRISM Series

Center Basket Troffer

The Prism Series introduces a cutting-edge evolution of the traditional Center Basket Troffer, designed to elevate both performance and aesthetics. Featuring an innovative angled lens, this product creates a dynamic play of light that adds depth and dimension to any space. With the added flexibility of Multi CCT and Wattage options, installation becomes seamless and adaptable, ensuring the ideal illumination for a wide range of applications. Whether you're outfitting offices, retail spaces, or healthcare environments, the Prism Series guarantees superior lighting that meets both functional and design needs.



PRODUCT FEATURES

- DLC Premium
- Housing fabricated from 22-gauge, cold-rolled steel
- Powder-coated finish white
- 0-10V Dimming
- Optional PIR sensor available
- Damp location suitable
- Operating temperature: -4°F to +122°F (-20°C to +50°C)
- Rated Lifespan: L70 ~100,000 hrs
- 10 year limited warranty



EMERGENCY
BACKUP READY



RENO SMART
NLC SYSTEM



STANDALONE
SENSOR OPTIONS

KEY SPECIFICATIONS

Voltage	120-347V
Wattage	Selectable 1x4 - 20/25/30/40W 2x2 - 20/25/30/40W 2x4 - 29/34/39/49W
Sizes	1x4, 2x2, & 2x4
Power Factor	>0.9
CCT	3500K, 4000K, 5000K
CRI	>80
Lumens	Up to 6,401 lm
Beam Angle	110°
Dimming	0-10V
Mounting	T-Bar Ceiling
Applications	Commercial, Offices, Education Institutes, Healthcare Facilities, Retail Facilities



SPECIFICATIONS – 1X4 MULTI POWER (20/25/30/40W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R37014	RENO-14CTF-UNV/347-MWMCCT-HL	20W	120-347V	2,703 lm	135 lm/W	3500K
				2,787 lm	139 lm/W	4000K
				2,763 lm	138 lm/W	5000K
		25W	120-347V	3,269 lm	130 lm/W	3500K
				3,394 lm	136 lm/W	4000K
				3,347 lm	134 lm/W	5000K
		30W	120-347V	3,786 lm	126 lm/W	3500K
				3,952 lm	131 lm/W	4000K
				3,878 lm	129 lm/W	5000K
		40W	120-347V	4,863 lm	121 lm/W	3500K
				5,110 lm	128 lm/W	4000K
				4,957 lm	124 lm/W	5000K

SPECIFICATIONS – 2X2 MULTI POWER (20/25/30/40W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R37015	RENO-22CTF-UNV/347-MWMCCT-HL	20W	120-347V	2,593 lm	129 lm/W	3500K
				2,681 lm	134 lm/W	4000K
				2,666 lm	133 lm/W	5000K
		25W	120-347V	3,149 lm	126 lm/W	3500K
				3,280 lm	131 lm/W	4000K
				3,241 lm	129 lm/W	5000K
		30W	120-347V	3,681 lm	123 lm/W	3500K
				3,855 lm	128 lm/W	4000K
				3,783 lm	126 lm/W	5000K
		40W	120-347V	4,718 lm	118 lm/W	3500K
				4,976 lm	124 lm/W	4000K
				4,834 lm	121 lm/W	5000K


SPECIFICATIONS – 2X4 MULTI POWER (29/34/39/49W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R37006	RENO-24CTF-UNV/347-MWMCCT	29W	120-347V	3,847 lm	133 lm/W	3500K
				3,847 lm	133 lm/W	4000K
				3,782 lm	130 lm/W	5000K
		34W	120-347V	4,330 lm	127 lm/W	3500K
				4,505 lm	132 lm/W	4000K
				4,438 lm	130 lm/W	5000K
		39W	120-347V	4,925 lm	126 lm/W	3500K
				5,091 lm	130 lm/W	4000K
				5,001 lm	128 lm/W	5000K
		49W	120-347V	6,102 lm	125 lm/W	3500K
				6,401 lm	131 lm/W	4000K
				6,215 lm	127 lm/W	5000K


DLC CERTIFICATION

Order#	Model	Application	DLC Standard	DLC Premium
R37014	RENO-14CTF-UNV/347-MWMCCT-HL	Luminaires for Ambient Lighting	S-WGCZGB	–
		Low-Bay Luminaires	–	S-8XRQP2
R37015	RENO-22CTF-UNV/347-MWMCCT-HL	Luminaires for Ambient Lighting	S-91N32V	–
		Low-Bay Luminaires	–	S-S0QFW9
R37006	RENO-24CTF-UNV/347-MWMCCT	Luminaires for Ambient Lighting	–	S-BUSJFQ
		Low-Bay Luminaires	–	S-M8S98Z


ACCESSORIES – MOUNTING




R39211
RENO-RFK14
Recessed Flange Kit for 1X4
Fixtures




R39212
RENO-RFK22
Recessed Flange Kit for 2X2
Fixtures




R39213
RENO-RFK24
Recessed Flange Kit for 2X4
Fixtures



R39201
RENO-SMK14
1X4 surface mounted kits



R39202
RENO-SMK22
2X2 surface mounted kits



R39203
RENO-SMK24
2X4 surface mounted kits

Order#	Model	Description
R39211	RENO-RFK14	Recessed Flange Kit for 1X4 Fixtures
R39212	RENO-RFK22	Recessed Flange Kit for 2X2 Fixtures
R39213	RENO-LHB-CK-R2/R3	Recessed Flange Kit for 2X4 Fixtures
R39201	RENO-SMK14	1X4 surface mounted kits
R39202	RENO-SMK22	2X2 surface mounted kits
R39203	RENO-SMK24	2X4 surface mounted kits

ACCESSORIES – EMERGENCY LED DRIVERS



R83001
RENO-EM-H15
Emergency LED Driver

Order#	Model	Description
R83001	RENO-EM-H15	External Mount Emergency Driver, 15W Output, ≥90 Minutes Operating Time


ACCESSORIES – STANDALONE SENSOR & REMOTES



R74001
 RENO-SENSOR-PIR-H
 PIR Sensor for Troffers and
 Center Basket Fixtures




R73002
 RENO-REMOTE-H
 Remote Control for Standalone
 Sensors




R73005
 RENO-REMOTE-H-ECO
 Remote Control for Standalone
 Sensors

Order#	Model	Description
R74001	RENO-SENSOR-PIR-H	PIR Sensor for Troffers and Center Basket Fixtures
R73002	RENO-REMOTE-H	Remote Control for Standalone Sensors (With Screen) Note: Only 1 needed per project.
R73005	RENO-REMOTE-H-ECO	Remote Control for Standalone Sensors (With Screen) Note: Only 1 needed per project.

ACCESSORIES – RENO SMART NLC SENSORS



R75003
 RENO-RS-BPRN-12V
 Bluetooth PIR Sensor for
 RENO Smart NLC System





R75201
 RENO-RS-GW-BCNW
 Ceiling Mounted Gateway for
 RENO Smart NLC System



Order#	Model	Description
R75003	RENO-RS-BPRN-12V	Bluetooth PIR Sensor for Troffers and Flat Panels
R75201	RENO-RS-GW-BCNW	Ceiling Mounted Gateway for RENO Smart NLC System

****All Reno Smart Sensors are programmed/commissioned using our Reno Smart App**



PHOTOMETRICS - 1X4

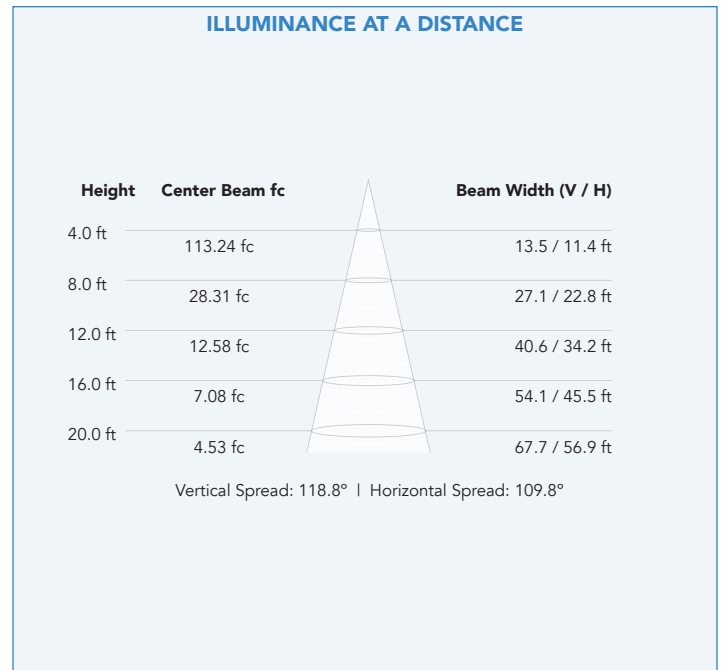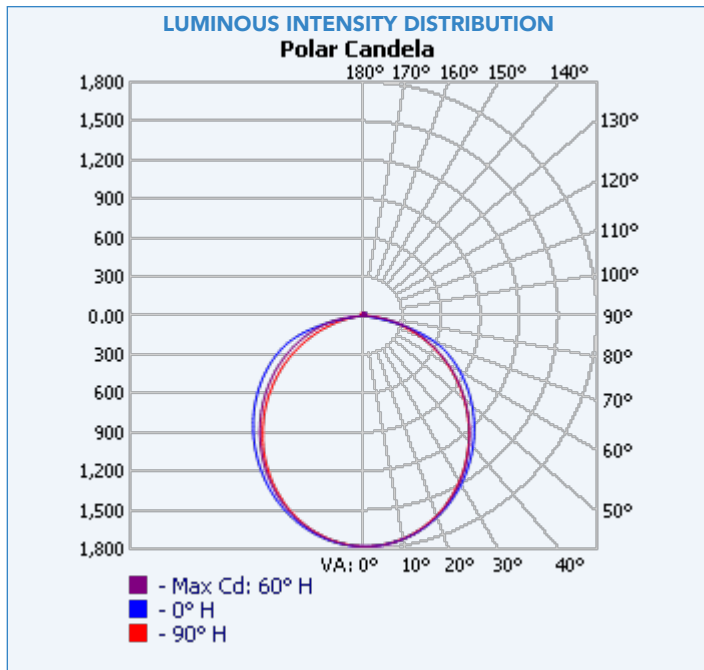

PHOTOMETRICS - 2X2

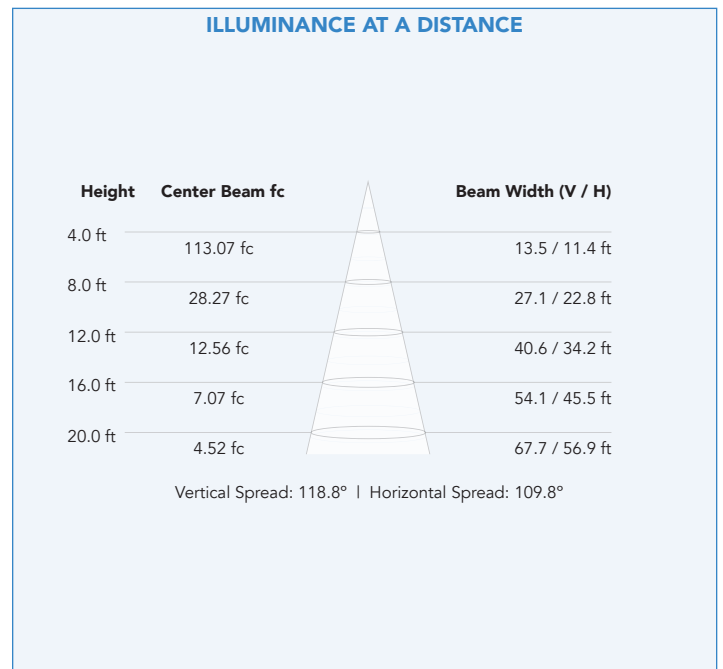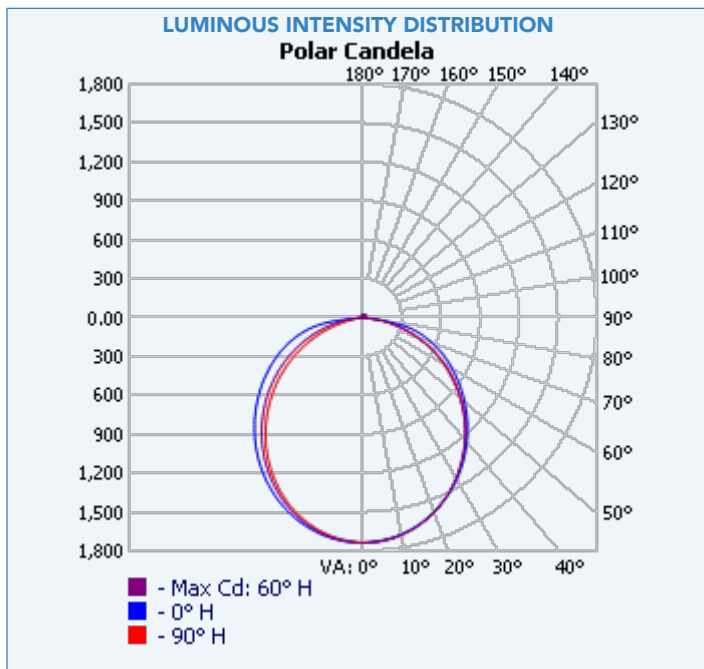


PHOTOMETRICS - 2X4

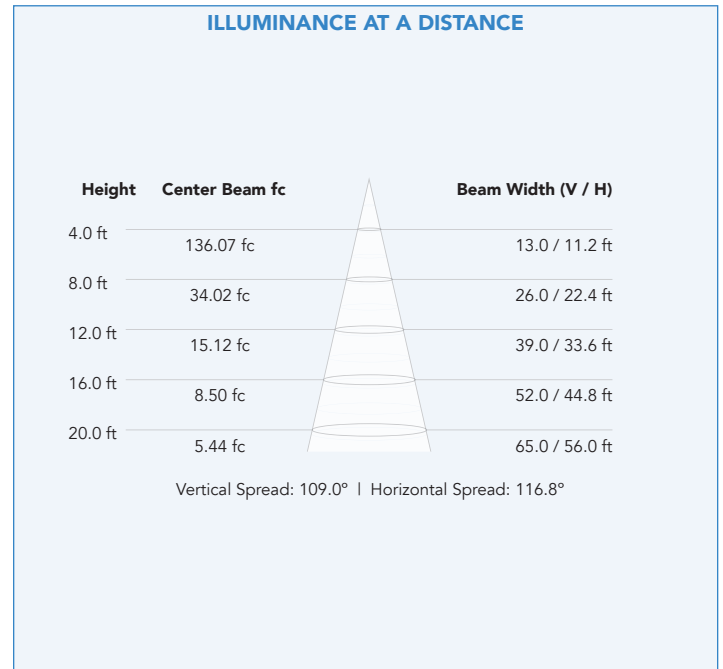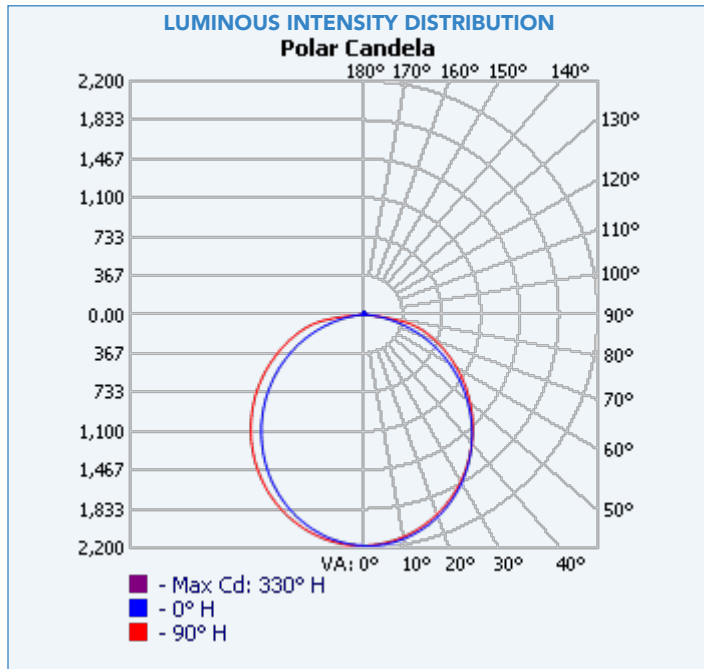


DIMENSIONS

1X4

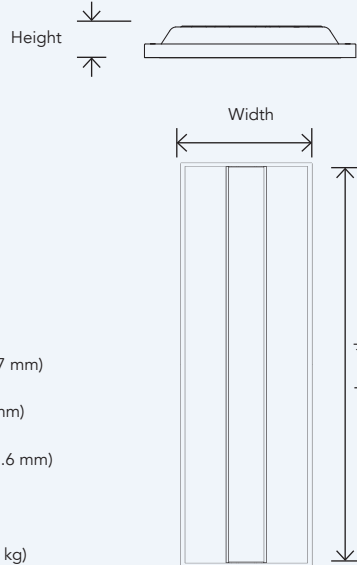


Width: 11.8" (299.7 mm)
 Height: 2.3" (53.3 mm)
 Length: 47.7" (1211.6 mm)
 Weight: 11 lbs (4.98 kg)

2X2

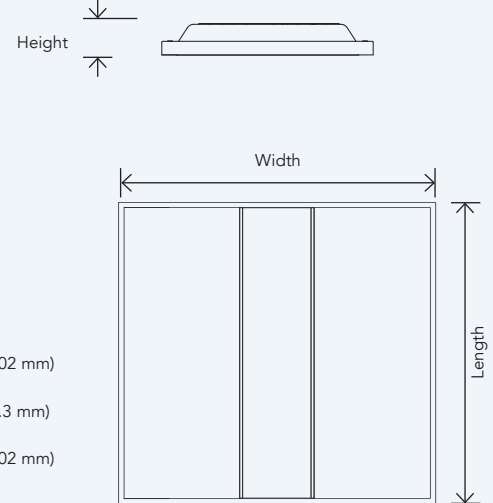

Width: 23.7" (602 mm)
 Height: 2.3" (53.3 mm)
 Length: 23.7" (602 mm)
 Weight: 15 lbs (6.80 kg)

2X4

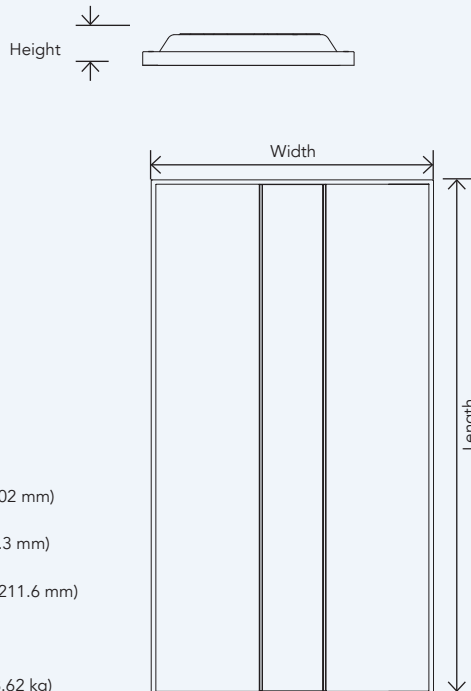

Width: 23.7" (602 mm)
 Height: 2.3" (53.3 mm)
 Length: 47.7" (1211.6 mm)
 Weight: 19 lbs (8.62 kg)