

Date		Project	
Type		Part Number	



ALL-IN-ONE PERFORMANCE LIGHTING

FLARE Series

Slim Square Canopy

The Flare series Square canopy is DLC Premium listed and ETL for wet locations with a rating of IP65. It's quick to install and aesthetically pleasing construction, with die-cast aluminum housing and shatter-resistant polycarbonate prismatic lens makes this fixture perfect for most outdoor lighting needs. Dustproof, sealed structure, 1/2" threaded conduit entrances on each side provide versatility and unmatched quality. This fixture comes with an option for microwave occupancy or photocell sensor, installed with a DC adapter. Ideal applications for parking garage, canopy, walkway and entrance lighting etc.



PRODUCT FEATURES

- Aluminum Alloy Construction
- Polycarbonate Lens
- Black Powder-Coated Finish
- Operating temperature: -40°F to +104°F (-40°C to +40°C)
- IP65 Rated Wet Location
- 0-10V Dimming
- Rated Lifespan: L70 ~100,000 hrs
- 10 year limited warranty

KEY SPECIFICATIONS

Voltage	120-347V
Wattage	Selectable Wattage R1: 25/30/35/40W R2: 45/55/65/75W
Efficacy	130 lm/W
Power Factor	>0.9
CCT	Selectable: 3000K, 4000K, 5000K
CRI	>80
Lumens	Up to 9,750 lm
Beam Angle	140°
Dimming	0-10V
Mounting	Surface
Applications	Commercial, Warehouse, Gas Stations, Parking Garages


 EMERGENCY
BACKUP READY

 RENO SMART
NLC SYSTEM

 STANDALONE
SENSOR OPTIONS


SPECIFICATIONS – R1 MULTI POWER (25/30/35/40W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R52017	RENO-SCP-40W-MW-DV-MCCT-R1	25/30/35/40W	120-347V	3250/3900/ 4550/5200 lm	130 lm/W	30/40/5000K

SPECIFICATIONS – R2 MULTI POWER (45/55/65/75W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R52018	RENO-SCP-75W-MW-DV-MCCT-R2	45/55/65/75W	120-347V	5850/7150/ 8450/9750 lm	130 lm/W	30/40/5000K

DLC CERTIFICATION

Order#	Model	Application	DLC Standard	DLC Premium
R52017	RENO-SCP-40W-MW-DV-MCCT-R1	Parking Garage Luminaires	–	S-ICGLFW
R52018	RENO-SCP-75W-MW-DV-MCCT-R2	Parking Garage Luminaires	–	S-I0LD5C


ACCESSORIES – EMERGENCY LED DRIVERS




R83010
 RENO-EM-EX15
 All Weather Emergency Driver
 (100-347V AC, 50-60Hz, 15W)

Order#	Model	Description
R83010	RENO-EM-EX15	All Weather Emergency Driver (100-347V AC, 50-60Hz, 15W)


ACCESSORIES – STANDALONE SENSOR & REMOTES



R71002
 RENO-SENSOR-MW-H
 Bi-Level Microwave Sensor



R72001
 RENO-SENSOR-PC-S
 Photocell Sensor



R74004
 RENO-SENSOR-PIR3.5-PH15M
 Long Detection Range PIR
 Sensor



R73002
 RENO-REMOTE-H
 Remote Control for Standalone
 Sensors (With Screen)



R73005
 RENO-REMOTE-H-ECO
 Remote controller for Highbays
 (without screen)

Order#	Model	Description
R71002	RENO-SENSOR-MW-H	Bi-Level Microwave Sensor
R72001	RENO-SENSOR-PC-S	Photocell Sensor
R74004	RENO-SENSOR-PIR3.5-PH15M	Long Detection Range PIR Sensor
R73002	RENO-REMOTE-H	Remote Control for Standalone Sensors (With Screen) Note: Only 1 needed per project.
R73005	RENO-REMOTE-H-ECO	Remote Control for Standalone sensors (Without Screen) Note: Only 1 needed per project


ACCESSORIES – RENO SMART NLC SENSORS




R75001
 RENO-RS-JK-BPDN-12V
 Bluetooth 3.5mm Jack PIR
 Sensor for RENO Smart NLC
 System




R75002
 RENO-RS-JK-BMWM-12V
 Bluetooth 3.5mm Jack
 Microwave Sensor for RENO
 Smart NLC System



R75201
 RENO-RS-GW-BCNW
 Ceiling Mounted Gateway for
 RENO Smart NLC System

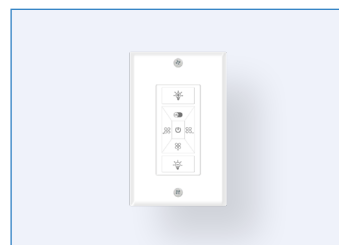

R75302
 RENO-RS-RC-BNNG
 7-Key Smart Wall Switch for
 RENO Smart NLC System




R75301
 RENO-RS-RC-BNNN
 5-Key Reset Remote Controller

Order#	Model	Description
R75001	RENO-RS-JK-BPDN-12V	Bluetooth 3.5mm Jack PIR Sensor for RENO Smart NLC System
R75002	RENO-RS-JK-BMWM-12V	Bluetooth 3.5mm Jack Microwave Sensor for RENO Smart NLC System
R75201	RENO-RS-GW-BCNW	Ceiling Mounted Gateway for RENO Smart NLC System
R75302	RENO-RS-RC-BNNG	7-Key Smart Wall Switch for RENO Smart NLC System
R75301	RENO-RS-RC-BNNN	5-Key Reset Remote Controller

DIMENSIONS

R1/R2

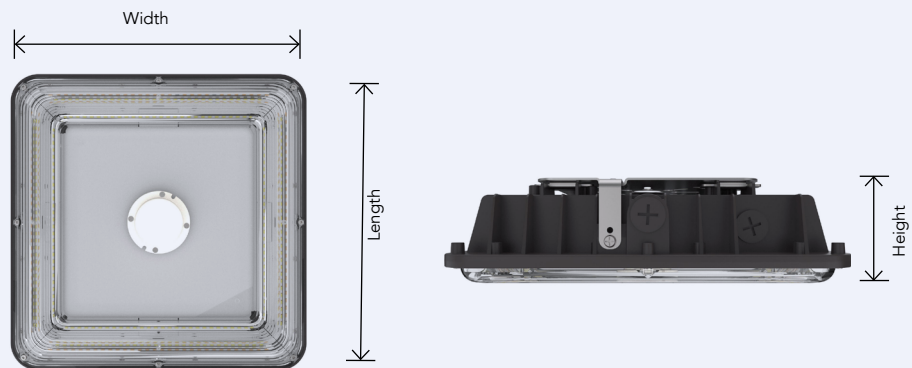

Length: 10.24" (260 mm)

Width: 10.24" (260 mm)

Height: 3.46" (88 mm)

Weight: 5.25 lbs (2.38 kg)