



ZETA Series

Aluminum Commercial Downlight



Date		Project	
Type		Part Number	

ARCHITECTURAL LUMINAIRES BY  RENO[™] LIGHTING

RENO Lighting's Aluminium Reflector Multifunctional Downlight is a high-performance, commercial-grade fixture designed for versatile lighting applications. The fixture includes adjustable wattages and color temperatures for tailored lighting, and supports both 0-10V and TRIAC dimming, providing flexible control options to meet a wide range of lighting needs.



Product Features

- Energy-Star, JA8 compliant
- Suitable for Type-IC on models: 4", 6", 8" & 10"
- Aluminum Can with Polycarbonate Lens
- External spring arms install to mounting surface without the need for a traditional recessed can
- Flexibility in Dimming Control: Supports both 0-10V and TRIAC dimming (120V)
- Damp location rated (Wet location under covered ceiling)
- Operating temperature: -4°F to 113°F
- Rated Lifetime L70(hrs): >50,000 (-20°C to 45°C)
- 10 year limited warranty

Key Specifications

Voltage	120-347V
Wattage	Selectable Wattage: 4" - 6/9/13W 6" - 10/16/27W 8" - 18/27/36W 10" - 20/30/40W
Efficacy	135 lm/W
CCT	Selectable: 27/30/35/40/5000K
CRI	>93
Lumens	Up to 3,720 lm
Beam Angle	89° & 97°
Dimming	0-10V & TRIAC 120V
Mounting	Recessed Ceiling
Applications	Office, Lobbies, Commercial, Retail Facilities





ZETA Series | Aluminum Commercial Downlight

ARCHITECTURAL LUMINAIRES BY  RENO[™]
LIGHTING

Specifications

Order#	Model	Size	Wattage	Voltage	Lumens	CCT	Beam
R36221	RENO-DL4-MW-DV-MCCT-AL	4.0"	6/9/13W	120V-347V	558/837/1,209 lm	27/30/35/40/5000K	89°
R36222	RENO-DL6-MW-DV-MCCT-AL	6.0"	10/16/27W	120V-347V	1,209/1,767/2,511 lm	27/30/35/40/5000K	97°
R36223	RENO-DL8-MW-DV-MCCT-AL	8.0"	18/27/36W	120V-347V	1,674/2,511/3,348 lm	27/30/35/40/5000K	97°
R36224	RENO-DL10-MW-DV-MCCT-AL	10.0"	20/30/40W	120V-347V	1,860/2,790/3,720 lm	27/30/35/40/5000K	97°

Accessories - Mounting



R39230
RENO-MP-DL-4N1
4in1 Mounting Plate



R39231
RENO-GF-DL-4
Goof Ring for 4" Commercial
Downlight



R39232
RENO-GF-DL-6
Goof Ring for 6" Commercial
Downlight



R39233
RENO-GF-DL-8
Goof Ring for 8" Commercial
Downlight



R39234
RENO-GF-DL-10
Goof Ring for 10" Commercial
Downlight

Order#	Model	Description
R39230	RENO-MP-DL-4N1	4 in 1 Mounting Plate
R39231	RENO-GF-DL-4	Goof Ring for 4" Commercial Downlight
R39232	RENO-GF-DL-6	Goof Ring for 6" Commercial Downlight
R39233	RENO-GF-DL-8	Goof Ring for 8" Commercial Downlight
R39234	RENO-GF-DL-10	Goof Ring for 10" Commercial Downlight






ZETA Series | Aluminum Commercial Downlight

ARCHITECTURAL LUMINAIRES BY  RENO[™] LIGHTING

Dimensions

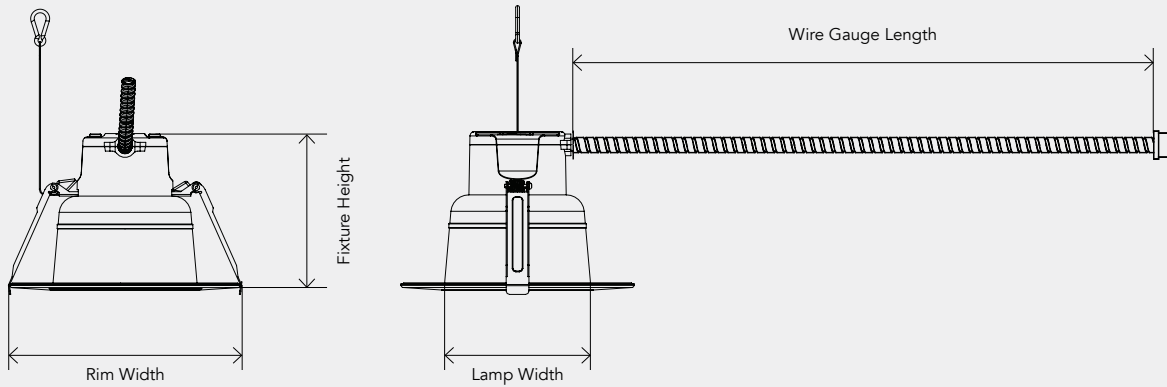

	4.0"	6.0"	8.0"	10.0"
Lamp Width Ø:	4.13" (105 mm)	5.36" (136 mm)	6.54" (166 mm)	7.45" (129 mm)
Rim Width Ø:	5.91" (150 mm)	8.27" (210 mm)	10.24" (260 mm)	11.22" (285 mm)
Fixture Height:	5.57" (141.5 mm)	5.62" (142.75 mm)	6.29" (160 mm)	6.76" (171.75 mm)
Wire Gauge Length:	25.59" (650 mm)	25.59" (650 mm)	25.59" (650 mm)	25.59" (650 mm)
Min. Cut-out Ø:	4.33" (110 mm)	5.91" (150 mm)	7.48" (190 mm)	8.27" (210 mm)
Max. Cut-out Ø:	5.51" (140 mm)	7.48" (190 mm)	9.45" (240 mm)	10.24" (260 mm)
Weight:	1.08 lbs (0.49 kg)	1.32 lbs (0.6 kg)	1.65 lbs (0.75 kg)	1.96 lbs (0.89 kg)

