




CINEMA Series

Up & Down Semi-Circle Wall Pack



The Cinema Series Up & Down Semi-Circle Wall Pack is widely used on wet location like storage warehouses, steel mills, toll booth, waiting rooms, the platforms of railway station.

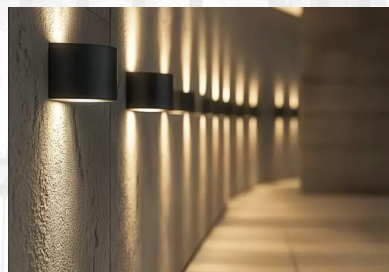

Product Features

- Aluminum Alloy Body
- Powder-Coated Black Finish
- Custom Colours Available
- Polycarbonate bottom Lens and Glass Upper Lens
- 0-10V Dimming
- DC photocell Built-in
- Waterproof rubber seal
- Mounted via Bracket
- Dip switch for CCT & down/full light control
- IP65 Wet Location rated
- Operating temp: -40°F to +113°F (-40°C to +45°C)
- Rated lifetime L70: >100,000 hours
- 10 year limited warranty

Key Specifications

| | |
|---------------------|---|
| Voltage | 120-347V |
| Wattage | R1 - 24/32/40W R2 - 48/64/80W |
| CCT | 3000/4000/5000K |
| CRI | 80 |
| Power Factor | >0.9 |
| Lumens | R1 - 5800-3480lm R2 - 11600-6960lm |
| Beam Angle | Type III |
| Application | Multi-Res, Event Halls, Theatres, Art Galleries, High-End Commercial Buildings, Architectural Driven Projects |
| Mounting | Wall mounting brackets (included) |





LUMAFLEX Series | Up & Down Semi-Circle Wall Pack

ARCHITECTURAL LUMINAIRES BY  **RENO**
LIGHTING


Specifications

| Order# | Model | Wattage | Voltage | Lumens | CCT | CRI |
|--------|--------------------------|-----------|----------|--------------------|-------------|-----|
| R51051 | RENO-UDSWP-MW-DV-MCCT-R1 | 24/32/40W | 120-347V | 3480/4640/5800lm | 30/40/5000K | 80 |
| R51052 | RENO-UDSWP-MW-DV-MCCT-R2 | 48/64/80W | 120-347V | 6960/9280/11,600lm | 30/40/5000K | 80 |

Certifications

| Order# | Model | Application | DLC Standard | DLC Premium |
|--------|--------------------------|---|--------------|-------------|
| R51051 | RENO-UDSWP-MW-DV-MCCT-R1 | Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires | – | S-9MS856 |
| R51052 | RENO-UDSWP-MW-DV-MCCT-R2 | Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires | – | S-FRVTD7 |

Light Option

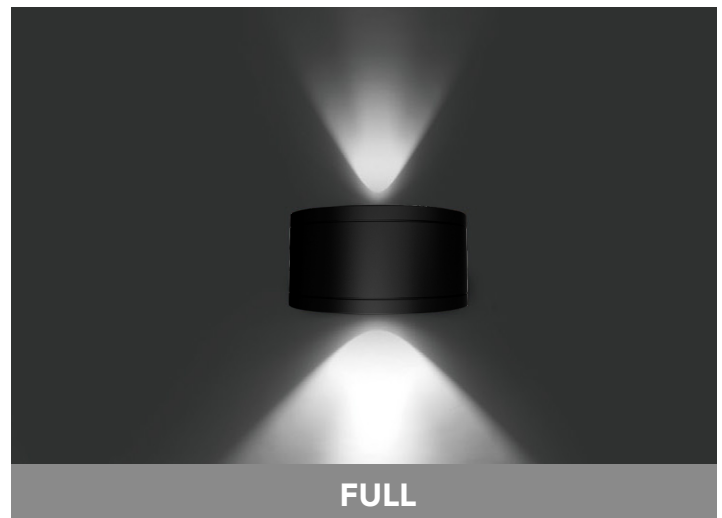



LUMAFLEX Series | Up & Down Semi-Circle Wall Pack

ARCHITECTURAL LUMINAIRES BY RENO LIGHTING

Accessories - Emergency Driver



R83010
RENO-EM-EX15
All weather emergency LED Driver

| Order# | Model | Description |
|--------|--------------|---|
| R83010 | RENO-EM-EX15 | External Mount ALL WEATHER EMERGENCY LED DRIVER |

Dimensions

R1

Width: 13" (330 mm)
Height: 6.5" (165mm)
Length: 6.5" (165 mm)
Weight: 7.4 lbs (3.4 kg)

R2

Width: 13" (330 mm)
Height: 6.5" (165mm)
Length: 6.5" (165 mm)
Weight: 7.6 lbs (3.4 kg)