



CINEMA Series


Up & Down Semi-Circle Wall Pack



Date		Project	
Type		Part Number	

ARCHITECTURAL LUMINAIRES BY  RENO[™] LIGHTING

The Cinema Series Up & Down Semi-Circle Wall Pack is widely used on wet location like storage warehouses, steel mills, toll booth, waiting rooms, the platforms of railway station.

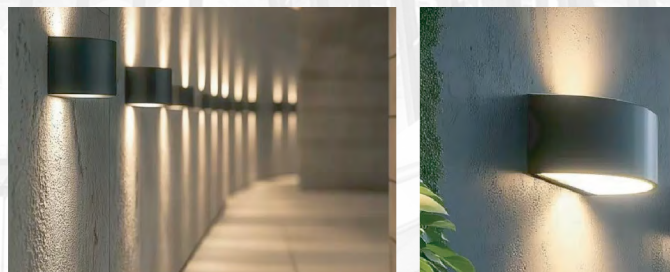

Product Features

- Aluminum Alloy Body
- Powder-Coated Black Finish
- Custom Colours Available
- Polycarbonate bottom Lens and Glass Upper Lens
- 0-10V Dimming
- In Full Mode, the fixture directs 10% of its light upward and 90% downward.
- DC photocell Built-in
- Waterproof rubber seal
- Mounted via Bracket
- Dip switch for CCT & down/full light control
- IP65 Wet Location rated
- Operating temp: -40°F to +113°F (-40°C to +45°C)
- Rated lifetime L70: >100,000 hours
- 10 year limited warranty

Key Specifications

Voltage	120-347V
Wattage	R1 - 24/32/40W R2 - 48/64/80W
CCT	3000/4000/5000K
CRI	80
Power Factor	>0.9
Lumens	R1 - 5800-3480lm R2 - 11600-6960lm
Beam Angle	Type III
Application	Multi-Res, Event Halls, Theatres, Art Galleries, High-End Commercial Buildings, Architectural Driven Projects
Mounting	Wall mounting brackets (included)





LUMAFLEX Series | Up & Down Semi-Circle Wall Pack

ARCHITECTURAL LUMINAIRES BY  RENO[™]
LIGHTING


Specifications

Order#	Model	Wattage	Voltage	Lumens	CCT	CRI
R51051	RENO-UDSWP-MW-DV-MCCT-R1	24/32/40W	120-347V	3480/4640/5800lm	30/40/5000K	80
R51052	RENO-UDSWP-MW-DV-MCCT-R2	48/64/80W	120-347V	6960/9280/11,600lm	30/40/5000K	80

Certifications

Order#	Model	Application	DLC Standard	DLC Premium
R51051	RENO-UDSWP-MW-DV-MCCT-R1	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	–	S-9MS856
R51052	RENO-UDSWP-MW-DV-MCCT-R2	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	–	S-FRVTD7

Light Option

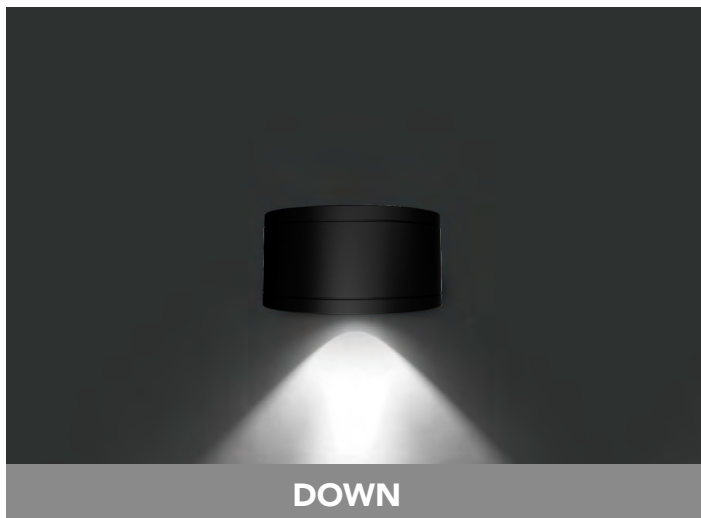




LUMAFLEX Series | Up & Down Semi-Circle Wall Pack

ARCHITECTURAL LUMINAIRES BY  **RENO**
LIGHTING

Dimensions

R1

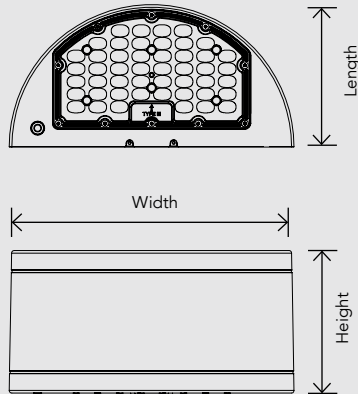


Width: 13" (330 mm)

Height: 6.5" (165mm)

Length: 6.5" (165 mm)

Weight: 7.4 lbs (3.4 kg)

R2

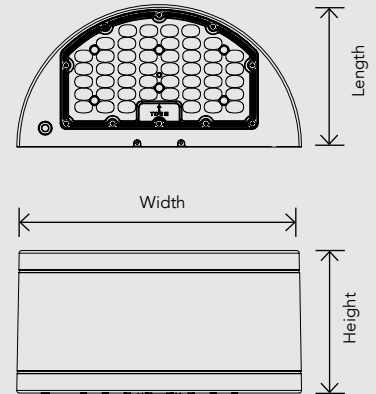

Width: 13" (330 mm)

Height: 6.5" (165mm)

Length: 6.5" (165 mm)

Weight: 7.6 lbs (3.4 kg)

