

Date		Project	
Type		Part Number	

EMERGENCY Series

Emergency Dual Light

RENO-EBU2W-2 Dual Head LED Emergency Light is constructed of high-impact ABS Thermoplastic. This sleek new design comes equipped for simple wall or ceiling mount installation. Adjustable 2 x 2W LED heads can be properly directed where illumination is required.



PRODUCT FEATURES

- LED Heads operate in DC mode
- AC charging operation with DC Battery Back-up
- Push Button test switch
- Suitable for damp locations
- Operating Temperature: 50°F - 104°F (10°C - 40°C)
- 5 year warranty


KEY SPECIFICATIONS

Voltage	120-347VDC
Head Wattage	2 x 2W
Lumens	2 x 155 lm
Discharge Time	>120 Minutes
Recharge Time	24 Hours
Material	ABS Thermoplastic Body, PC Lens
Mounting	Wall and Ceiling
Applications	Commercial, Warehouse, Retail Facilities

SPECIFICATIONS

Order#	Model	Wattage	Voltage	Lumens
R61203	RENO-EBU2W-2	2 x 2W	120-347VDC	2 x 155 lm

DIMENSIONS

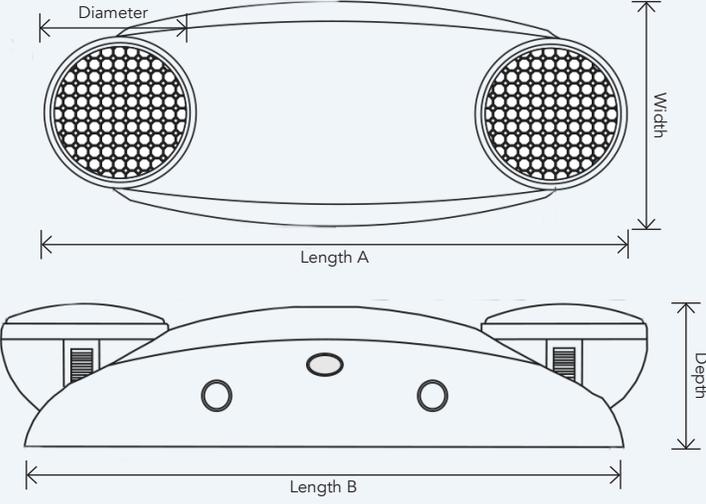

Technical drawing showing the dimensions of the emergency dual light. The drawing includes a top view and a side view. The top view shows two circular light lenses with a diameter of 3.5 inches (88.9 mm). The overall width of the light is 4.56 inches (116 mm). The length of the light is 11.02 inches (280 mm). The side view shows the depth of the light is 2.67 inches (68 mm). The length of the light is 10.15 inches (258 mm).

Width: 4.56" (116 mm)
 Diameter: 3.5" (88.9 mm)
 Length A: 11.02" (280 mm)
 Length B: 10.15" (258 mm)
 Depth: 2.67" (68 mm)