

SQUARE GIMBAL INSTALLATION INSTRUCTION

INSTRUCTIONS FOR THE FOLLOWING FIXTURES

Order	Model
R36125	RENO-LED-35-S12W-5CCT-WH-SQ
R36126	RENO-LED-35-S12W-5CCT-BK-SQ
R36127	RENO-LED-35-24W-FG-5CCT-WH-SQ
R36128	RENO-LED-35-24W-FG-5CCT-BK-SQ

⚠ WARNING

TURN THE POWER OFF FROM ELECTRICAL PANEL BEFORE INSTALLATION OR MAINTENANCE.

- DO NOT MODIFY THIS FIXTURE. ANY MODIFICATIONS MAY RENDER THE PRODUCT UNSAFE AND VOID WARRANTY.
- THIS PRODUCT IS SUITABLE FOR WET LOCATIONS

FIXTURE INSTALLATION

STEP 1. Measure distance from walls and mark position of fixture to be installed on the the ceiling.

STEP 2. Carefully scribe hole template in accordance to cut hole size on desired location.

STEP 3. Carefully cut hole in ceiling. (Fig. 1)

STEP 4. Electrical connections.







STEP 5. Select Color Temperature




STEP 6. Connect hardwire box to engine by connecting the quick male and female connector. (Fig. 2)

STEP 7. Pass the hardwire box and attached bx cable through the hole and place on straight surface inside the ceiling cavity. (Fig. 3)

STEP 8. Push the spring clip up towards the LED engine. (Fig. 4)

STEP 9. Push the fixture through the hole until the trim is flush with the ceiling. Spring clip will retrat to hold trim in place.

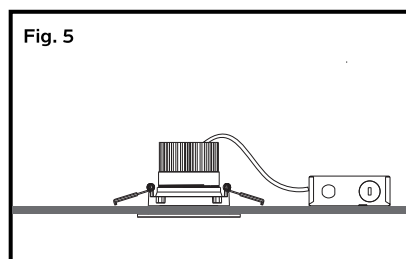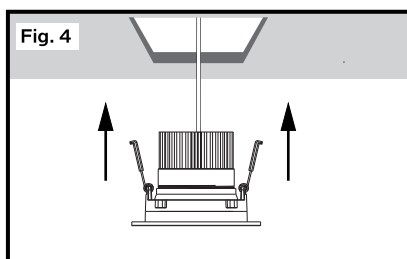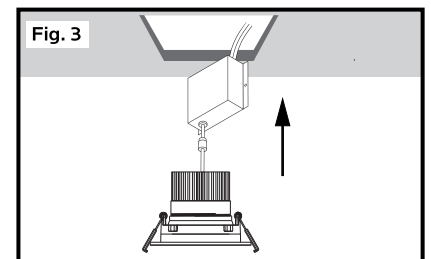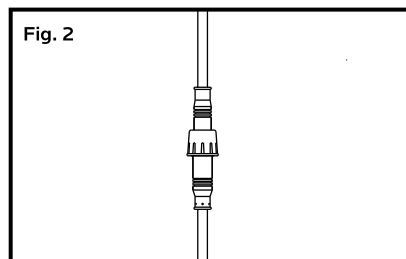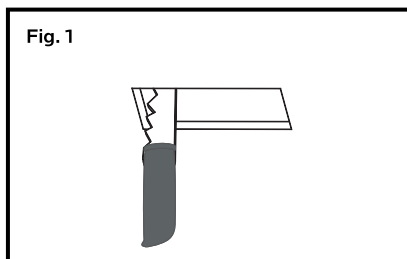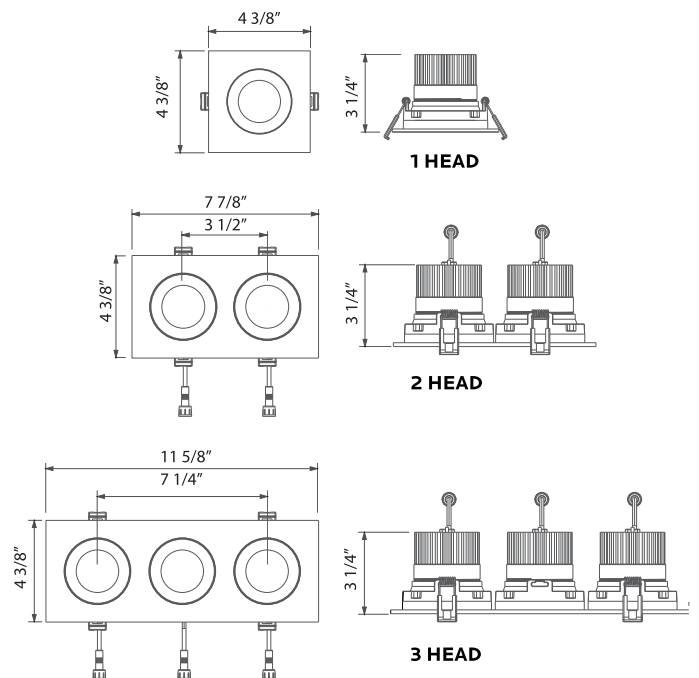

- 1 HEAD**  Cutout: 3.75" (95 mm)
- 2 HEAD**  Cutout: 7.25" x 3.75" (185 mm x 95 mm)
- 3 HEAD**  Cutout: 10.82" x 3.75" (275 mm x 95 mm)