Date: _____ Project: _____

Type: _____ Part #: _____



ZETA Series

Square Commercial Downlight

The Prime Square Commercial Downlight is a versatile, economical LED solution designed for maximum site flexibility. Available in 4", 6", and 8" configurations, it features field-selectable wattage and CCT, with 90 CRI for enhanced color quality.

With universal 120–347V compatibility, it delivers reliable performance and adaptability across a wide range of commercial applications.

Product Features

- Built-in Selectable Wattage & CCT: Maximizes SKU reduction
- Perfect for new construction, remodels, and retrofit projects.
- Sleek Modern Aesthetic: Smooth reflector trim creates a clean, architectural finish that elevates any ceiling line.
- IC-Rated Safety: Safe for direct contact with ceiling insulation.
- Heavy-duty ADC12 die-cast aluminum for optimal heat dissipation and long life.
- Visual Comfort: Deep reflector minimizes glare for smooth, uniform light.
- Canless Spring Mount: Fast ceiling install with spring clips—no housing required.
- Universal Driver: 120–347V with 3-in-1 dimming.
- Rated Lifespan: L70 ~ 100,000 Hrs
- 5 Year warranty

Specifications

Voltage	120-347V AC
Selectable Wattage	4": 8/10/14/16W (16W Default) 6": 15/18/22/26/30W (30W Default) 8": 15/20/25/30/35W (35W Default)
Selectable CCT	27/30/35/40/50K (5000K Default)
Power factor	>0.9
CRI	90
Lumen	Up to 3,924 lm/W
Efficacy	Up to 129 lm/W
Beam Angle	90°
Dimming	0-10V, 120V TRIAC, and ELV
Mounting	Recessed
Applications	Commercial buildings, Hospitality, Offices, Lobbies

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

Prime Square Commercial Downlight 4" White

Order #	Model	Watt	Lumens	Efficacy	CCT
R36230	RENO-DL4-MW-DV-MCCT-SQ-WH	8W	875.9 lm	109.4 lm/W	2700K
			917.1 lm	114.6 lm/W	3000K
			917.1 lm	114.6 lm/W	3500K
			917.1 lm	114.6 lm/W	4000K
			968.5 lm	121.0 lm/W	5000K
		10W	1039.7 lm	103.9 lm/W	2700K
			1087.8 lm	108.7 lm/W	3000K
			1087.8 lm	108.7 lm/W	3500K
			1087.8 lm	108.7 lm/W	4000K
			1140.8 lm	114.0 lm/W	5000K
		14W	1410.3 lm	100.7 lm/W	2700K
			1473.0 lm	105.2 lm/W	3000K
			1473.0 lm	105.2 lm/W	3500K
			1473.0 lm	105.2 lm/W	4000K
			1549.5 lm	110.6 lm/W	5000K
		16W	1600.9 lm	100.0 lm/W	2700K
			1687.6 lm	105.4 lm/W	3000K
			1687.6 lm	105.4 lm/W	3500K
			1687.6 lm	105.4 lm/W	4000K
			1784.3 lm	111.5 lm/W	5000K

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

Prime Square Commercial Downlight 4" Black

Order #	Model	Watt	Lumens	Efficacy	CCT
R36231	RENO-DL4-MW-DV-MCCT-SQ-BK	8W	678.2 lm	84.7 lm/W	2700K
			700.0 lm	87.5 lm/W	3000K
			710.6 lm	88.8 lm/W	3500K
			719.9 lm	89.9 lm/W	4000K
			749.5 lm	93.6 lm/W	5000K
		10W	804.9 lm	80.4 lm/W	2700K
			832.1 lm	83.2 lm/W	3000K
			843.2 lm	84.3 lm/W	3500K
			852.3 lm	85.2 lm/W	4000K
			888.3 lm	88.8 lm/W	5000K
		14W	1103.6 lm	78.8 lm/W	2700K
			1135.7 lm	81.1 lm/W	3000K
			1146.9 lm	81.9 lm/W	3500K
			1156.7 lm	82.6 lm/W	4000K
			1222.0 lm	87.2 lm/W	5000K
		16W	1198.4 lm	74.9 lm/W	2700K
			1228.6 lm	76.7 lm/W	3000K
			1261.6 lm	78.8 lm/W	3500K
			1316.2 lm	82.2 lm/W	4000K
			1376.1 lm	86.0 lm/W	5000K

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

Prime Square Commercial Downlight 6" White

Order #	Model	Watt	Lumens	Efficacy	CCT
R36232	RENO-DL6-MW-DV-MCCT-SQ-WH	15W	1526.6 lm	101.7 lm/W	2700K
			1558.7 lm	103.9 lm/W	3000K
			1616.5 lm	107.7 lm/W	3500K
			1668.0 lm	111.2 lm/W	4000K
			1738.3 lm	115.8 lm/W	5000K
		18W	1927.3 lm	107.0 lm/W	2700K
			2001.8 lm	111.2 lm/W	3000K
			2021.6 lm	112.3 lm/W	3500K
			2042.7 lm	113.4 lm/W	4000K
			2135.7 lm	118.6 lm/W	5000K
		22W	2213.5 lm	100.6 lm/W	2700K
			2270.8 lm	103.2 lm/W	3000K
			2356.1 lm	107.0 lm/W	3500K
			2423.0 lm	110.1 lm/W	4000K
			2527.7 lm	114.8 lm/W	5000K
		26W	2721.9 lm	104.6 lm/W	2700K
			2857.1 lm	109.8 lm/W	3000K
			2876.7 lm	110.6 lm/W	3500K
			2891.5 lm	111.2 lm/W	4000K
			3017.7 lm	116.0 lm/W	5000K
		30W	2894.3 lm	96.4 lm/W	2700K
			2987.0 lm	99.5 lm/W	3000K
			3099.6 lm	103.3 lm/W	3500K
			3195.6 lm	106.5 lm/W	4000K
			3348.1 lm	111.6 lm/W	5000K

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

Prime Square Commercial Downlight 6" Black

Order #	Model	Watt	Lumens	Efficacy	CCT
R36233	RENO-DL6-MW-DV-MCCT-SQ-BK	15W	1343.8 lm	89.5 lm/W	2700K
			1407.5 lm	93.8 lm/W	3000K
			1423.6 lm	94.9 lm/W	3500K
			1441.9 lm	96.1 lm/W	4000K
			1530.7 lm	102.0 lm/W	5000K
		18W	1598.0 lm	88.7 lm/W	2700K
			1675.1 lm	93.0 lm/W	3000K
			1699.7 lm	94.4 lm/W	3500K
			1718.8 lm	95.4 lm/W	4000K
			1810.2 lm	100.5 lm/W	5000K
		22W	1922.0 lm	87.3 lm/W	2700K
			2017.1 lm	91.6 lm/W	3000K
			2033.0 lm	92.4 lm/W	3500K
			2051.1 lm	93.2 lm/W	4000K
			2184.1 lm	99.2 lm/W	5000K
		26W	2268.7 lm	87.2 lm/W	2700K
			2347.0 lm	90.2 lm/W	3000K
			2364.5 lm	90.9 lm/W	3500K
			2381.4 lm	91.5 lm/W	4000K
			2552.6 lm	4.0 lm/W	5000K
		30W	2601.7 lm	86.7 lm/W	2700K
			2618.9 lm	87.2 lm/W	3000K
			2680.2 lm	89.3 lm/W	3500K
			2734.8 lm	91.1 lm/W	4000K
			2833.3 lm	94.4 lm/W	5000K

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

Prime Square Commercial Downlight 8" White

Order #	Model	Watt	Lumens	Efficacy	CCT
R36234	RENO-DL8-MW-DV-MCCT-SQ-WH	15W	1742.0 lm	116.1 lm/W	2700K
			1807.5 lm	120.5 lm/W	3000K
			1823.8 lm	121.5 lm/W	3500K
			1841.0 lm	122.7 lm/W	4000K
			1931.8 lm	128.7 lm/W	5000K
		20W	2242.4 lm	112.1 lm/W	2700K
			2362.7 lm	118.1 lm/W	3000K
			2380.2 lm	119.0 lm/W	3500K
			2397.4 lm	119.8 lm/W	4000K
			2481.5 lm	124.0 lm/W	5000K
		25W	2773.8 lm	110.9 lm/W	2700K
			2913.6 lm	116.5 lm/W	3000K
			2936.8 lm	117.4 lm/W	3500K
			2949.3 lm	117.9 lm/W	4000K
			3048.0 lm	121.9 lm/W	5000K
		30W	3247.4 lm	108.2 lm/W	2700K
			3451.9 lm	115.0 lm/W	3000K
			3476.4 lm	115.8 lm/W	3500K
			3492.8 lm	116.4 lm/W	4000K
			3610.0 lm	120.3 lm/W	5000K
		35W	3567.0 lm	101.9 lm/W	2700K
			3797.8 lm	108.5 lm/W	3000K
			3814.9 lm	108.9 lm/W	3500K
			3831.7 lm	109.4 lm/W	4000K
			3924.6 lm	112.1 lm/W	5000K

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.


Prime Square Commercial Downlight 8" Black

Order #	Model	Watt	Lumens	Efficacy	CCT
R36235	RENO-DL8-MW-DV-MCCT-SQ-BK	15W	1572.0 lm	104.8 lm/W	2700K
			1639.7 lm	109.3 lm/W	3000K
			1657.4 lm	110.4 lm/W	3500K
			1674.8 lm	111.6 lm/W	4000K
			1619.1 lm	107.9 lm/W	5000K
		20W	2034.6 lm	101.7 lm/W	2700K
			2137.4 lm	106.8 lm/W	3000K
			2154.4 lm	107.7 lm/W	3500K
			2171.8 lm	108.5 lm/W	4000K
			2117.2 lm	105.8 lm/W	5000K
		25W	2503.6 lm	100.1 lm/W	2700K
			2649.5 lm	105.9 lm/W	3000K
			2666.0 lm	106.6 lm/W	3500K
			2683.7 lm	107.3 lm/W	4000K
			2647.0 lm	105.8 lm/W	5000K
		30W	2947.4 lm	98.2 lm/W	2700K
			3139.7 lm	104.6 lm/W	3000K
			3156.2 lm	105.2 lm/W	3500K
			3175.4 lm	105.8 lm/W	4000K
			3171.6 lm	105.7 lm/W	5000K
		35W	3252.8 lm	92.9 lm/W	2700K
			3275.9 lm	93.5 lm/W	3000K
			3420.6 lm	97.7 lm/W	3500K
			3546.3 lm	101.3 lm/W	4000K
			3584.8 lm	102.4 lm/W	5000K

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.


Accessories

Emergency & Mounting



Emergency LED Driver

R83000
RENO-EM-H08



Three-in-one Mounting Plate


R39235
RENO-MP-DL-3N1-SQ

Order #	Model	Description
R83000	RENO-EM-H08	External Mount | 8W | 100-347Vac | 50/60Hz | 0.1A max | 12W max | 170V DC | 5°C ~50°C
R39235	RENO-MP-DL-3N1-SQ	Three-in-one Mounting Plate for 4/6/8" Square Commercial Downlight

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

Dimensions


Square Commercial Downlight 4”

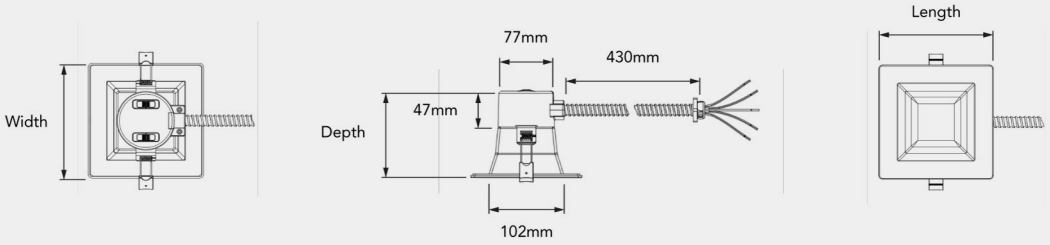

Order #	Model	Length	Width	Depth	Weight
R36230	RENO-DL4-MW-DV-MCCT-SQ-WH	6” (152 mm)	6” (152 mm)	4.4” (112 mm)	1.26lbs (0.57kg)
R36231	RENO-DL4-MW-DV-MCCT-SQ-BK	6” (152 mm)	6” (152 mm)	4.4” (112 mm)	1.26lbs (0.57kg)

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.


Square Commercial Downlight 6”

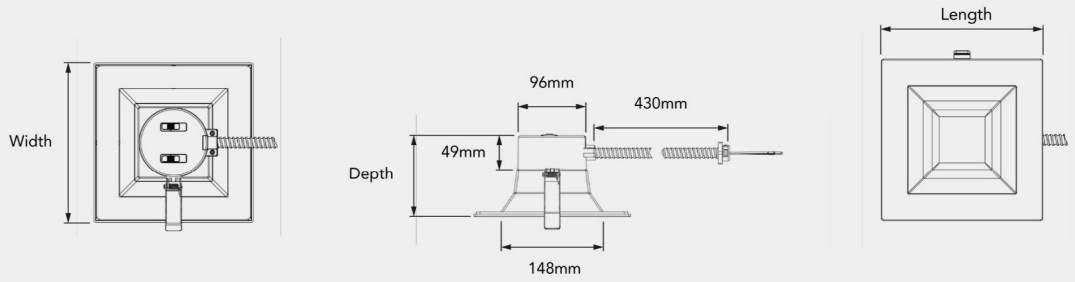

Order #	Model	Length	Width	Depth	Weight
R36232	RENO-DL6-MW-DV-MCCT-SQ-WH	8.7” (220 mm)	8.7” (220 mm)	4.5” (115 mm)	1.94lbs (0.88kg)
R36233	RENO-DL6-MW-DV-MCCT-SQ-BK	8.7” (220 mm)	8.7” (220 mm)	4.5” (115 mm)	1.94lbs (0.88kg)

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

Square Commercial Downlight 8”

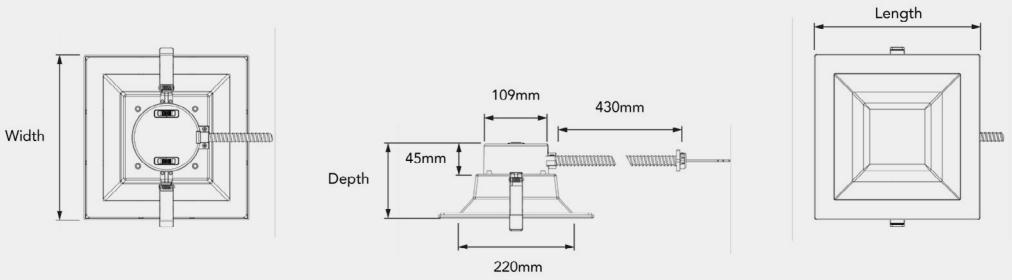

Order #	Model	Length	Width	Depth	Weight
R36234	RENO-DL8-MW-DV-MCCT-SQ-WH	10.2” (260 mm)	10.2” (260 mm)	4.2” (107 mm)	2.43lbs (1.1kg)
R36235	RENO-DL8-MW-DV-MCCT-SQ-BK	10.2” (260 mm)	10.2” (260 mm)	4.2” (107 mm)	2.43lbs (1.1kg)

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.