


Installation Procedure

WARNING ⚡

1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.
3. Professional electrician for installation and maintenance only.




Turn Off power supply before starting any installation. Read instructions & check you have all the tools & accessories to complete the installation correctly.

Mounting location: Wall mounted or Eave mounted.

Installation height: Recommended installation height is 6ft to 10ft, the actual sensing range may vary with altitude.


Step 1

Take out the light fixture, loosen the screw in the middle of lamp base, and take out the plastic cover

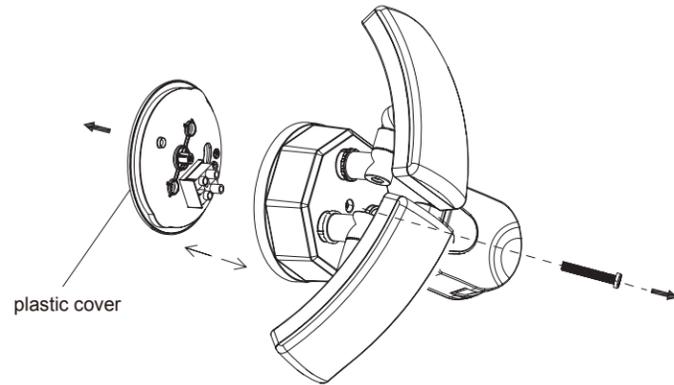


Step 1

Connect Earth wire by using wire nuts, remaining wires to be pass through the hole of circle crossbar. Install the circle crossbar to junction box with screws.

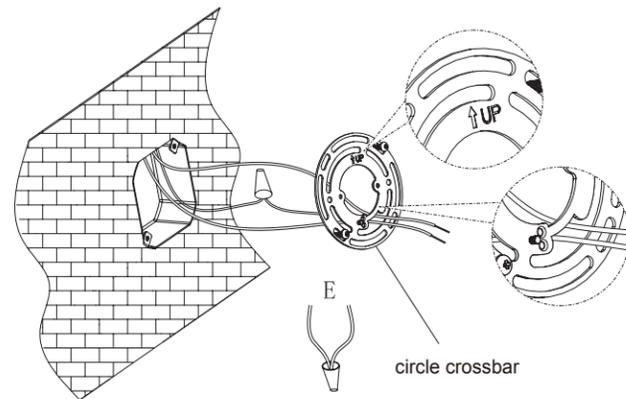

Step 3


Wires to be pass through the hole of plastic cover. Install the plastic cover to circle crossbar with screws.

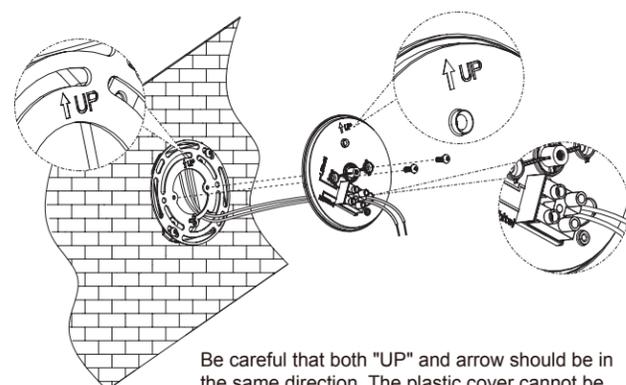

Be careful that both "UP" and arrow should be in the same direction. The plastic cover cannot be rotated to avoid wires damage.


Step 4

Insert the AC wires into the side of the terminal block and tighten terminal block screws.

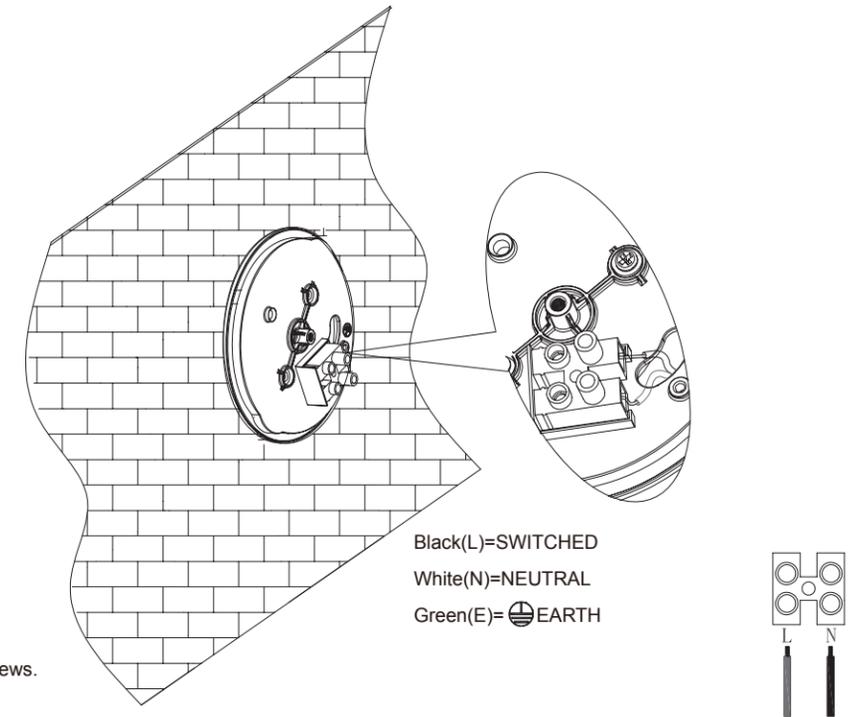

Step 5

Choose a preferred color temp. by slide switch if with CCT selected function.

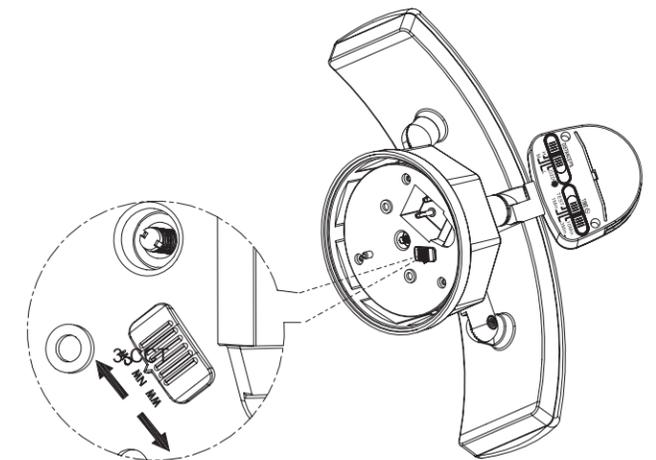

Step 6

Loosen the screws on the swing arm, adjust the required light direction, and then lock the screws on the swing arm.

