


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.4V I:0.1746A P:20.85W PF:0.9916 Lamp Flux:2547.99x1 lm		
NAME: MSS4-20/30/40/347/D10/W/35-40-50	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 122.23 lm/W			
MODEL	5000K	I _{max} (cd)	763.9	S/MH(C0/180)	1.25
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.35
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2548.0	η UP,DN(C0-180)	0.0,47.5
NOMINAL FLUX(lm)	2547.99	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,52.5
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	η down(%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

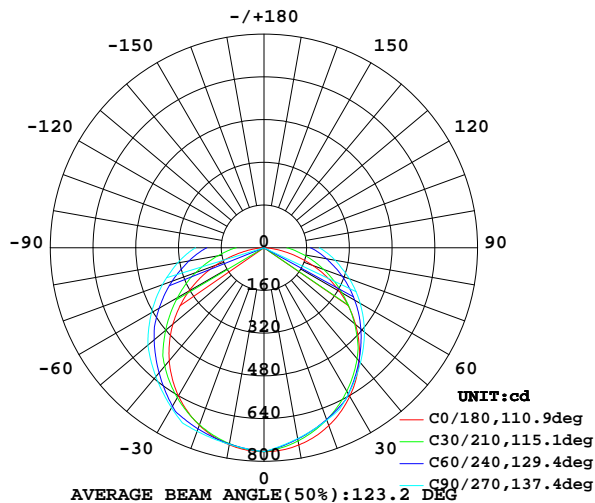

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

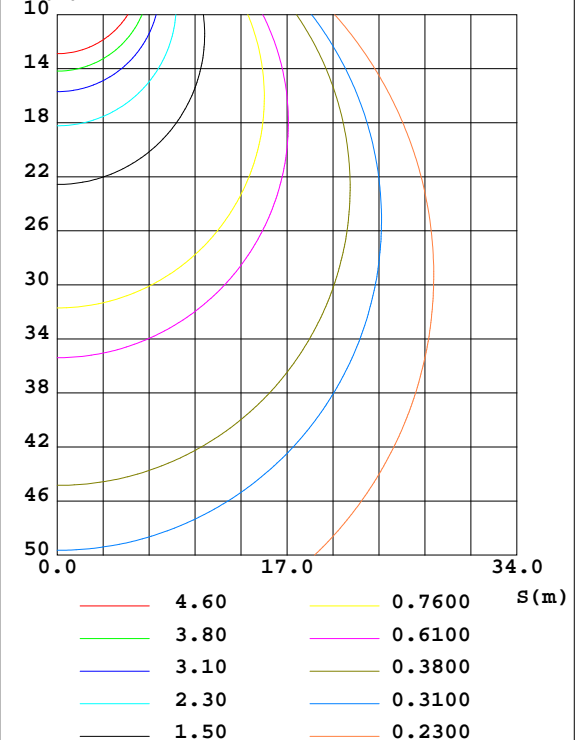

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-04-29

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	$\%lum, lamp$
5	760.7	748.8	744.7	748.3	760.3	756.1	755.7	756.6	0- 5	18.10	18.10	0.71,0.71
10	750.2	730.4	725.6	729.7	749.6	745.3	747.7	745.9	5- 10	53.38	71.49	2.81,2.81
15	732.8	708.4	706.5	707.6	731.7	730.8	739.7	731.5	10- 15	86.69	158.2	6.21,6.21
20	709.1	683.8	687.4	682.4	707.5	713.3	731.7	714.4	15- 20	117.3	275.5	10.8,10.8
25	678.8	656.6	668.3	654.8	676.9	692.7	723.6	694.3	20- 25	144.8	420.3	16.5,16.5
30	642.4	627.1	632.9	624.8	640.5	669.9	692.5	671.7	25- 30	167.9	588.2	23.1,23.1
35	601.1	591.9	597.5	589.4	598.9	639.5	661.3	641.4	30- 35	185.2	773.4	30.4,30.4
40	554.4	547.1	562.1	544.4	552.1	596.0	630.1	598.1	35- 40	197.0	970.4	38.1,38.1
45	503.1	501.7	526.7	499.0	500.8	551.7	598.9	553.6	40- 45	203.3	1174	46.1,46.1
50	447.9	456.0	491.4	453.4	445.5	507.2	567.8	509.1	45- 50	204.3	1378	54.1,54.1
55	388.6	410.9	453.6	408.5	386.4	463.4	527.1	465.1	50- 55	200.1	1578	61.9,61.9
60	326.1	366.4	415.9	364.1	323.9	419.4	486.4	420.9	55- 60	190.7	1769	69.4,69.4
65	261.1	321.6	378.2	319.3	259.0	370.1	445.8	371.6	60- 65	177.0	1946	76.4,76.4
70	194.7	278.5	340.5	276.1	192.7	323.0	405.1	324.5	65- 70	159.8	2106	82.6,82.6
75	129.0	237.3	302.7	234.9	127.4	278.0	364.4	279.6	70- 75	140.2	2246	88.1,88.1
80	68.21	198.8	270.8	196.3	66.92	236.1	328.4	237.5	75- 80	119.6	2366	92.8,92.8
85	20.39	166.3	238.8	164.3	19.57	199.9	292.4	201.0	80- 85	100.1	2466	96.8,96.8
90	0.4568	135.4	206.8	133.8	0.3827	165.8	256.4	166.4	85- 90	82.38	2548	100,100
95									90- 95			
100									95-100			
105									100-105			
110									105-110			
115									110-115			
120									115-120			
125									120-125			
130									125-130			
135									130-135			
140									135-140			
145									140-145			
150									145-150			
155									150-155			
160									155-160			
165									160-165			
170									165-170			
175									170-175			
180									175-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-04-29

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.00	.95	.90	.98	.93	.88	.93	.89	.86	.89	.86	.83	.86	.83	.80	.78
2.0	.86	.78	.71	.84	.77	.70	.80	.74	.69	.77	.72	.67	.74	.69	.65	.63
3.0	.75	.65	.58	.73	.65	.58	.70	.63	.57	.67	.61	.56	.64	.59	.55	.52
4.0	.66	.56	.49	.64	.55	.48	.62	.54	.48	.59	.52	.47	.57	.51	.46	.44
5.0	.58	.49	.42	.57	.48	.41	.55	.47	.41	.53	.46	.40	.51	.45	.40	.38
6.0	.52	.43	.36	.52	.42	.36	.50	.42	.36	.48	.41	.35	.46	.40	.35	.33
7.0	.47	.38	.32	.47	.38	.32	.45	.37	.31	.44	.36	.31	.42	.36	.31	.29
8.0	.43	.34	.28	.43	.34	.28	.41	.33	.28	.40	.33	.28	.39	.32	.28	.26
9.0	.40	.31	.25	.39	.31	.25	.38	.30	.25	.37	.30	.25	.36	.29	.25	.23
10.0	.37	.28	.23	.36	.28	.23	.35	.28	.23	.34	.27	.23	.33	.27	.22	.21

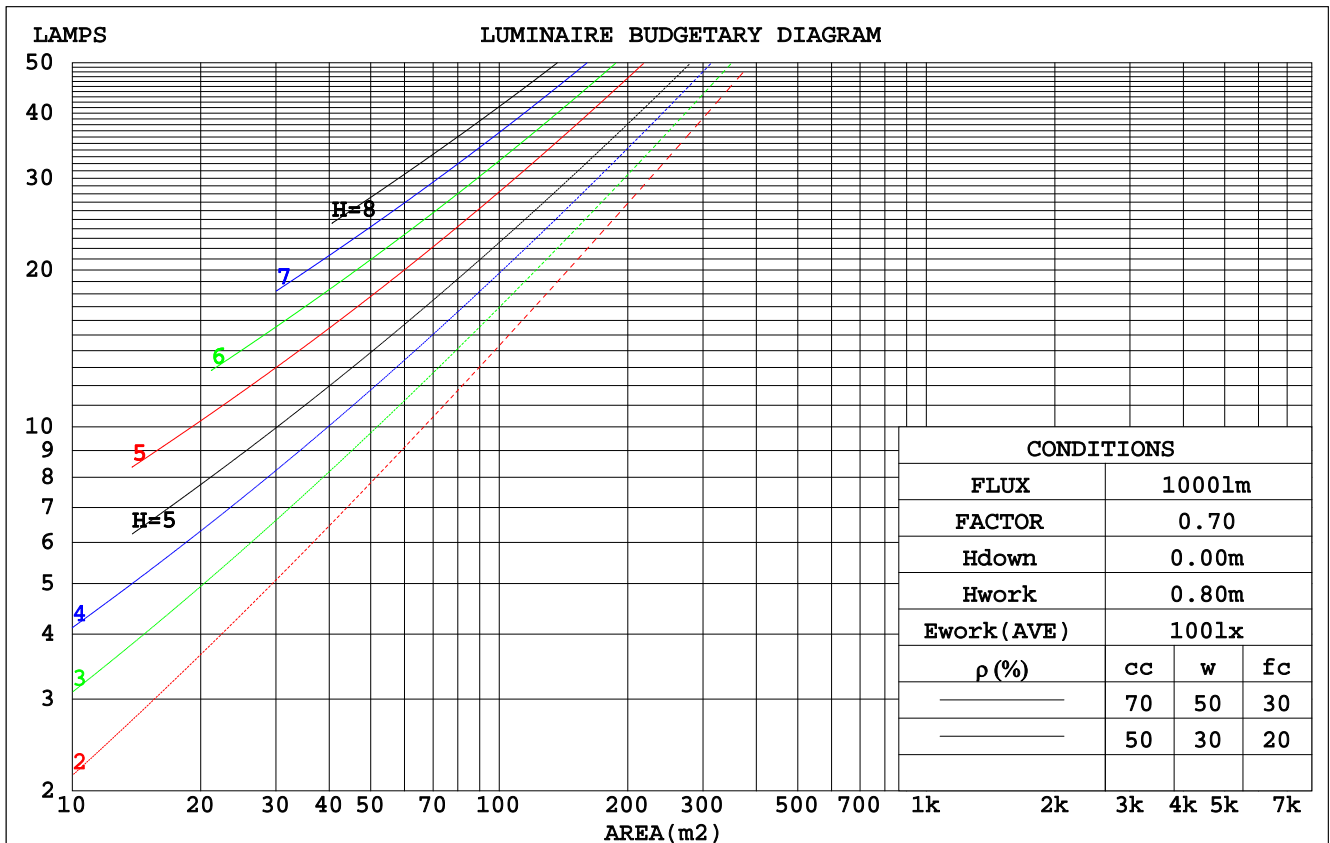

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-04-29

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.290
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks:

WEC AND CCEC

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.384	.218	.069	.376	.215	.068	.363	.208	.066	.350	.202	.065	.339	.196	.063	
2.0	.336	.184	.057	.330	.182	.056	.318	.177	.055	.306	.172	.054	.296	.167	.053	
3.0	.300	.160	.048	.295	.158	.047	.284	.154	.047	.274	.150	.046	.265	.147	.045	
4.0	.271	.141	.041	.266	.139	.041	.257	.136	.041	.248	.133	.040	.240	.130	.040	
5.0	.247	.126	.036	.242	.124	.036	.234	.122	.036	.226	.119	.035	.219	.117	.035	
6.0	.226	.114	.032	.222	.112	.032	.215	.110	.032	.208	.108	.032	.201	.106	.031	
7.0	.209	.103	.029	.206	.102	.029	.199	.101	.029	.193	.099	.029	.187	.097	.029	
8.0	.194	.095	.027	.191	.094	.027	.185	.092	.026	.179	.091	.026	.174	.089	.026	
9.0	.181	.087	.024	.178	.087	.024	.173	.085	.024	.168	.084	.024	.163	.083	.024	
10.0	.169	.081	.023	.167	.081	.022	.162	.079	.022	.158	.078	.022	.153	.077	.022	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.185	.155	.129	.159	.133	.111	.109	.092	.076	.062	.053	.044	.020	.017	.014	
2.0	.178	.132	.093	.153	.113	.080	.105	.078	.056	.060	.046	.033	.019	.015	.011	
3.0	.170	.114	.070	.146	.099	.061	.100	.069	.043	.058	.040	.025	.019	.013	.008	
4.0	.162	.101	.055	.139	.088	.048	.096	.061	.034	.055	.036	.020	.018	.012	.007	
5.0	.154	.091	.045	.132	.079	.039	.091	.055	.027	.053	.032	.016	.017	.011	.005	
6.0	.147	.083	.037	.126	.072	.032	.087	.050	.023	.050	.030	.014	.016	.010	.005	
7.0	.139	.076	.032	.120	.066	.028	.083	.046	.020	.048	.027	.012	.016	.009	.004	
8.0	.132	.070	.028	.114	.061	.024	.079	.043	.017	.046	.025	.010	.015	.008	.003	
9.0	.126	.065	.024	.108	.057	.021	.075	.040	.015	.044	.024	.009	.014	.008	.003	
10.0	.120	.061	.022	.103	.053	.019	.072	.037	.014	.042	.022	.008	.014	.007	.003	

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-04-29

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.290
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.4	22.0	20.7	22.3	22.5	21.6	23.2	21.9	23.4	23.6
3H	21.9	23.4	22.2	23.6	23.9	24.0	25.5	24.3	25.8	26.0
4H	22.4	23.9	22.7	24.1	24.4	25.3	26.8	25.6	27.0	27.3
6H	22.7	24.1	23.1	24.4	24.7	26.7	28.1	27.1	28.4	28.7
8H	22.8	24.1	23.2	24.4	24.7	27.5	28.9	27.9	29.2	29.5
12H	22.8	24.1	23.2	24.4	24.7	28.4	29.7	28.8	30.0	30.3
4H 2H	21.3	22.8	21.6	23.0	23.3	22.2	23.7	22.5	23.9	24.2
3H	23.0	24.3	23.4	24.6	24.9	24.9	26.2	25.2	26.5	26.8
4H	23.8	24.9	24.1	25.3	25.6	26.4	27.5	26.7	27.9	28.2
6H	24.3	25.3	24.7	25.7	26.1	28.0	29.1	28.4	29.5	29.8
8H	24.4	25.4	24.8	25.8	26.2	29.0	30.0	29.4	30.3	30.7
12H	24.5	25.4	24.9	25.8	26.2	30.0	31.0	30.5	31.3	31.8
8H 4H	24.6	25.6	25.0	26.0	26.4	26.7	27.7	27.1	28.1	28.5
6H	25.5	26.3	25.9	26.7	27.2	28.7	29.5	29.1	30.0	30.4
8H	25.8	26.6	26.3	27.0	27.5	29.8	30.6	30.3	31.0	31.5
12H	26.0	26.7	26.5	27.2	27.6	31.2	31.8	31.7	32.3	32.8
12H 4H	24.8	25.8	25.3	26.2	26.6	26.8	27.7	27.2	28.1	28.5
6H	25.9	26.7	26.4	27.1	27.6	28.8	29.6	29.3	30.0	30.5
8H	26.4	27.1	26.9	27.6	28.0	30.1	30.7	30.6	31.2	31.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.1 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 2548 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.2)

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-04-29

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	54	42	35	53	42	34	52	41	34	27
0.80	64	51	43	63	51	43	61	50	43	35
1.00	72	60	52	70	59	51	68	61	51	43
1.25	79	67	59	77	66	59	74	65	58	50
1.50	84	73	65	82	72	64	79	70	63	55
2.00	91	81	73	89	80	73	85	77	71	62
2.50	95	86	79	93	84	78	89	82	76	67
3.00	99	90	84	96	89	83	92	86	81	71
4.00	103	96	90	100	94	89	96	91	86	77
5.00	106	100	95	103	98	93	98	94	90	80
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-04-29

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.290
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Conical surface Flux(90deg):

1173.7 lm

%lum = 46.1%


%lamp = 46.1%

Conical surface Flux(120deg):

1768.9 lm

%lum = 69.4%


%lamp = 69.4%

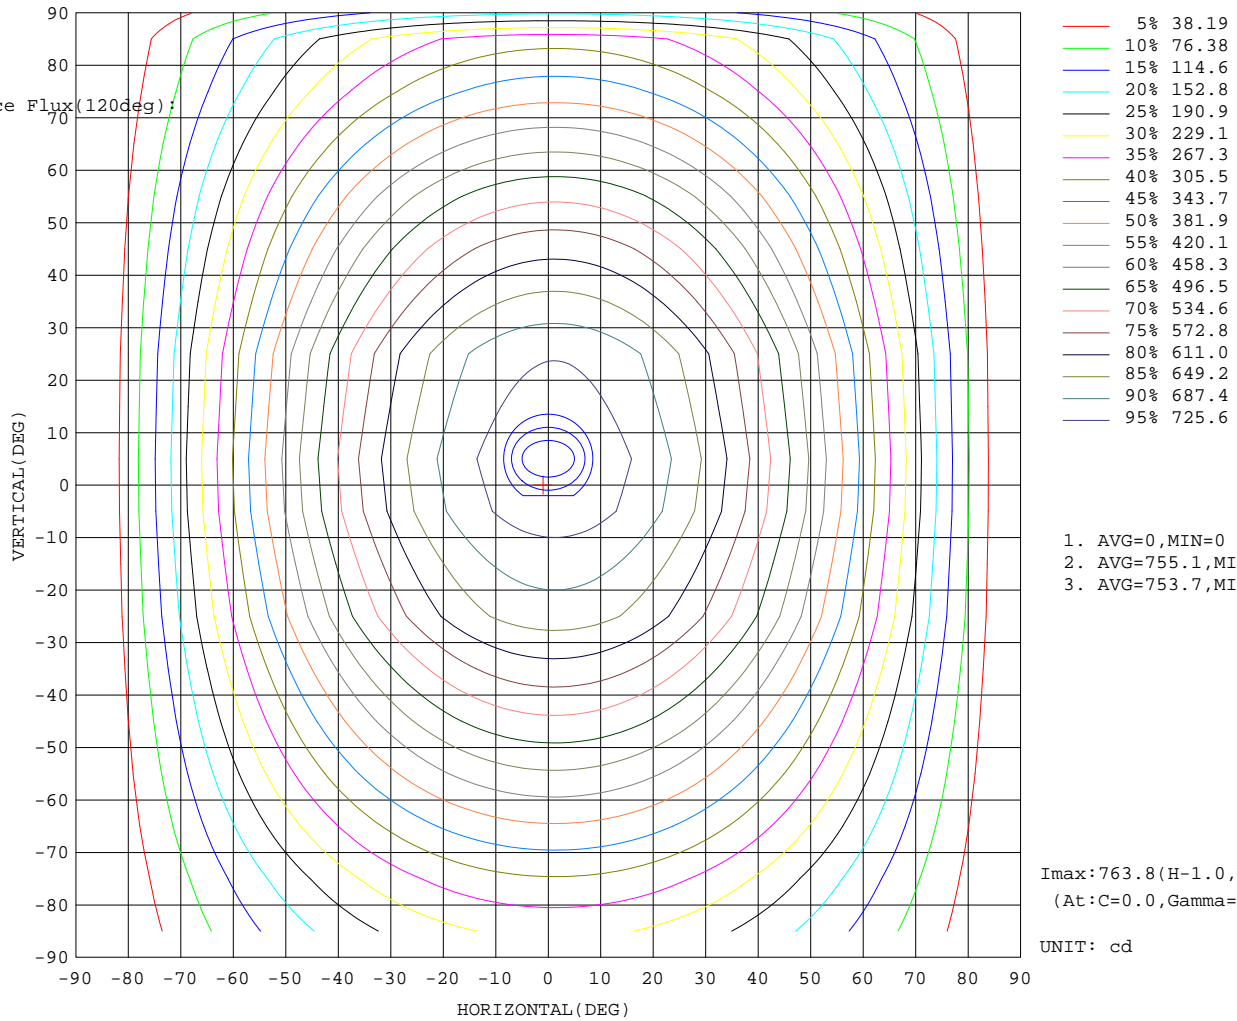

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-04-29

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

AAI Figure

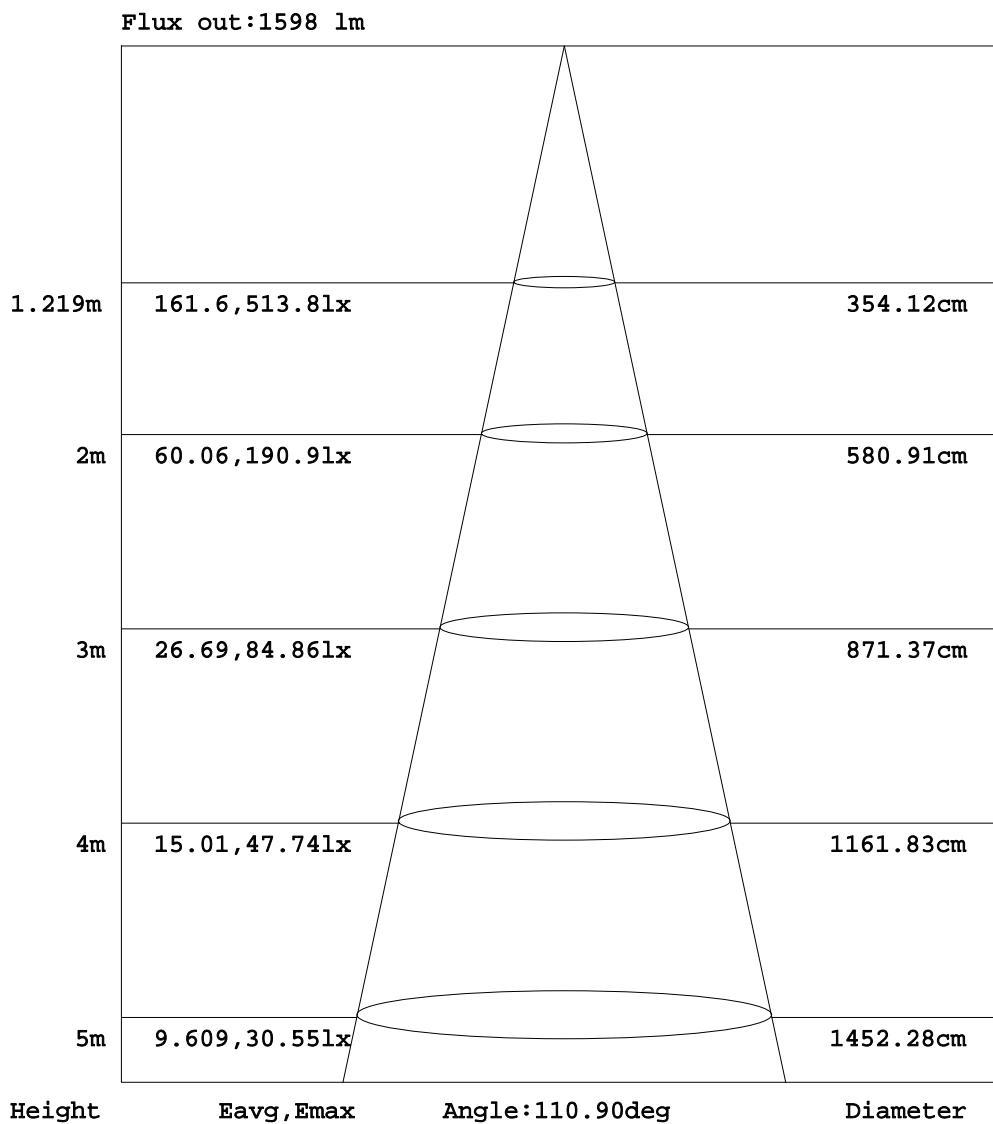


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-04-29

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.290
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

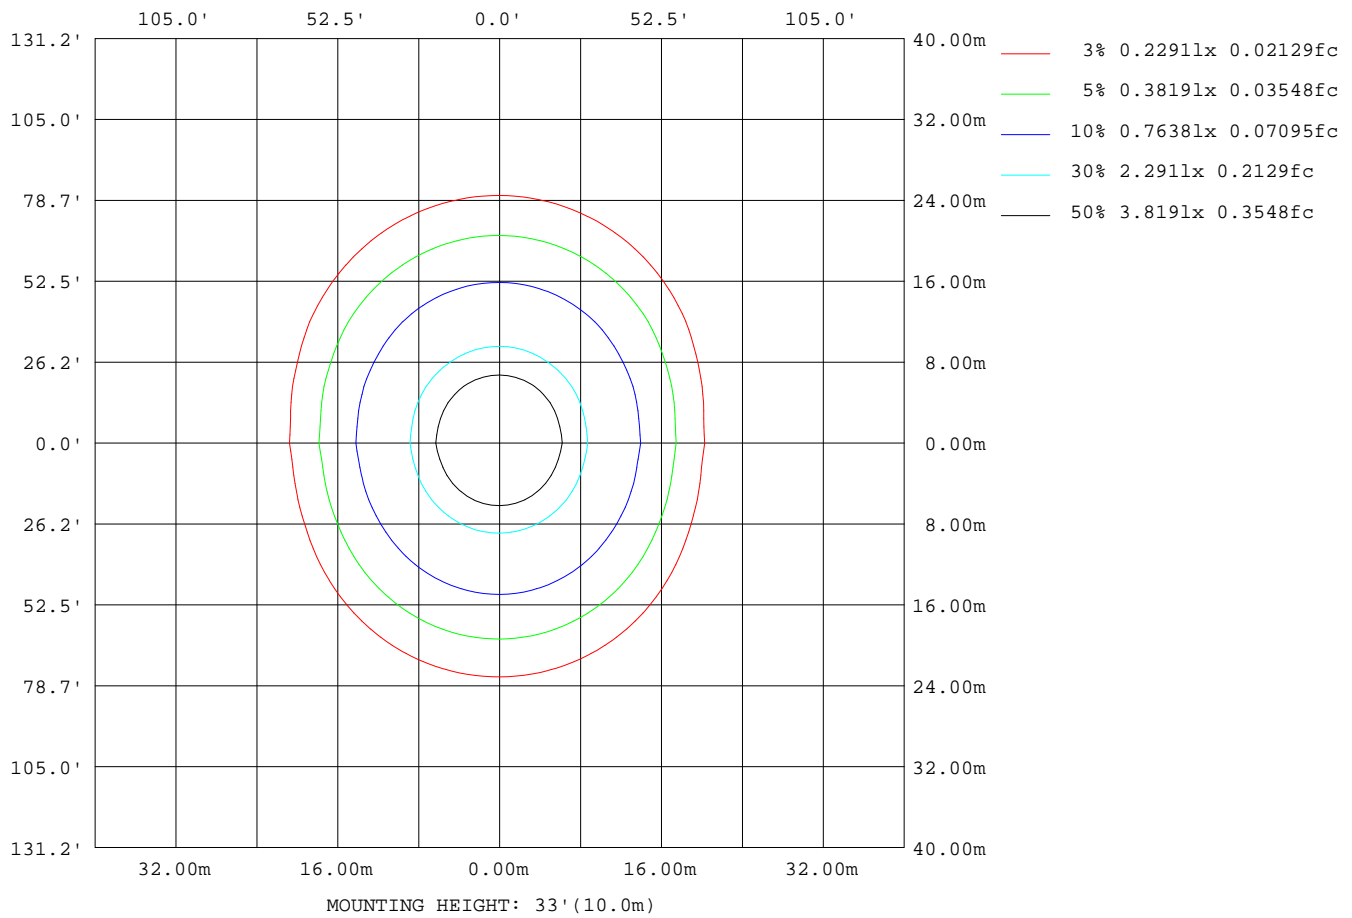

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-04-29

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.290
Humidity: 65.0%
Test Distance: 8.800m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.4V I:0.1746A P:20.85W PF:0.9916 Lamp Flux:2547.99x1 lm		
NAME: MRS4-20/D10/U/50	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:


AvgL	cd/m2
L_0~180(65)av	9707
L_0~180(75)av	7815
L_0~180(85)av	3617
L_90~270(65)av	15379
L_90~270(75)av	20333
L_90~270(85)av	48075
L_45(65)av	12903
L_45(75)av	15692
L_45(85)av	33099

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-04-29

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

Planar Illuminance Curve

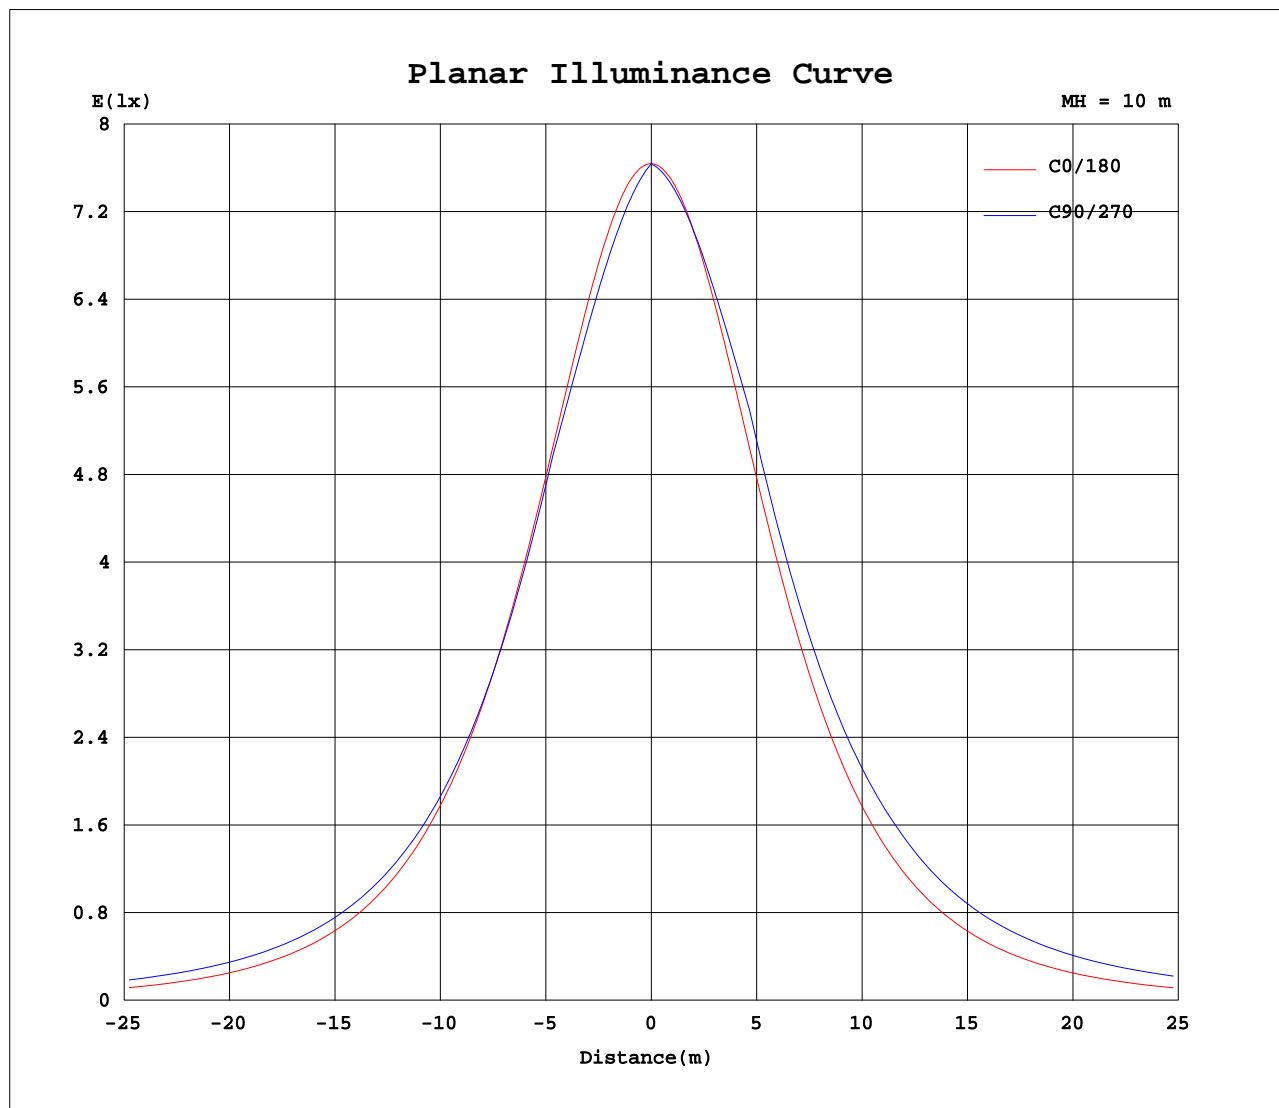

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-04-29

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.290
Humidity: 65.0%
Test Distance: 8.800m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

[illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-04-29

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--2

UNIT: cd

[illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-04-29

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--3

UNIT: cd

[illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-04-29

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--4

UNIT: cd

[illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-04-29

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

```