MULTI CCT

MULTI WATTAGE

RENO SMART

PRIME R

PRISM SERIES

LED CENTER BASKET TROFFER

DESCRIPTION

RENO Lighting's Prism Series offers an innovation twist for the Center Basket LED Troffer. Angled lens provides depth, and the convenience of Multi CCT & Wattage provides ease of installation, making any application perfectly illuminated.

FEATURES

- DLC Premium
- Multi CCT & Wattage
- Housings fabricated from 22-gauge, cold-rolled steel
- Matte-white powder coat
- Available in 1'x4', 2'x2' & 2'x4'
- Rated Lifetime L70(hrs): >70,000
- Damp location
- 0-10V Dimming
- Optional PIR sensor available
- 7 year warranty

APPLICATIONS

- Commercial/Office Building
- Hospitals
- Office

DLC LISTED PREMIUM · UL CERTIFIED · MULTI CCT · MULTI POWER · DUAL VOLTAGE 120-347V

DAMP · DIMMABLE · 7 YR WARRANTY

SPECIFICATION

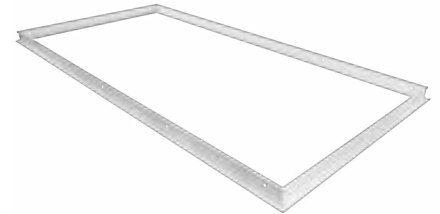| ORDER#	MODEL#	WATTS	SIZE	VOLTAGE (V)	LUMENS	BEAM ANGLE	CCT (K)
R37004	RENO-14CTF-UNV/347-MWMCCT	15/19/24/29W	1'X4'	120-347V	1950/2470/ 3120/3770 lm	110°	35/40/50K
R37005	RENO-22CTF-UNV/347-MWMCCT	15/19/24/29W	2'X2'	120-347V	1950/2470/ 3120/3770 lm	110°	35/40/50K
R37006	RENO-24CTF-UNV/347-MWMCCT	29/34/39/49W	2'X4'	120-347V	3770/4420/ 5070/6370 lm	110°	35/40/50K

ACCESSORIES OPTIONS

ORDER#	MODEL#	DESCRIPTION
R39211	RENO-RFK14	Recessed Trim Kit for 1'x4' Flat Panel
R39212	RENO-RFK22	Recessed Trim Kit for 2'x2' Flat Panel
R39213	RENO-RFK24	Recessed Trim Kit for 2'x4' Flat Panel

RENO-RFK14

RENO-RFK22

RENO-RFK24

RENO SMART NLC SYSTEM ACCESSORIES

ORDER#	MODEL#	DESCRIPTION
R75003	RENO-RS-BPRN-12V	Fixture Mounted Blue PIR Sensor (Quick Connector)
R75201	RENO-RS-GW-BCNW	Ceiling Mounted Gateway for RENO Smart NLC System
R75302	RENO-RS-RC-BNNG	7-Key Smart Wall Switch for RENO Smart NLC System
R75301	RENO-RS-RC-BNNN	5-Key Reset Remote

RENO-RS-BPRN-12V   **RENO-RS-GW-BCNW**   **RENO-RS-RC-BNNG**   **RENO-RS-RC-BNNN**

STANDALONE SENSOR

ORDER#	MODEL#	DESCRIPTION
R74001	RENO-SENSOR-PIR-H	PIR Dimming sensor for Troffer

RENO-SENSOR-PIR-H

STANDALONE SENSOR REMOTE

ORDER#	MODEL#	DESCRIPTION
R73002	RENO-REMOTE-H	Remote Control

RENO-REMOTE-H

1211.6mm (47.7")

12.7mm (.5")

299.7mm (11.8")

53.3mm (2.3")

602mm (23.7")

20.3mm (0.8")

53.3mm (2.3")

602mm (23.7")

1211.6mm (47.7")

20.3mm (0.8")

53.3mm (2.3")

602mm (23.7")