

Date		Project	
Type		Part Number	




ALL-IN-ONE PERFORMANCE LIGHTING

BRILLIANCE Series

VALUE PACK of 6PCS 4" POTLIGHT

Brighten your living room, kitchen, or bathroom with the Brilliance Series recessed pot lights. With its multi-CCT feature, you can easily adjust the lighting ambiance to suit your preference. The round design and white finish blend seamlessly with any decor, providing a modern and clean aesthetic. Easy installation with high-quality mounting spring, quick connectors, and included junction box. The premium aluminum body of this LED slim panel ensures superior durability and aesthetics compared to plastic options. Say goodbye to yellowing with age.

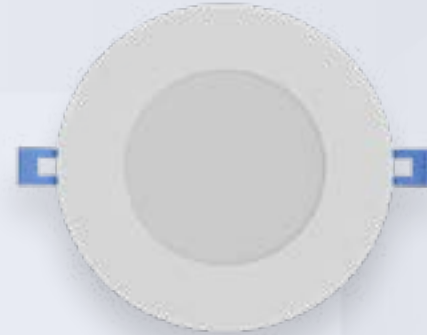

PRODUCT FEATURES

- 6pc Value Pack for jobsite convenience
- Energy-Star, JA8 compliant
- FT6-Rated Cable
- IC-rated and Air-Tight ready and may be in direct contact with insulation
- Compatible with Soffit installations and can be installed in shallow plenum spaces
- Flicker-free 120V forward-phase Triac dimming down to 10%
- 277-347V Driver Option Available
- Damp location suitable
- Operating temperature: -4°F to +122°F (-20°C to +50°C)
- Rated Lifetime L70(hrs): >50,000
- 5 year warranty

KEY SPECIFICATIONS

Voltage	120V
Wattage	12W
Size	4"
Power Factor	>0.9
CCT	27/30/35/40/5000K
CRI	>80
Lumens	Up to 947 lm
Beam Angle	108°
Dimming	120V TRIAC Dimming
Mounting	Recessed
Applications	Gallery, Retail, Residential, Office




EMERGENCY
BACKUP READY

SPECIFICATIONS – 4" VALUE PACK (12W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R36141	RENO-4-S12W-MCCT-WH-6P	12W	120V	795 lm	66 lm/W	2700K
				904 lm	75 lm/W	3000K
				947 lm	79 lm/W	3500K
				942 lm	78 lm/W	4000K
				837 lm	70 lm/W	5000K

ACCESSORIES – MOUNTING



R39108
RENO-MP4
4" Mounting Plate without Clip



R39105
RENO-HBL012-347V-D
AC277-347V driver for 4"
potlights



R39101
RENO-4-GR
4" Goof Ring

Order#	Model	Description
R39108	RENO-MP4	4" Mounting Plate without Clip
R39105	RENO-HBL012-347V-D	AC277-347V driver for 4" Potlights
R39101	RENO-4-GR	4" Goof Ring

ACCESSORIES – EMERGENCY LED DRIVERS





R83000
 RENO-EM-H08
 Emergency LED Driver
 (100-347V AC, 50-60Hz, 12W)

Order#	Model	Description
R83000	RENO-EM-H08	Emergency LED Driver (100-347V AC, 50-60Hz, 12W)



PHOTOMETRICS

12W - 2700K

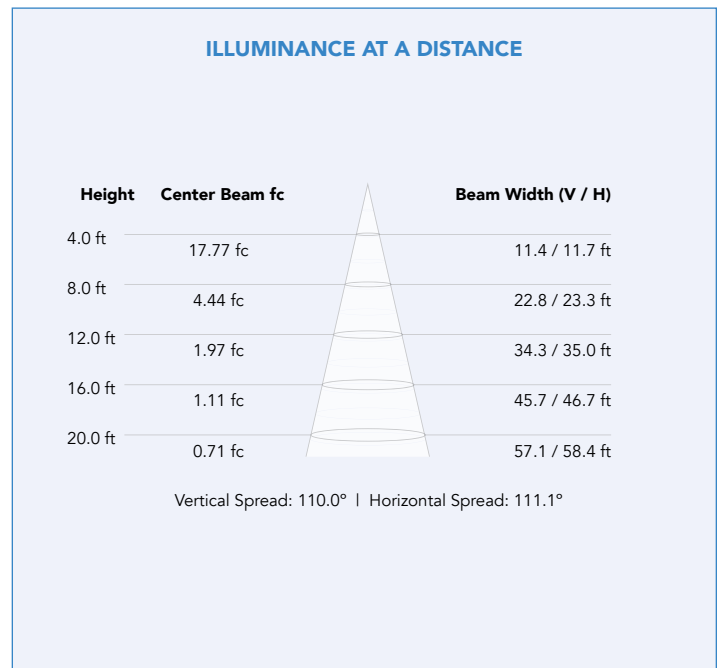
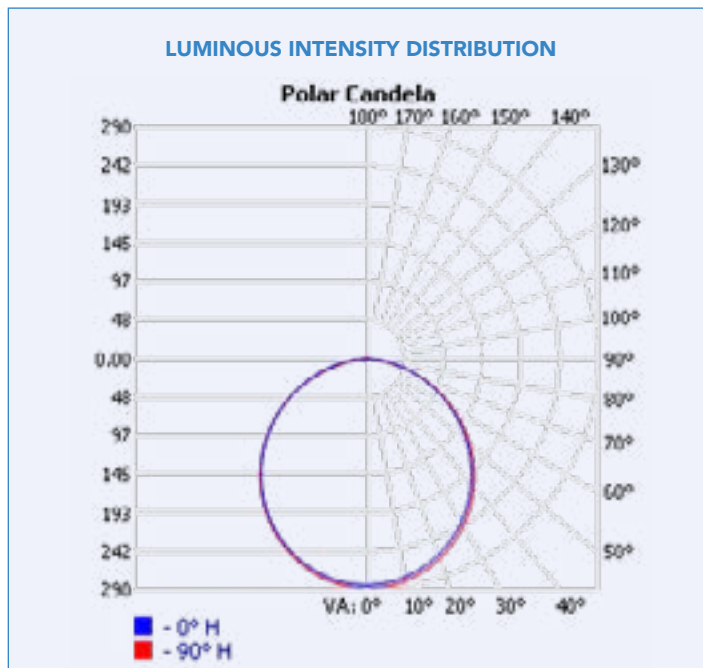






PHOTOMETRICS

12W - 3000K

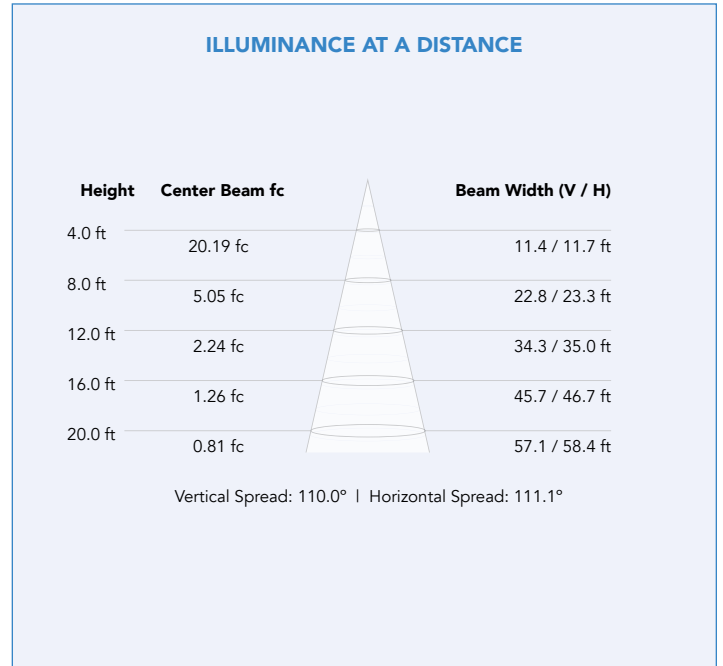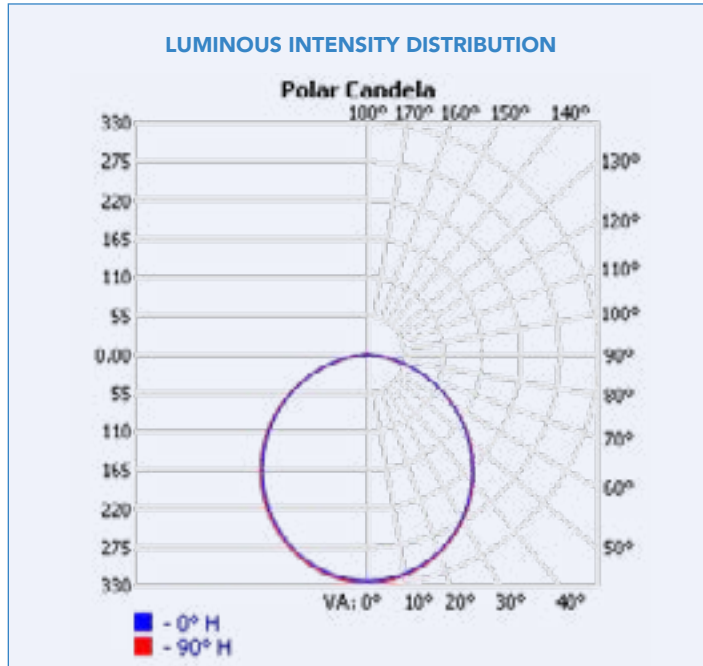


12W - 3500K

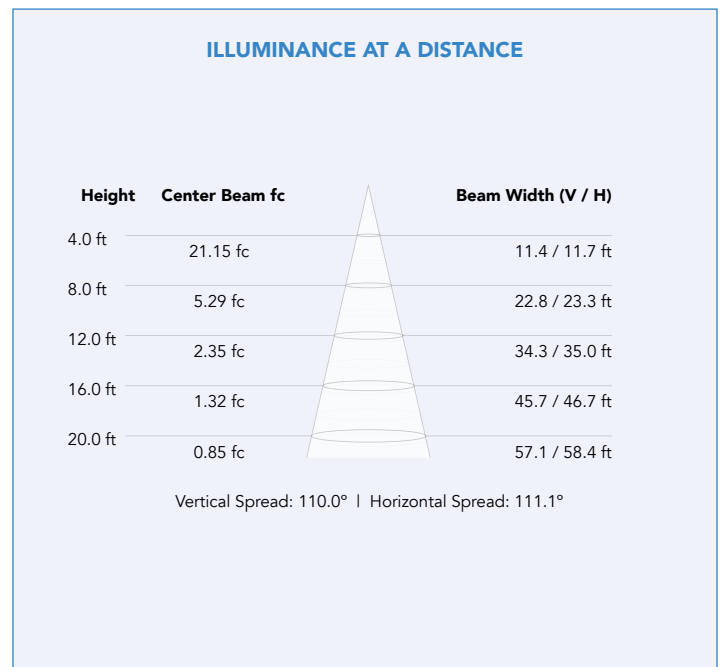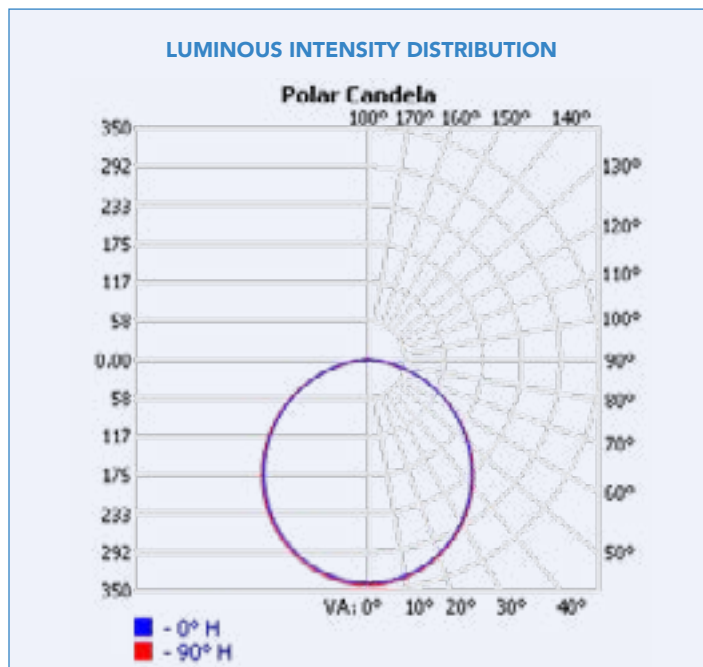

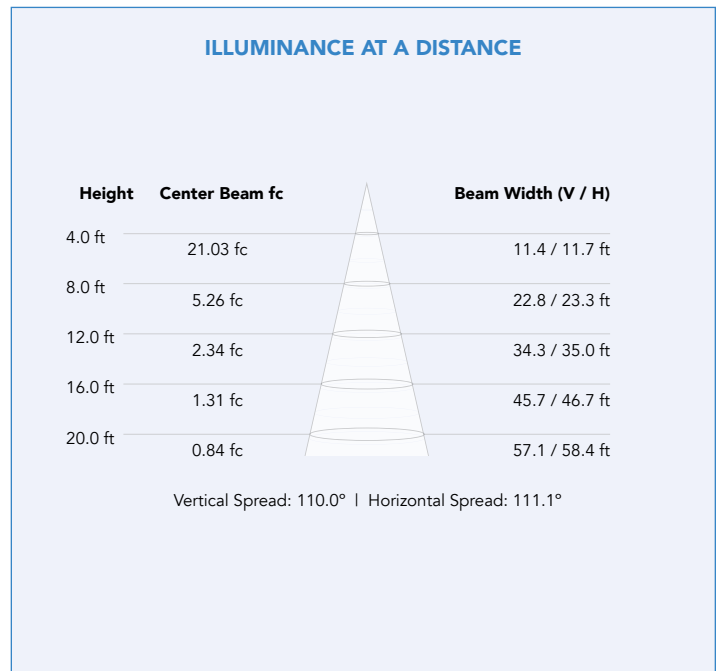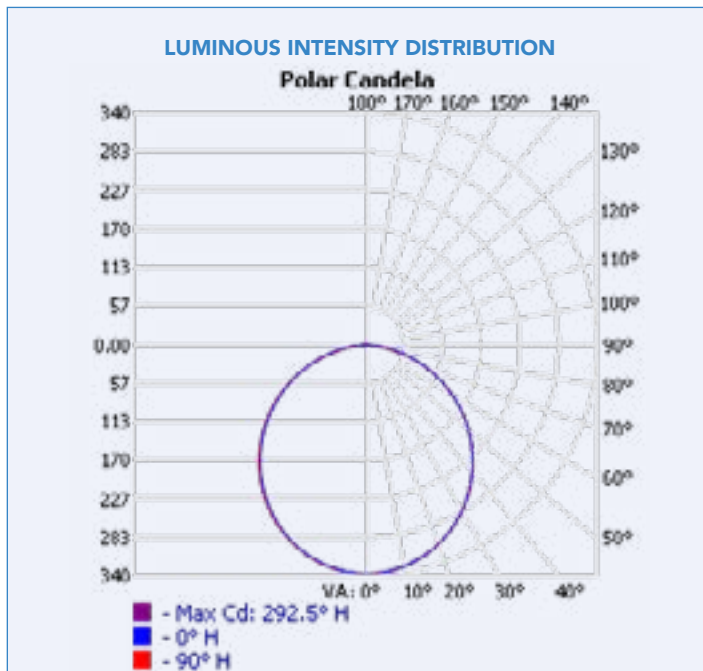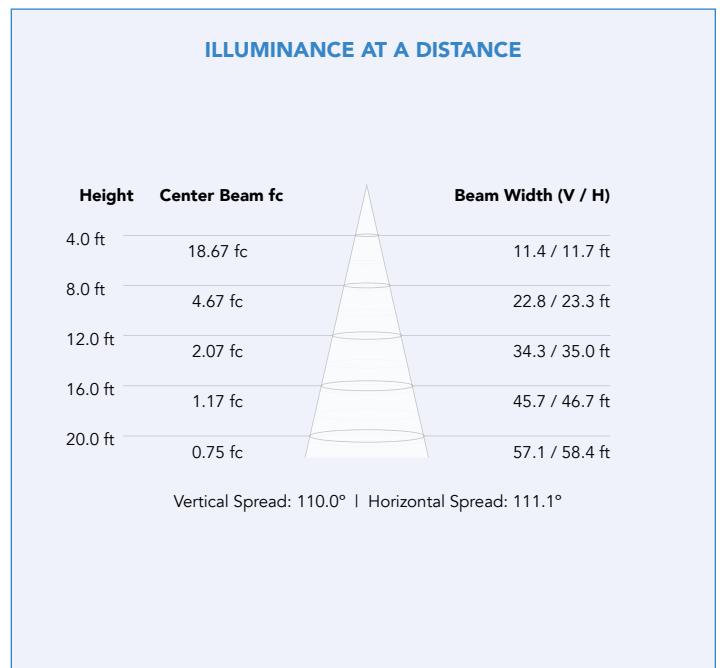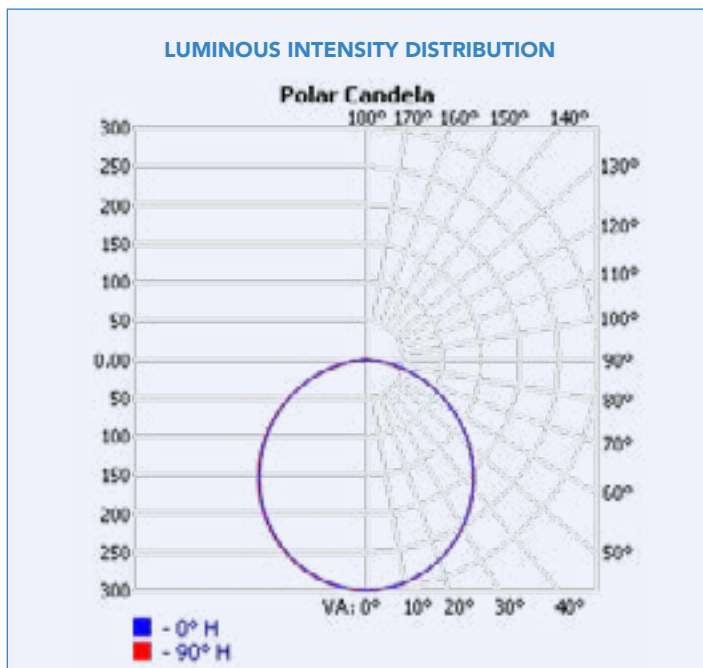12W - 4000K

12W - 5000K


DIMENSIONS

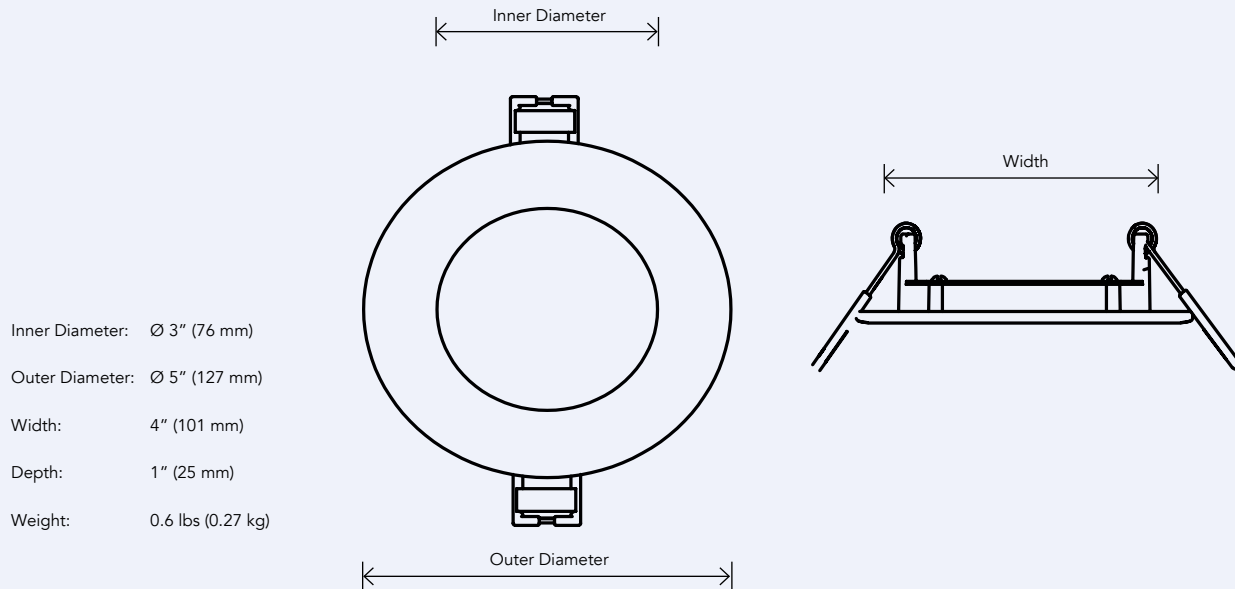4" POTLIGHT



4" DRIVER

