

## Installation for RENO-LED-AURA-35-S36W-5CCT-WH-SQ

### ⚠ WARNING

TURN THE POWER OFF FROM ELECTRICAL PANEL BEFORE INSTALLATION OR MAINTENANCE.

- DO NOT MODIFY THIS FIXTURE. ANY MODIFICATIONS MAY RENDER THE PRODUCT UNSAFE AND VOID WARRANTY.
- THIS PRODUCT IS SUITABLE FOR WET LOCATIONS

### FIXTURE INSTALLATION

**STEP 1.** Measure distance from walls and mark position of fixture to be installed on the the ceiling.

**STEP 2.** Carefully scribe hole template in accordance to cut hole size on desired location.

**STEP 3.** Carefully cut hole in ceiling. (Fig. 1)

**STEP 4.** Electrical connections.


**STEP 5.** Select Color Temperature

**STEP 6.** Connect hardwire box to engine by connecting the quick male and female connector. (Fig. 2)


**STEP 7.** Pass the hardwire box and attached bx cable through the hole and place on straight surface inside the ceiling cavity. (Fig. 3)

**STEP 8.** Push the spring clip up towards the LED engine. (Fig. 4)


**STEP 9.** Push the fixture through the hole until the trim is flush with the ceiling. Spring clip will retract to hold trim in place.

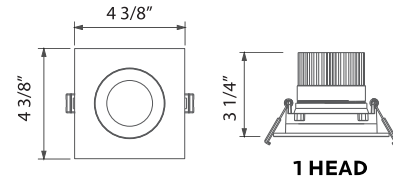






1 HEAD

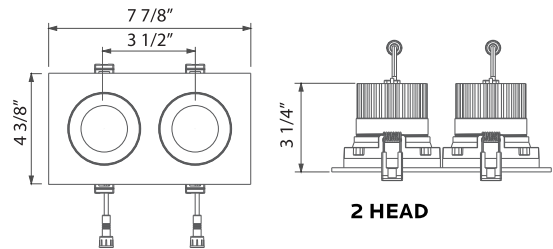




2 HEAD

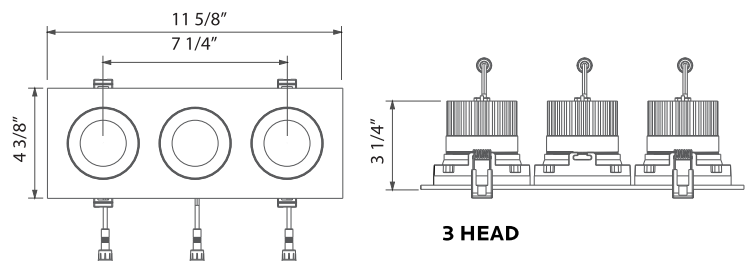

3 HEAD

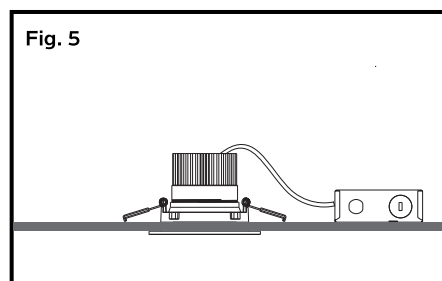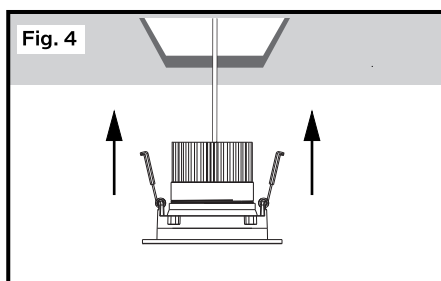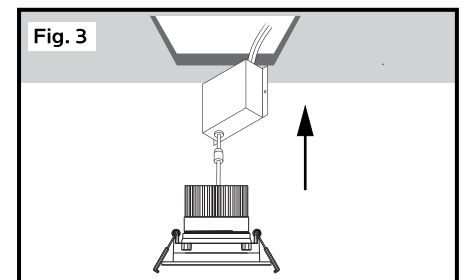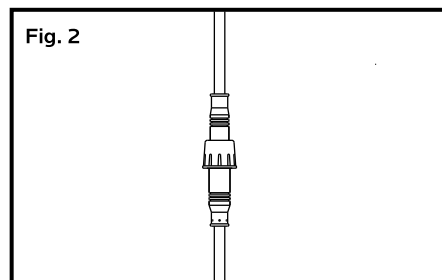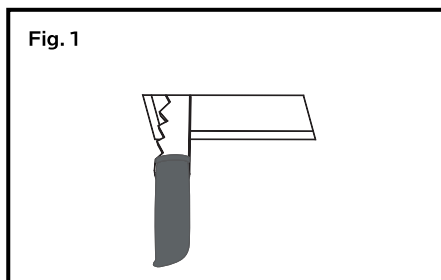

- 1 HEAD**  Cutout:  
3.75" (95 mm)
- 2 HEAD**  Cutout:  
7.25" x 3.75"  
(185 mm x 95 mm)
- 3 HEAD**  Cutout:  
10.82" x 3.75"  
(275 mm x 95 mm)