


Date		Project	
Type		Part Number	

SABRE Series

Linear Strip with Sensor

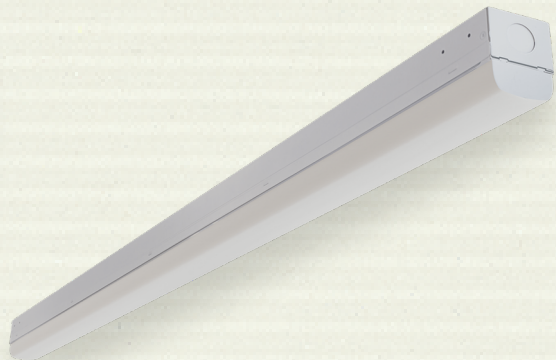

Reno Lighting's Sabre Series LED ECO Commercial Strip fixture features a polycarbonate diffuser that provides impact resistance and even light distribution while emitting low glare. Combine this with powerful, high-output LED chips, these fixtures meet today's stringent efficacy standards, bringing your projects maximum energy savings while providing exceptional light levels! With our new built-in Microwave dimming sensor we take your energy savings a step further by giving you: stand-by dimming, daylight harvesting, occupancy/vacancy settings coupled with high level trimming!



PRODUCT FEATURES

- DLC Premium for the Stairwell and Passageway Luminaires
- Integrated microwave sensor
- Factory Default Sensor Settings: Dim to 30% after 5 mins no motion. Remains until Motion Detected
- Remote needed to configure settings outside of factory default range
- Surface or Suspension mounting options
- Frosted Polycarbonate Lens
- Includes J-Box Coverplate and V-Hangers
- Damp location suitable
- Rated Lifespan: L70 ~100,000 hrs
- Operating temperature: -22°F to +122°F (-30°C to +50°C)
- 5 year warranty

KEY SPECIFICATIONS

Voltage	120-347V
Wattage	Selectable Wattage: 4ft - 20/30/40W 8ft - 40/60/80W
Lengths	4ft & 8ft
Power Factor	>0.9
CCT	Selectable: 35/40/5000K
CRI	>80
Lumens	Up to 9,627 lm
Beam Angle	120°
Dimming	0-10V
Mounting	Surface, & Suspension
Applications	Commercial, Industrial, Warehouse, Retail Facilities



EMERGENCY
 BACKUP READY

SPECIFICATIONS - 4FT 20/30/40W

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R33024	RENO-LSN4-DV-MW-MCCT-ECO-MS	20W	120-347V	2,468 lm	123 lm/W	3500K
				2,596 lm	130 lm/W	4000K
				2,547 lm	127 lm/W	5000K
		30W	120-347V	3,524 lm	117 lm/W	3500K
				3,737 lm	124 lm/W	4000K
				3,627 lm	121 lm/W	5000K
		40W	120-347V	4,661 lm	116 lm/W	3500K
				4,962 lm	124 lm/W	4000K
				4,806 lm	120 lm/W	5000K


SPECIFICATIONS - 8FT 40/60/80W

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R33025	RENO-LSN8-DV-MW-MCCT-ECO-MS	40W	120-347V	5,191 lm	129 lm/W	3500K
				5,358 lm	134 lm/W	4000K
				5,305 lm	132 lm/W	5000K
		60W	120-347V	7,510 lm	125 lm/W	3500K
				7,915 lm	132 lm/W	4000K
				7,655 lm	128 lm/W	5000K
		80W	120-347V	9,055 lm	113 lm/W	3500K
				9,627 lm	120 lm/W	4000K
				9,209 lm	115 lm/W	5000K


DLC CERTIFICATION

Order#	Model	Application	DLC Standard	DLC Premium
R33024	RENO-LSN4-DV-MW-MCCT-ECO-MS	Direct Linear Ambient Luminaires	P08KVTQ4	S-GDKTHN
		Low-Bay Luminaires	P7PE6VBL	S-WNSBMM
		Stairwell and Passageway	-	S-HW7DV6
R33025	RENO-LSN8-DV-MW-MCCT-ECO-MS	Luminaires for Ambient Lighting	P7SRLY9D	S-LBSCXC
		Low-Bay Luminaires	PACGMLP7	S-6XCMTH
		Stairwell and Passageway	-	S-S2YQ50

ACCESSORIES – MOUNTING



R39307
I-BRACKET
I-Bracket for the ECO Linear Strip



R39204
RENO-RP
Suspension Kit

Order#	Model	Description
R39307	I-BRACKET	I BRACKET for Continuous Installation with the ECO Linear Strip
R39204	RENO-RP	Suspension Kit

ACCESSORIES – EMERGENCY BACKUP



R83004
RENO-EM-C08
Emergency LED Driver (100-347V AC, 50-60Hz, 8W)

Order#	Model	Description
R83004	RENO-EM-C08	Internal Mount Emergency LED Driver (100-347V AC, 50-60Hz, 8W)

ACCESSORIES – STANDALONE REMOTES





R73002
RENO-REMOTE-H
Remote Control for Standalone
Sensors (With Screen)



R73005
RENO-REMOTE-H-ECO
Remote Control for Standalone
sensors (Without Screen)

Order#	Model	Description
R73002	RENO-REMOTE-H	Remote Control for Standalone Sensors (With Screen) Note: Only 1 needed per project
R73005	RENO-REMOTE-H-ECO	Remote Control for Standalone sensors (Without Screen) Note: Only 1 needed per project

PHOTOMETRICS - 4FT 40W/4K

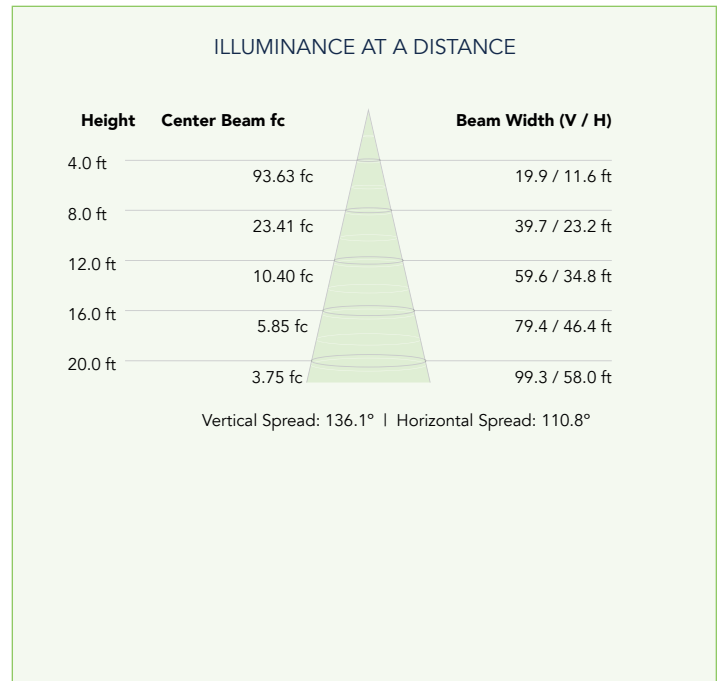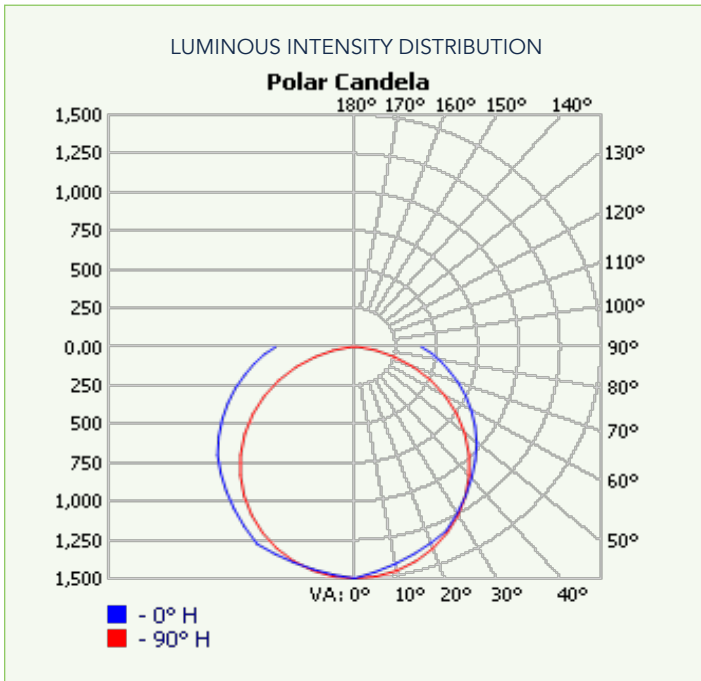


PHOTOMETRICS - 8FT 80W/4K

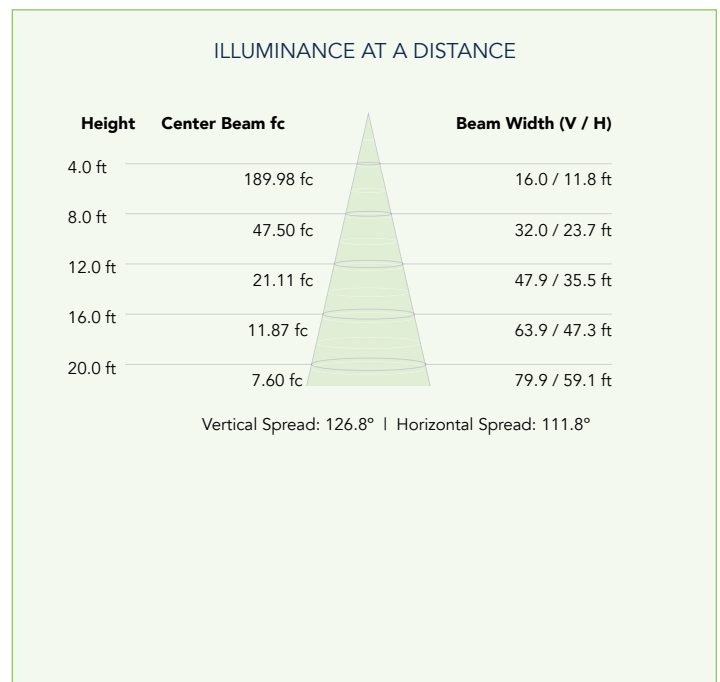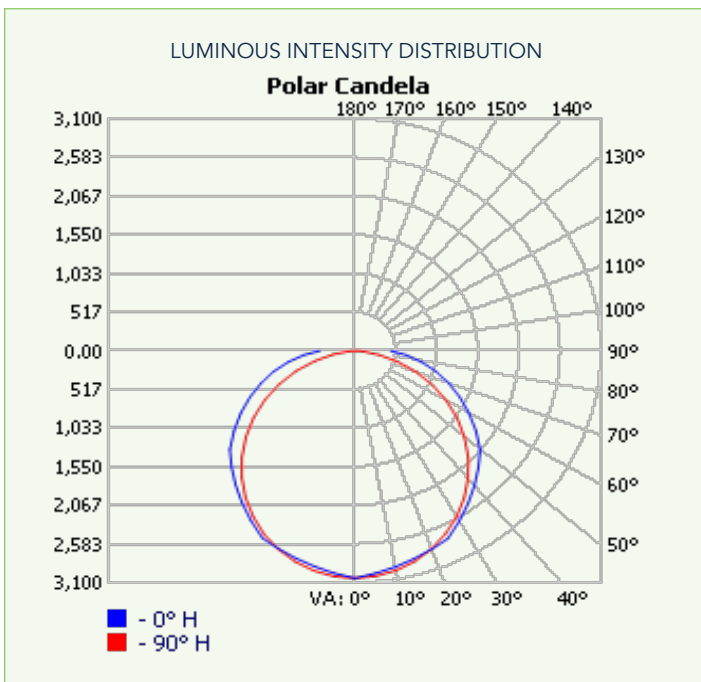


DIMENSIONS


4FT



Width: 2.1" (53.3 mm)
 Height: 2.5" (63.5 mm)
 Length: 48" (1219 mm)
 Weight: 2 lbs (0.90 kg)



8FT



Width: 2.1" (53.3 mm)
 Height: 2.5" (63.5 mm)
 Length: 96" (2438 mm)
 Weight: 7 lbs (3.17 kg)

