

Date		Project	
Type		Part Number	


 THE EVERYDAY COMPETITIVE OPTION

AIM Series

Back-Lit Flat Panel



RENO Lighting's Aim series backlit panel with Multi-CCT/ Multi-Wattage technology is a versatile lighting fixture. With even light distribution and a seamless design, the Aim Series technologies allow for numerous configurations of light in one fixture, making it extremely versatile to suit various application needs. This panel is proven efficient and provides uniform light with a long maintenance-free life.



PRODUCT FEATURES

- DLC Premium
- Surface Mount, T-Grid, or Suspended Installation
- Formed SPCC cold-rolled steel with powder-coated White finish
- PMMA Lens
- Backlit technology that offers even light distribution without shadowing
- Available in 2x4
- Damp location suitable
- Rated Lifespan: L70 ~100,000 hrs
- Operational Temperature: -4°F to +122°F (-20°C to +50°C)
- 5 year warranty

KEY SPECIFICATIONS

Voltage	120-347V
Wattage	Selectable Wattage: 2x4 - 30/40/50W
Sizes	2x4
Power Factor	>0.9
CCT	Selectable: 35/40/5000K
CRI	>80
Lumens	Up to 6,550 lm
Beam Angle	125°
Dimming	0-10V
Mounting	Surface, T-Grid, & Suspension
Applications	Commercial, Industrial, Warehouse, Retail Facilities



EMERGENCY
 BACKUP READY


SPECIFICATIONS- 2X4 30/40/50W

Order#	Model	Voltage	Wattage	Lumens	Efficacy	CCT
R35307	RENO-24BLPL-DV-MW-MCCT-ECO	120-347V	30W	3,989 lm	133 lm/W	3500K
				4,128 lm	137 lm/W	4000K
				4,052 lm	135 lm/W	5000K
			40W	5,082 lm	127 lm/W	3500K
				5,306 lm	133 lm/W	4000K
				5,170 lm	129 lm/W	5000K
			50W	6,138 lm	123 lm/W	3500K
				6,455 lm	129 lm/W	4000K
				6,242 lm	125 lm/W	5000K


DLC CERTIFICATION

Order#	Model	Application	DLC Standard	DLC Premium
R35307	RENO-24BLPL-DV-MW-MCCT-ECO	Luminaires for Ambient Lighting	-	S-YSL4BP
		Low-Bay Luminaires	-	S-6NPSN0

ACCESSORIES – MOUNTING



R39213
RENO-RFK24
Recessed Flange Kit for 2x4



R39203
RENO-SMK24
Surface Mounted Kits for 2x4




R39204
RENO-RP
Suspension Kit



R39114
RENO-BLPL-JB
Expansion junction box

Order#	Model	Description
R39213	RENO-RFK24	Recessed Flange Kit for 2x4
R39203	RENO-SMK24	Surface Mounted Kit for 2x4
R39204	RENO-RP	Suspension Kit
R39114	RENO-BLPL-JB	Expansion Junction Box for R35307



ACCESSORIES – EMERGENCY BACKUP



R83001
 RENO-EM-H15
 Emergency LED Driver (100-347V AC, 50-60Hz, 15W)

Order#	Model	Description
R83001	RENO-EM-H15	Emergency LED Driver (100-347V AC, 50-60Hz, 15W)

PHOTOMETRICS - 2X4 50W/4K

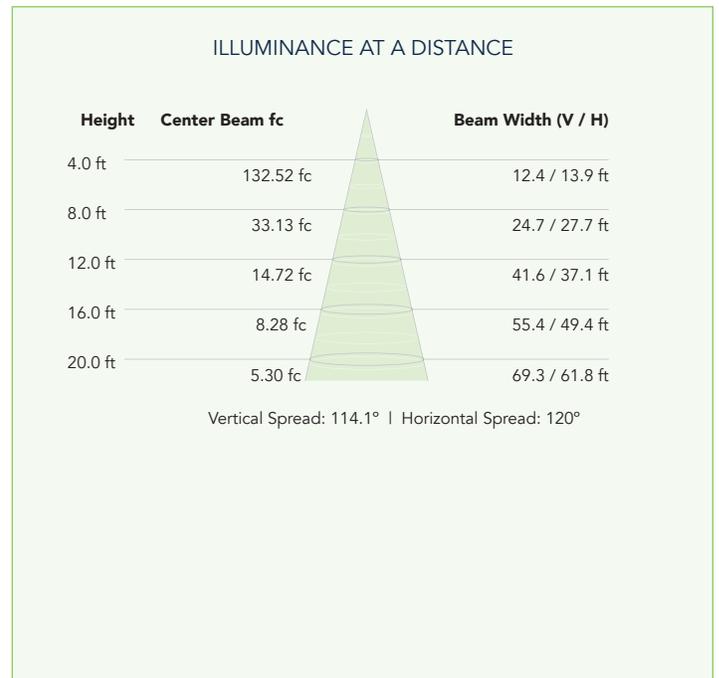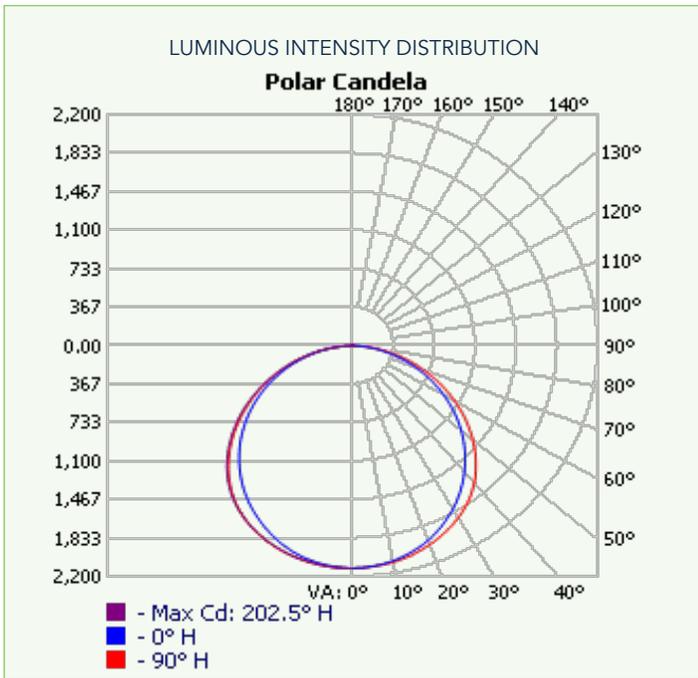

DIMENSIONS

